


Integrated LED Color Selectable Square Vanity

RONNING BATH VANITY

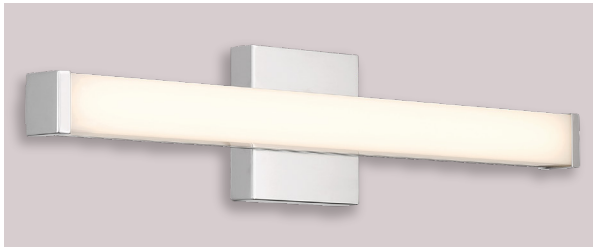


PRODUCT DESCRIPTION

Ronning Bath Vanity fixtures are both functional and highly versatile. This collection is available in 5 sizes and 4 finish's.

All models come with a built on CCT selectable switch which allows you to choose the right light color to suit any space or personal needs.

FEATURES

- Square acrylic lens
- Adjustable Color Temperature (27K, 30K, 35K, 40K, 50K)
- CRI 90+
- Damp location listed
- Triac and ELV dimming
- High Lumen Output
- 120V Input Voltage
- Beam Angle of 140°
- 5 Year Limited Warranty

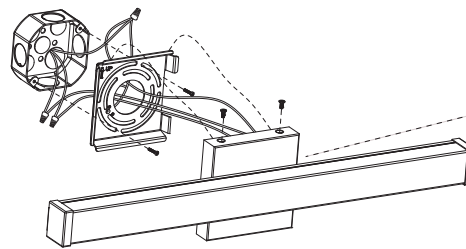

CCT COLOR SELECTABLE SWITCH



Item	Size (LxHxExt.)	Finish	Wattage	Delivered Lumens (3000K)
47082-032	18" x 2" x 2.5"	Brushed Nickel	20W	1485 lm
47082-025	18" x 2" x 2.5"	Chrome	20W	1475 lm
47082-049	18" x 2" x 2.5"	Black	20W	1355 lm
47082-018	18" x 2" x 2.5"	Gold	24W	1661 lm
46818-010	24" x 2" x 2.5"	Brushed Nickel	24W	1784 lm
46818-027	24" x 2" x 2.5"	Chrome	24W	1773 lm
46818-034	24" x 2" x 2.5"	Black	24W	1630 lm
46818-041	24" x 2" x 2.5"	Gold	24W	1661 lm
46819-017	30" x 2" x 2.5"	Brushed Nickel	27W	2010 lm
46819-024	30" x 2" x 2.5"	Chrome	27W	2018 lm
46819-031	30" x 2" x 2.5"	Black	27W	1941 lm
46819-044	30" x 2" x 2.5"	Gold	27W	1972 lm
46820-013	36" x 2" x 2.5"	Brushed Nickel	30W	2300 lm
46820-020	36" x 2" x 2.5"	Chrome	30W	2338 lm
46820-035	36" x 2" x 2.5"	Black	30W	2223 lm
46820-043	36" x 2" x 2.5"	Gold	30W	2346 lm
46821-010	48" x 2" x 2.5"	Brushed Nickel	38W	3129 lm
46821-027	48" x 2" x 2.5"	Chrome	38W	3087 lm
46821-036	48" x 2" x 2.5"	Black	38W	2850 lm
46821-045	48" x 2" x 2.5"	Gold	38W	2076 lm

MATERIAL:

Corrosion resistant aluminum, Shatter resistant acrylic lenses.

AVAILABLE SIZES:

18" | 24" | 30" | 36" | 48"

FINISH OPTIONS:

- Black (BK)
- Chrome (CH)
- Brushed Nickel (BN)
- Gold (GD)

RATING & ELECTRICAL APPROVAL

cETLus
Damp Location (Listed)
Energy Star (Certified)
Title 24 - JA8 (Certified)
ADA Compliant



ADDITIONAL:

Installs vertically or horizontally over octagon box
Rated life 50,000 hours
Operating Temperature: -20°C (-4°F), 40°C (104°F)

*Spec Sheets and Photometrics can be found online.