

Catalog Number
Notes
Type

FEATURES & SPECIFICATIONS

INTENDED USE — Single and twin LED remote lamps for indoor and outdoor applications, for use as part of an emergency lighting system, providing light for path of egress.

CONSTRUCTION — Indoor remote heads are injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic, white or black finish.

Weather-proof (WP) are engineering grade, high-impact resistant thermoplastic, sealed and gasketed, gray or black finish. For use in damp and wet location areas.

Compatible with EU2L REM, ECC REM.

Fully adjustable lamp heads.

Suitable for wall or ceiling mount. Mounts to a single-gang switch box.

OPTICS — The typical life of the LED is 10 years.

Indoor remotes (ERE) have one, 0.75W white LED per lamp head. To be powered from low-voltage power sources (3.6V only).

Weather-proof (ERE SGL WP) have eight, 1W total, white LEDs per lamp head.

Weather-proof (ERE T WP) have eight, 2W total, white LEDs per lamp head.

ERE WP (single and twin) for use with 3.6V, 6V, 9.6V & 12V sensing power source.

INSTALLATION — Suitable for wall or ceiling mount. Mounts to a single-gang switch box.

LISTINGS — UL Listed with approved Lithonia Lighting products.

Meets UL924, NFPA 101 (current Life Safety Code), NEC, OSHA, Local and State Codes.

Indoor damp location listed (ERE) 50°F to 104°F (10°C to 40°C).

Wet location listed (ERE WP) -4°F to 122°F (-20°C to 50°C)

WARRANTY — 2-year limited warranty. Complete warranty terms located at:

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

NOTE: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Remote Lamps

ERE



ERE B T



ERE B SGL



ERE B SGL WP



ERE B T WP



ERE SGL



ERE T



ERE SGL WP




ERE T WP



MOUNTING AND SPECIFICATIONS

All dimensions are inches (centimeters) unless otherwise indicated.

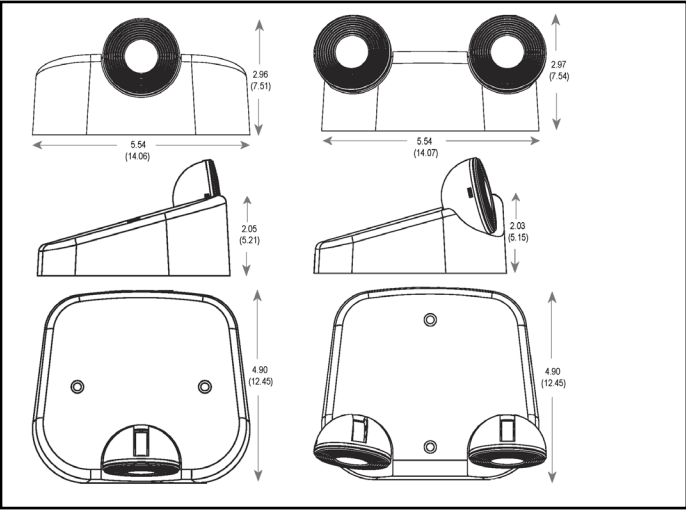

Specifications

Indoor Single Remote (ERE SGL)

Length: 5.54 (14.06)
Depth: 2.05 (5.21)
Height: 4.90 (12.45)
Weight: .55 lbs (.25 kgs)

Specifications


Indoor Twin Remote (ERE T)

Length: 5.54 (14.06)
Depth: 2.03 (5.15)
Height: 4.90 (12.45)
Weight: .60 lbs (.27 kgs)

Specifications

Weather proof Single Remote (ERE SGL WP)

Length: 4.25 (10.80)
Depth (head): 2.25 (5.71)
Depth (base): .87 (2.20)
Height: 6.62 (16.81)
Weight: .65 lbs (.29 kgs)

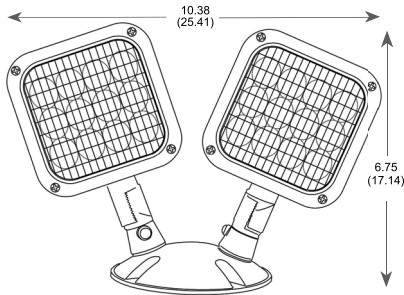

Specifications

Weather proof Single Remote (ERE T WP)

Length: 10.38 (26.37)
Depth (head): 2.25 (5.71)
Depth (base): .87 (2.20)
Height: 6.8 (17.27)
Weight: 1.3 lbs (.54 kgs)

Looking for Contractor Select readily available configurations? Click here to visit Contractor Select™ spec sheet or go to www.contractorselect.com

ORDERING INFORMATION

Example: ERE B SGL

Series	Housing Color	Number of Lampheads	Options
ERE LED Remote lamp	(Blank) White ¹ GY Gray B Black	SGL Single T Twin	(Blank) Not Required WP Weather Proof

COMPATIBLE PRODUCT*				
Type	ERE SGL	ERE T	ERE SGL WP	ERE T WP
EU2L REM	2	1	1	0
ECC R REM ECC G REM	2	1	2	1

* This is in addition to the lamp heads on the product.

Notes
1 White housing color not available with WP option.