


INSTALL BULBS

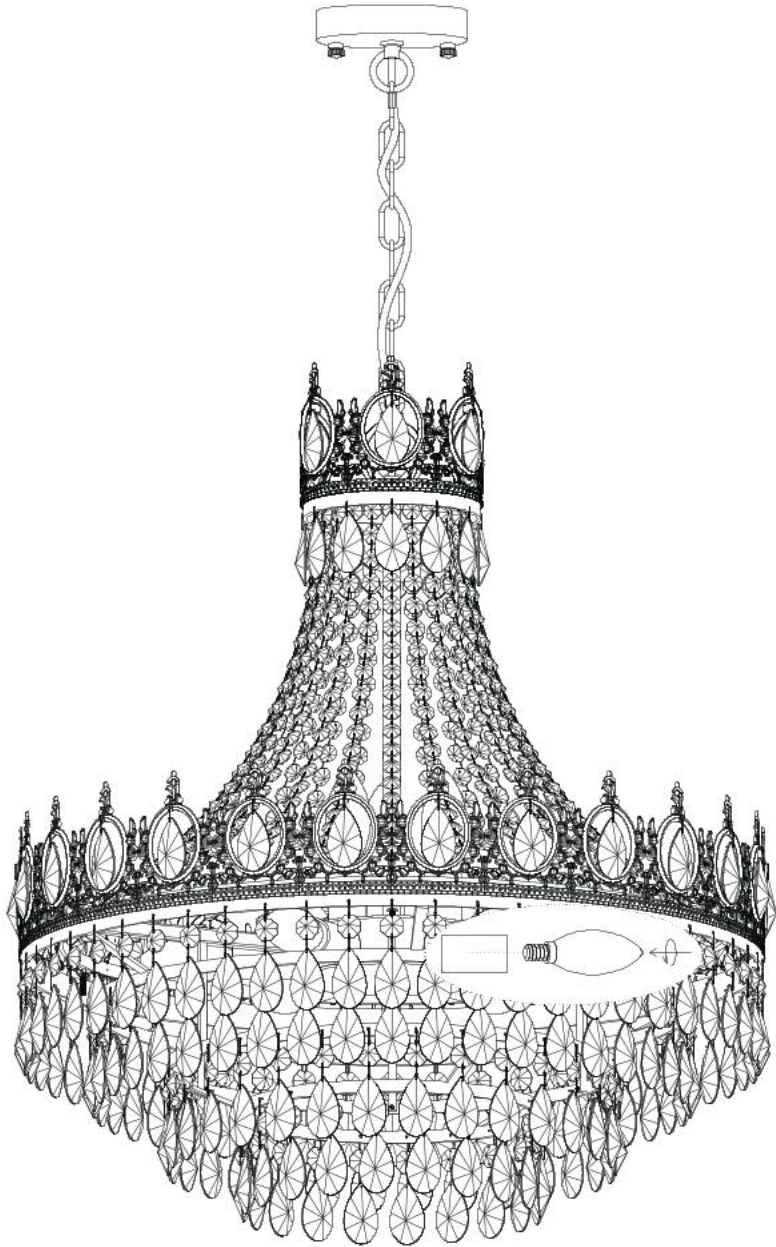


E12 Bulbs X 9
(Max 40W each, not included)

NOTE:
This lamp uses E12 bulbs up to 40W. Fully dimmable when used with dimmable bulbs and compatible dimming switches (not included).

INSTALLATION MANUAL

CHANDELIER
Model No.: HLP445BG-9A

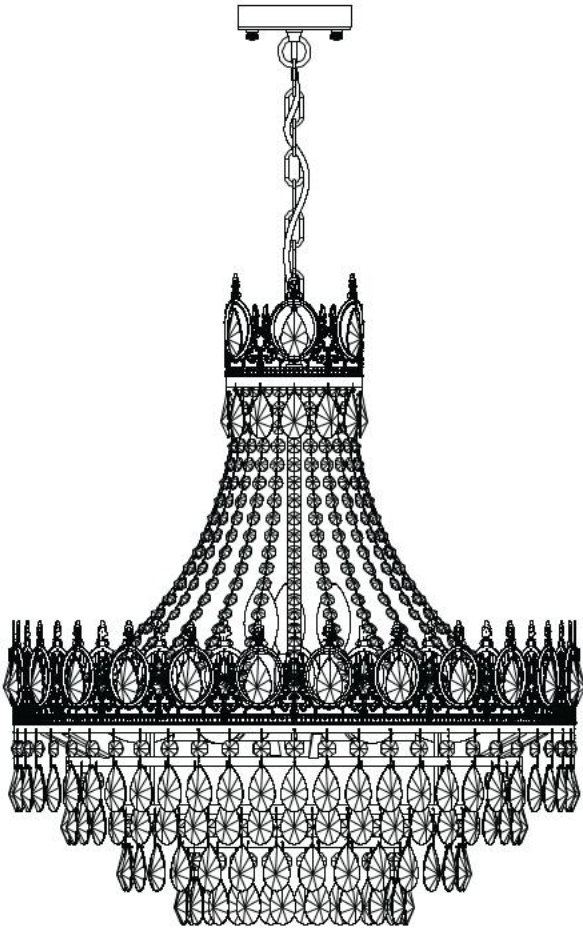

Scan for Installation Video

TOOLS REQUIRED




Ladder



Pliers




Wire Strippers



Screwdrivers

PACKING LIST

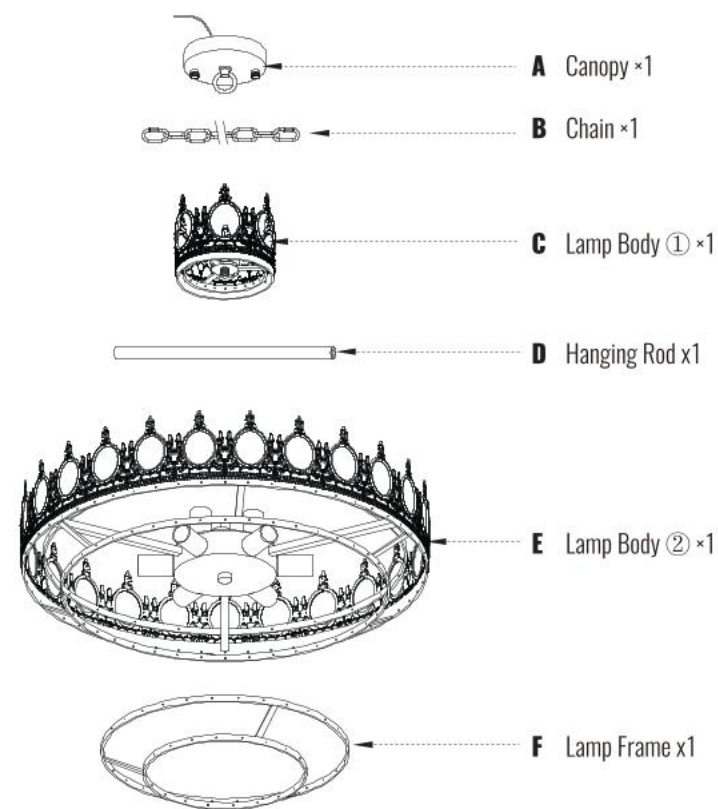


INSTALLATION KIT

AA		1×	BB		2×	CC		2×
Mounting Bracket			Outlet Box Screw			Cap Nut		
DD		1×	EE		3×	FF		3×
Ground Screw			Wire Nut			M5 Screw		
GG		3×	HH		3×	II		25×
M3 Screw			Rod			Octagon Crystal Strand		
JJ		44×	KK		148×	LL		1×
Pear Shaped Crystal			Pear Shaped Crystal Strand			Gloves		

- NOTE:**
1. AA/CC/DD has already been pre-installed with Canopy (A).
 2. FF/GG has already been pre-installed together with HH.
 3. II/JJ has one spare part, and KK has two spare parts.

MOUNTING AND WIRE

1. Install the Mounting Bracket

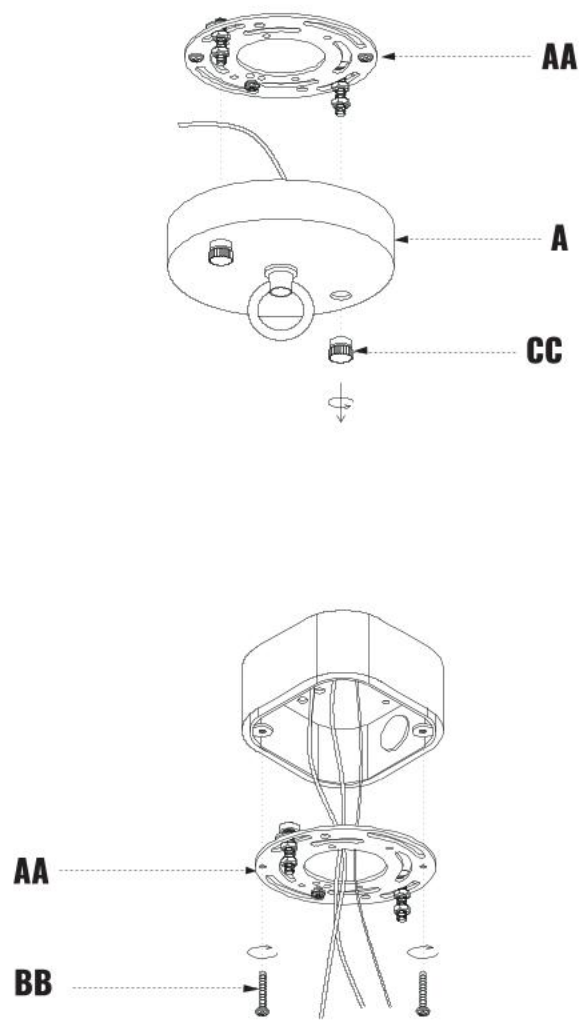

- STEP 1:** Loosen the Cap Nut (CC) from Canopy (A), and take out the Mounting Bracket (AA).
- STEP 2:** Take off the screws from the outlet box, and secure the Mounting Bracket (AA) onto the box with the screws taken off or Outlet Box Screw (BB).