


Please consult your electrician for hanging fixture and wiring.

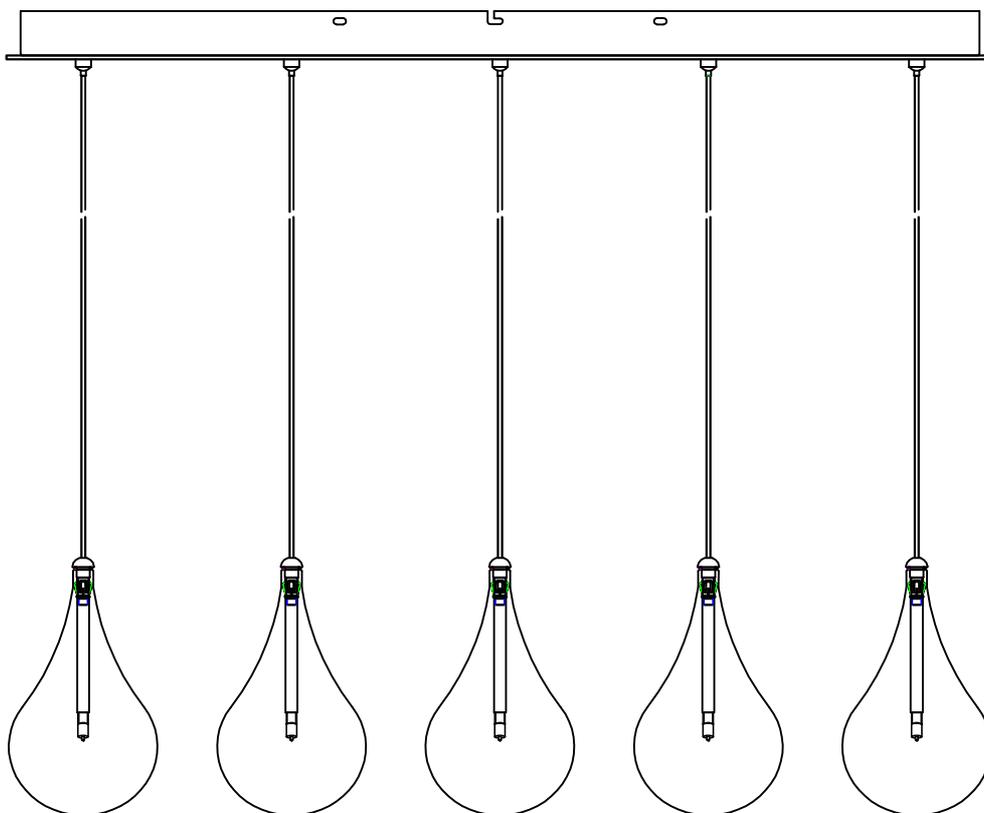


**WARNING:** Wires need to be connected to transformer found in canopy and should not be connected directly to power source or a short may occur



**Caution:** Xenon bulbs get very hot and may burn you. Always make sure bulbs are off for a minimum of 10 minutes before handling. Fixture may be dimmed using an electronic low voltage dimmer.

**Bulbs (Included): 5 x 20 Watt G4**

**IMPORTANT:** Turn off the power at the main fuse or circuit breaker box before starting installation

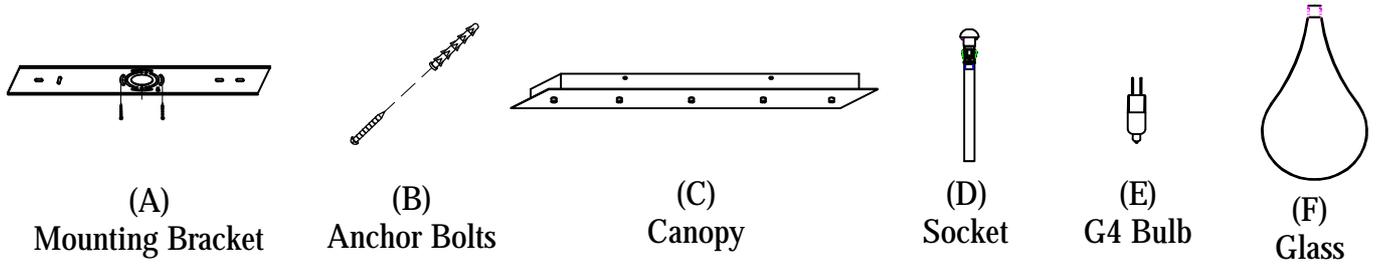


Locate all hardware & components before discarding packaging

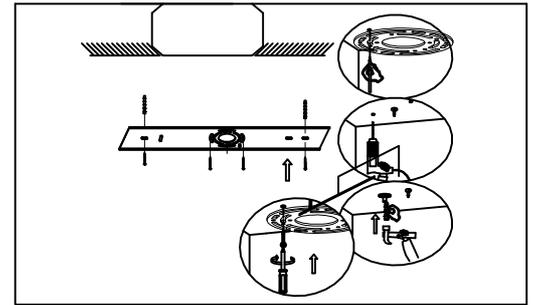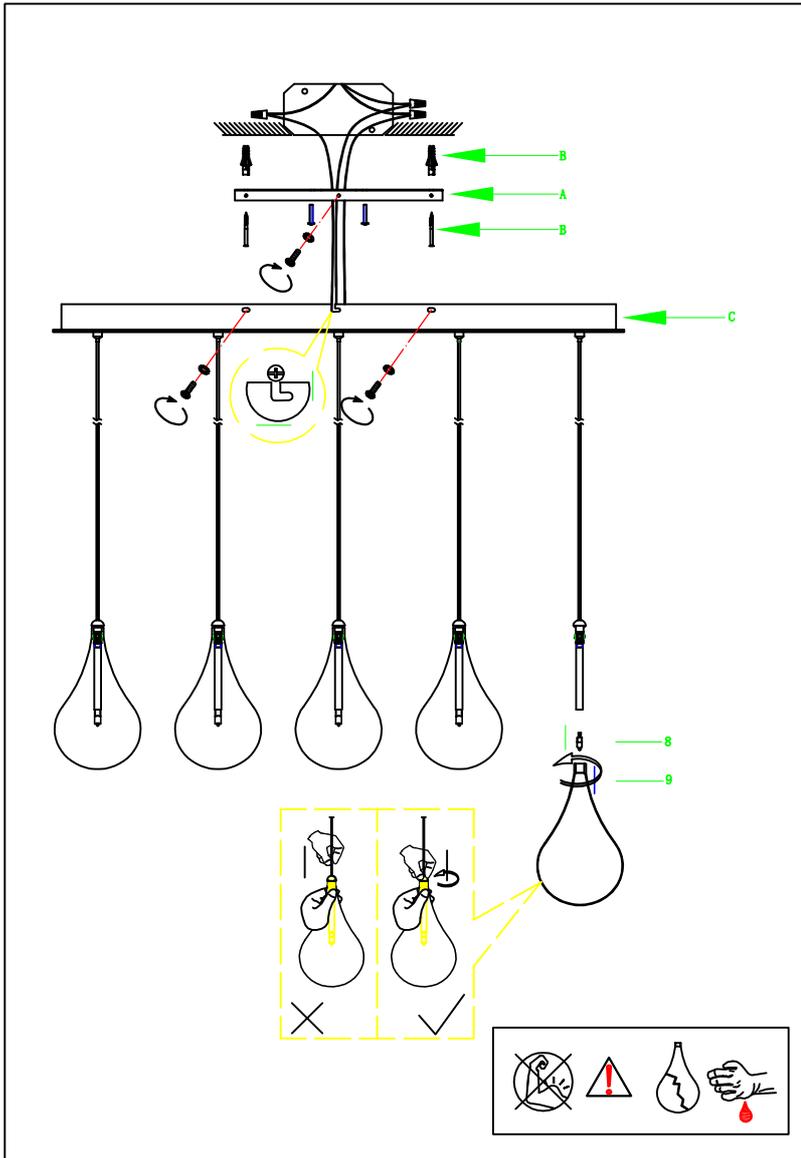


1.)

**Step.1:** Remove mounting bracket (A) and install to electrical box. Mark where anchors meet ceiling, remove mounting bracket from ceiling, and then drill holes using 3/16" drill bit where marked (B). Install mounting bracket and attach anchors to secure bracket at ends.

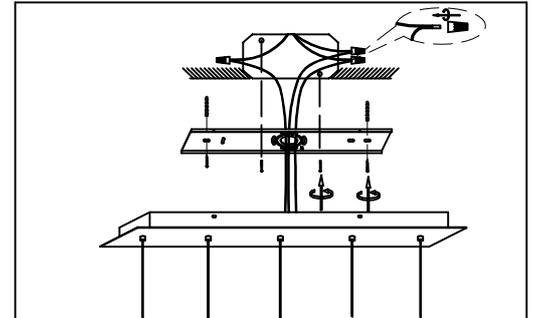

2.)


**Step.2:** Wire fixture to wires in outlet box. Green wire is for Ground.

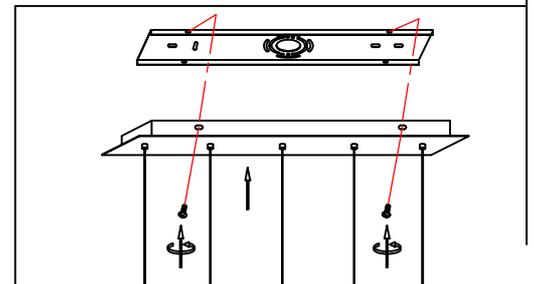

3.)

**Step.3:** Tighten screws (D) on the sides of the canopy (C) to secure the fixture.

4.)

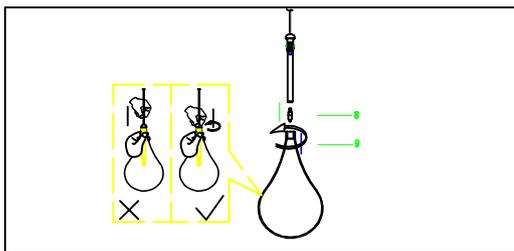

**Step.4:** Install G4 bulb (E) provided. Gently turn glass (F) onto socket (D) to secure.

**Cleaning & Care:**

Clean with soft cloth and a mild detergent. Do not use abrasive cleaner.