



Forté® | K-10269-4

Touchless single-hole lavatory faucet with Insight™ sensor technology, AC-powered, 0.5 gpm

Features

- Metal construction
- Pop-up drain with lift rod and tailpiece
- Vandal-resistant aerator
- Red and blue index rings
- Quarter-turn washerless ceramic disc valves
- 5-1/8" (130 mm) spout reach
- 2.2 gpm (8.3 lpm) maximum flow rate at 60 psi (4.14 bar)



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-04-2026 17:00 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 372
NSF/ANSI/CAN 61
DOE - Energy Policy Act 1992
NSF/ANSI/CAN 61|NSF/ANSI/CAN 372
ADA
ICC/ANSI A117.1
CSA B651

Technical Information

All product dimensions are nominal.

Handle

Handle Style/Type: Lever

Spout

Spout Reach: 5-1/8" (130 mm)

Flow Rate

Faucet Flow Rate: 2.2 gpm (8.3 l/min)

Material

- Brass valve bodies

Recommended Products/Accessories

K-23726 Drain treatment


K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



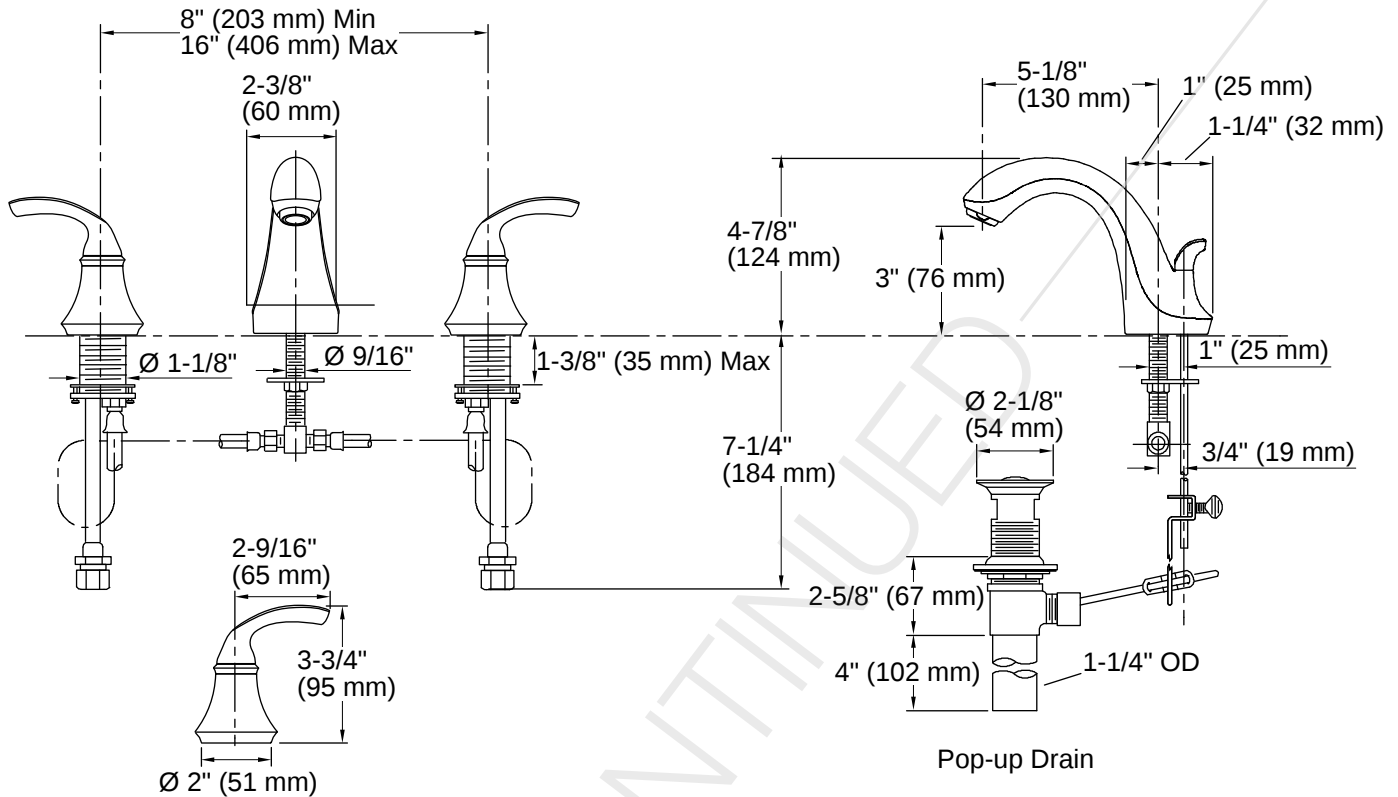

Installation

- Flexible connections for easy installation

Installation Notes

Install this product according to the installation instructions.

ADA compliant for handles only.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

8-04-2026 17:00 - US-CA