Installation Instruction

CAUTION:

• Before installing the light fixture, please make sure the power to the circuit is turned off at the main fuse box.

IMPORTANT SATETY INSTRUCTIONS:

- These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning the assembly and installation of the light fixture.
- We strongly recommend that a professional electrician install all direct wire fixtures.

PRE-ASSEMBLY:

- Remove all parts and hardware from the box along with any plastic protective packaging.
- Do not discard any contects until after assembly is complete to avoid accidentally discarding small parts or hardware.
- For your safety, it is strongly recommended that two people install the light fixture.

WARNING:

- To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior before replacing the light bulb.
- Do not touch bulb when light fixture is turned on.
- Do not look directly at a lit bulb.
- Keep flammable materials away from lit nulb.

TOOLS REQUIRED (NOT INCLUDED):

• The following installation tools are for reference only.




CARE INSTRUCTIONS:

Insulated(E)

- Wipe clean with a soft, dry cloth or static duster.
- Avoid the use of harsh chemicals or abrasive cleaners as they may cause damage the light fixture's finish.

NOTE:

- Please tum off the power switch before installation.
- It is better to have a helper to hold the lamp when it is installed.

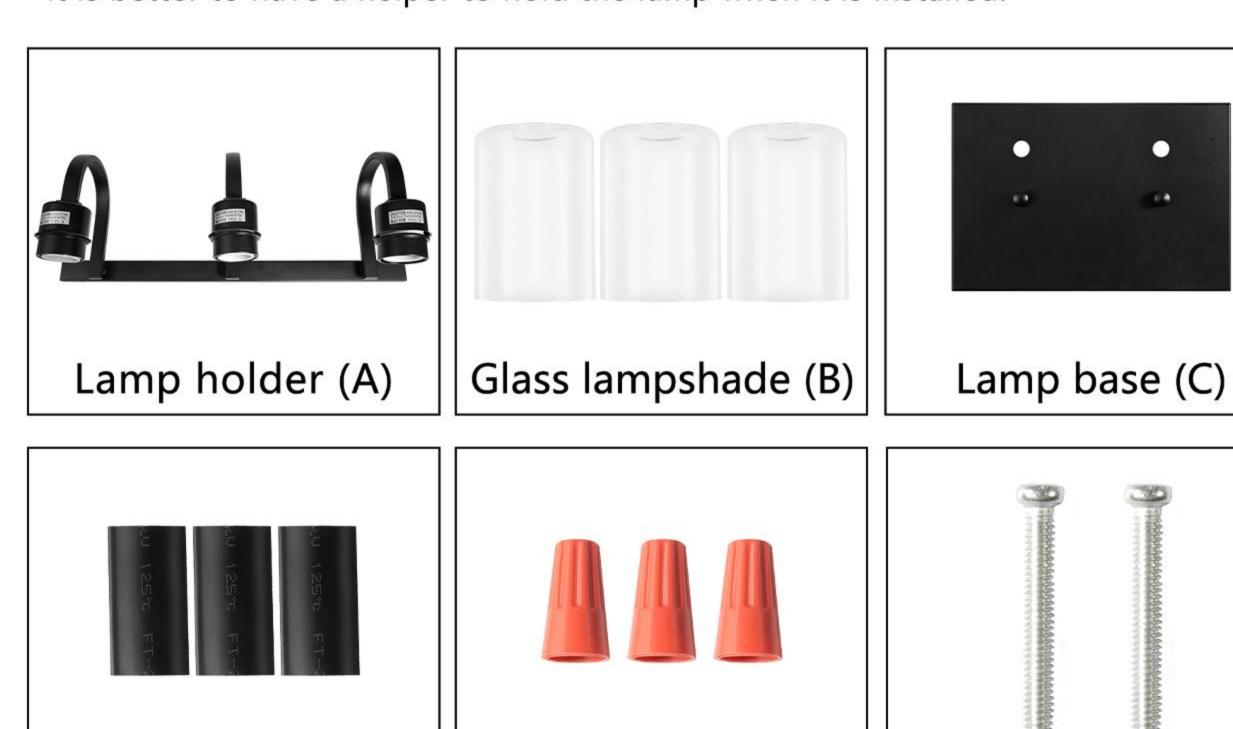

Wire nut(F)

Screw (G)



Easy to assemble the light fixtures:

Step ①: Connect the lamp body to the sconce base, and secure it by tightening the nuts.





Ground wire (D)





Step ②: Connect the glass shade to the lamp socket by fixing ring, then install E26 base light bulbs. (Bulbs Not Included)

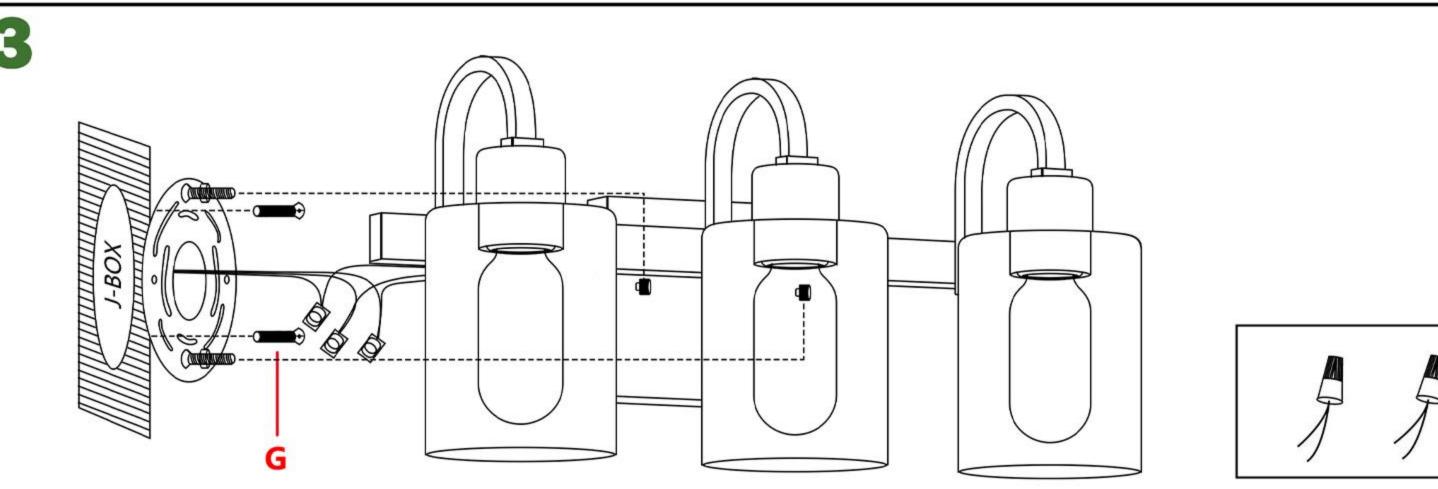



- Step ①: A. Attach the white wire from the house and 3 white wires from the light fixture.
 - B. Twist on wire nut(provided). Repeat the process to connect the black wires.
 - C. Heat the black shrink tube(provided) to contract it.
- Step ②: Attach the bare wire fromn the house to the bare wire from the light fixture, then twist on a wire nut(provided).

NOTE: If there is not ground wire in your house, attach ground wire to green grounding screw marked GND.

WARNING: It is imperative that the outlet box in your home be property grounded.

Step ③: Gently tuck the wires into the junction box through the center of mounting bracket.

Push the white and black wires apart so they won't touch each other.