



Occasion® | K-27052

Single-function handshower, 2.5 gpm

Features

- Single-function handshower delivers a full, consistent spray, regardless of water pressure
- Full Coverage with Katalyst™ air-induction technology delivers a drenching spray experience, ideal for rinsing shampoo from hair
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- Optimized sprayface for maximum performance
- Part of the Occasion bathroom faucet and accessory collection
- Requires shower hose (sold separately)



Available Colors/Finishes

Color tiles intended for reference only.

CP	Polished Chrome
SN	Vibrant Polished Nickel
AF	Vibrant French Gold
BN	Vibrant Brushed Nickel
BV	Vibrant Brushed Bronze
BL	Matte Black
2MB	Vibrant Brushed Moderne Brass
TT	Vibrant Titanium



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-30-2026 03:16 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992

Technical Information

All product dimensions are nominal.

Flow Rate

Handshower Rated Maximum 2.5 gpm (9.5 l/min)
Flow:

Material

- Premium material construction for durability and reliability
 - KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories

K-26312 32-1/8" slidebar

K-26313 40" slidebar

K-26314 32" deluxe slidebar with integrated water supply

K-23723 Faucet cleaner

K-9514 60" metal shower hose

K-26310 Wall-mount handshower holder with supply elbow
and check valve

K-8593 72" metal shower hose

K-26309 Wall-mount handshower holder

Technology

- Katalyst® air-induction technology infuses water with air,
creating bigger drops for a more powerful spray
-


Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-30-2026 03:16 - US-CA

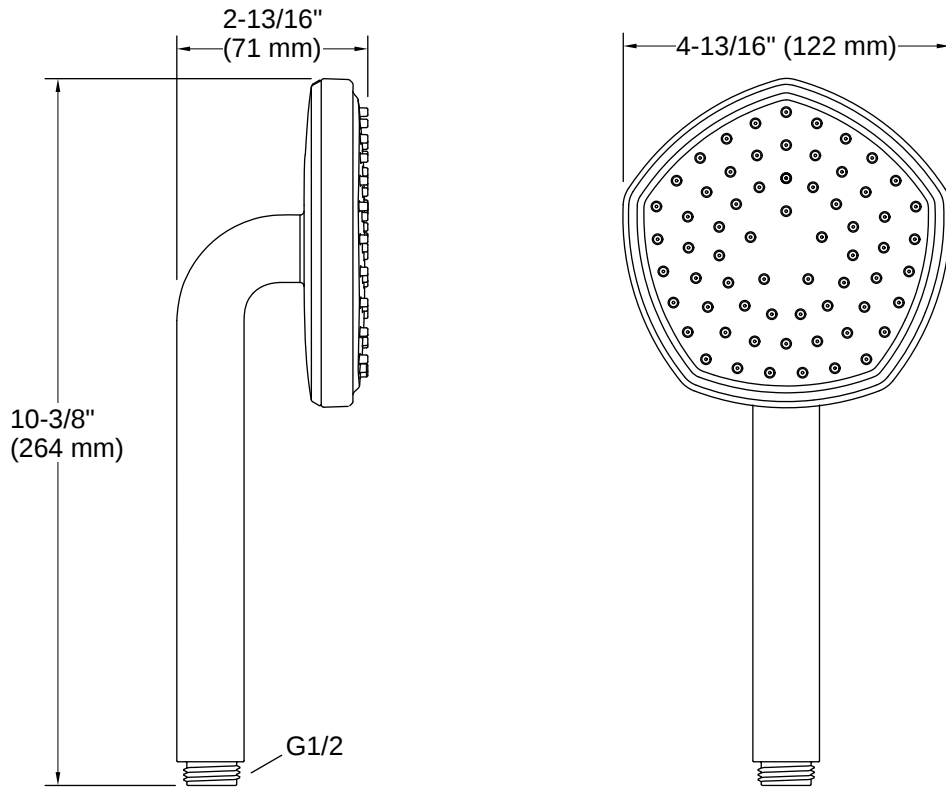

Installation

- G 1/2 inlet and outlet
- Bracket or slidebar required for wall-mount installation
- Deck-mount holder required for deck-mount installation

Installation Notes

Install this product according to the installation instructions.

For use with automatic compensating valves rated at 2.5 gal/min (9.5 l/min) or less.

