



# 7242 | K-1131

72" x 42" drop-in whirlpool bath

## Features

- Single-speed whirlpool offers performance and value, with six fully adjustable jets
- Hydromassage flow and direction can be controlled at each jet
- Spacious design accommodates up to two bathers
- Integral lumbar support and armrests offer extra comfort while bathing



DISCONTINUED



## Codes/Standards

ASME A112.19.7/CSA B45.10  
CSA B45.5/IAPMO Z124  
UL 1795  
UL Listed

## Technical Information

*All product dimensions are nominal.*

|                        |                                                   |
|------------------------|---------------------------------------------------|
| Drain Location:        | Reversible                                        |
| Minimum Flat for Door: | 2-11/16" (69 mm)                                  |
| Basin Area, Bottom:    | 53" x 26" (1346 mm x 660 mm)                      |
| Basin Area, Top:       | 65" x 34" (1651 mm x 864 mm)                      |
| Water Depth:           | 15" (381 mm)                                      |
| Water Capacity:        | 78 gal (295.3 L)                                  |
| Minimum Floor Load:    | 36 lbs/ft <sup>2</sup>                            |
| Weight:                | 70 lbs (31.8 kg)                                  |
| Cutout:                | Drop-in, 70-1/2" x 40-1/2"<br>(1791 mm x 1029 mm) |

## Material

- Acrylic

## Recommended Products/Accessories

K-1491 Bath/whirlpool pillow, removable  
K-1601 Bath/whirlpool footstop, removable  
K-23726 Drain treatment  
K-23732 Tub & shower cleaner  
K-7213 Cable bath drain with PVC tubing  
K-7214 Cable bath drain, less PVC tubing  
K-7259 Brass toe tap bath drain  
K-7265 Brass toe tap bath drain

## Required Products/Accessories

- K-T37392 Rotary-turn bath drain trim
  - K-T37391 Rotary-turn bath drain trim
- or
- K-78438 30" cable bath drain
  - K-37383 Rough-in cable bath drain, PVC, 30" cable with tubing
- or
- K-78439 45" cable bath drain
  - K-37385 Rough-in cable drain, PVC, 45" cable, less horizontal tube

## Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Pump: 120 V, 15 A, 60 Hz

## Electrical Component Ratings

Pump: 120 V, 7.5 A, 60 Hz


Number of Speeds: Single

## Warranty

*See website for detailed warranty information.*

KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty|KOHLER® Hydrotherapy Components Five-Year Limited Warranty



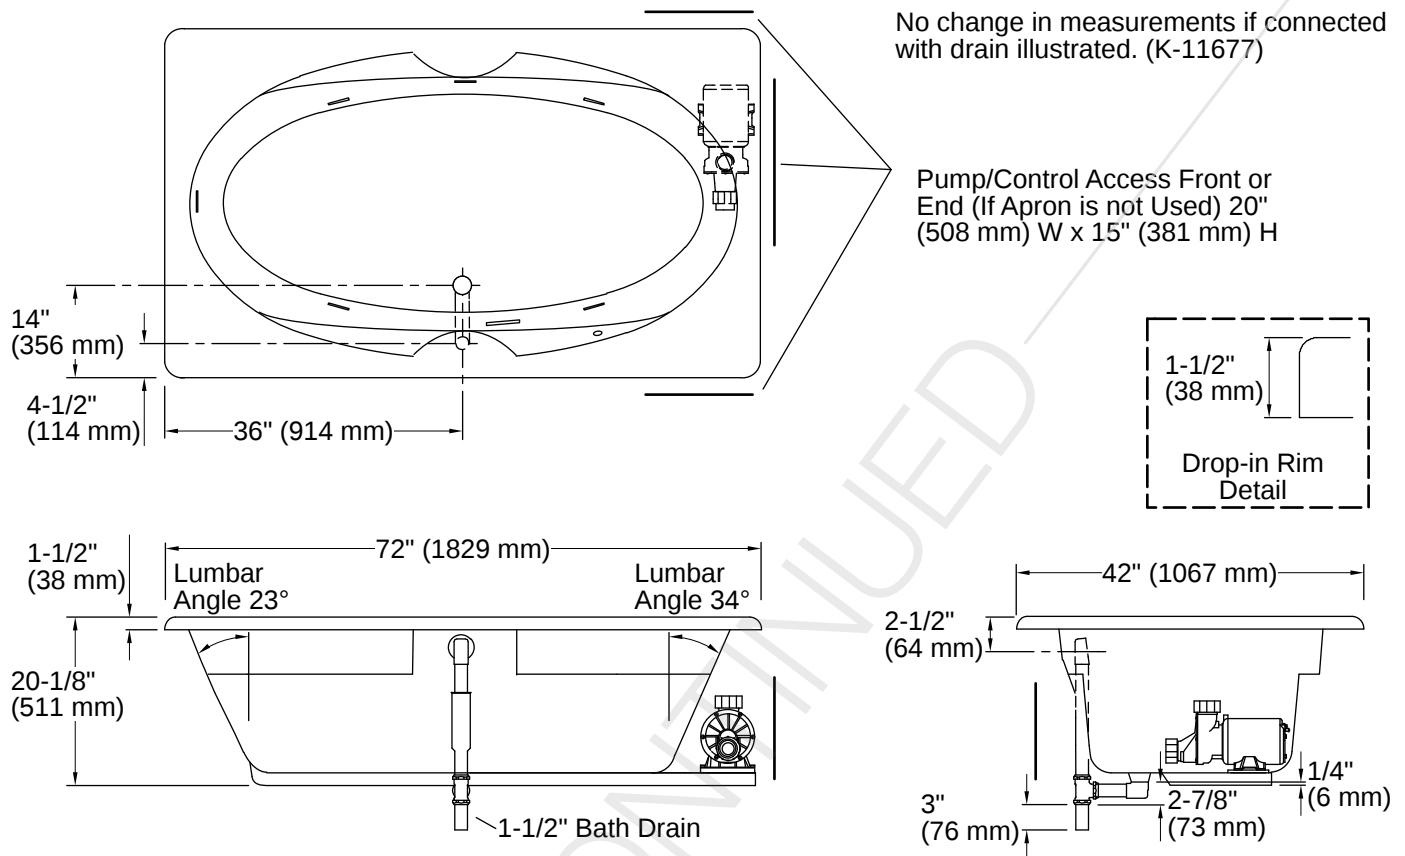

## Installation

- Reversible drain
- Drop-in

## Installation Notes

*Install this product according to the installation instructions.*

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

