


Assembly & Installation Instructions

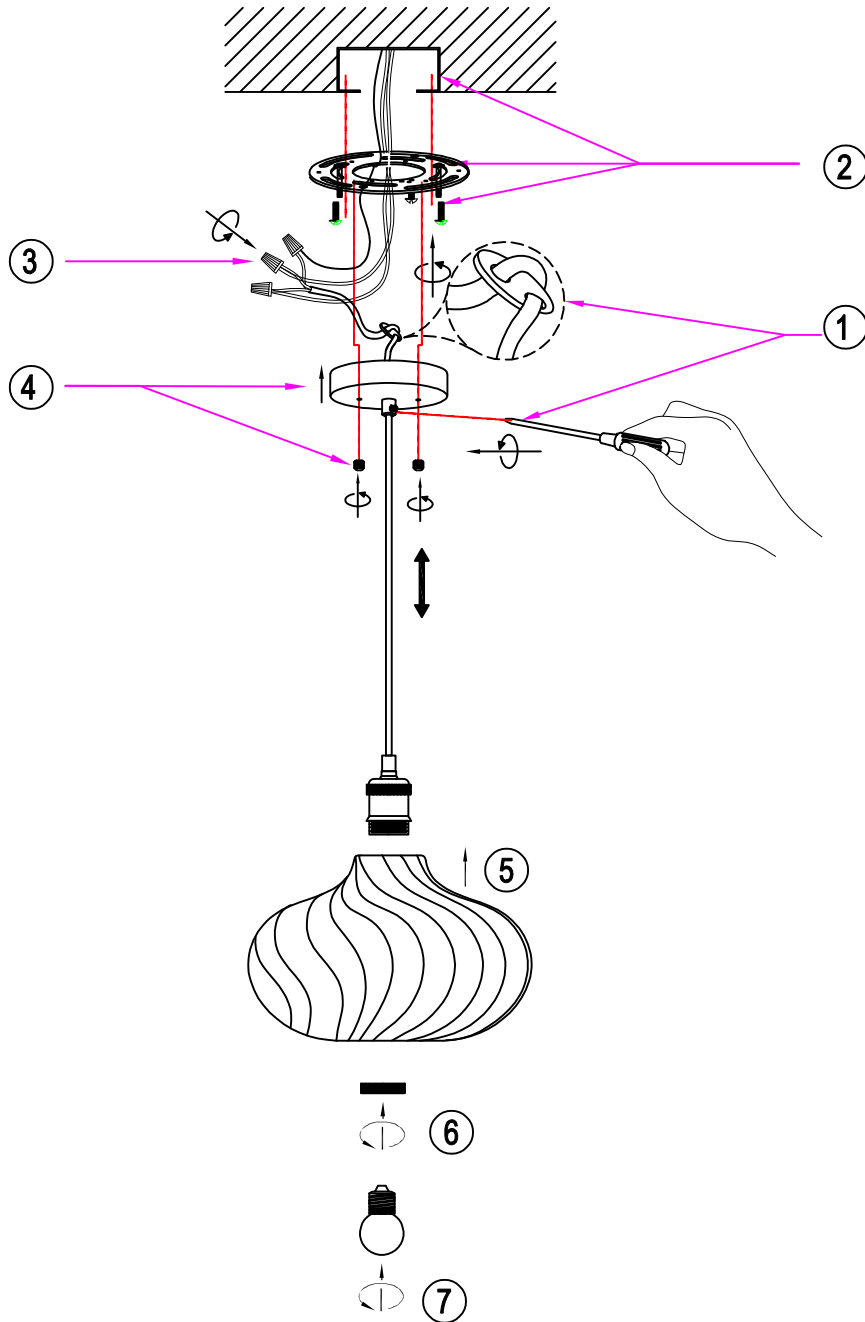

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. **WARNING** - Disconnect power before relamping or wiring the fixture. Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

Step 1: Adjust Suspension Cable

Loosen the screws on the metal parts, adjust the suspension cable to the desired length, then retighten the screws to secure the cable. Finally, position the two-hole looping cord grip at the bottom inside the canopy to prevent the cable from being pulled.

Step 2: Mount Bracket

Secure the mounting bracket to the U.S. standard junction box using the screws.

Step 3: Connect Wires

Connect the fixture wires to the pre-installed wires in the junction box using wire connectors:

- Live(Black or mark"L") to Live(Black or mark"L");
- Neutral(White or mark"N") to Neutral(White or mark"N");

Ground to Ground via the green grounding screw on the mounting bracket.

Caution: Ensure no wires are exposed during the wiring.

Step 4: Attach Ceiling Canopy

Cover the mounting bracket with the ceiling canopy and secure it using the decorative nuts.

Steps 5-6: Attach Lampshade

Align the center hole of the lampshade with the socket, then tighten and secure it using the socket ring.

Step 7: Install Bulb

Install the bulb (bulb not included).

Installation is complete