

## TROUBLESHOOTING

1. If sparks are found, please turn off the electricity and check if all wires are installed properly.
2. Check connections between supply wires and fixture wire. Remove wire nut and secure it back.
3. If fixture does not light up, disassemble the connector between the transformer and fixture wires. Re-install it to ensure the connection is secure.

## WARRANTY INFORMATION

We warrants this lighting fixture,  
5-Light LED Black Vanity Light,  
to be free from defects in materials and  
workmanship from a period of one (1) year  
from date of purchase. If this product is found  
to be defective within one year of purchase,  
you may contact us to receive a fastest solution.

## DISCLAIMER

We will not be responsible for any damages  
and/or injuries subjected to properties or  
humans during the installation of the lighting  
fixture. Hire an electrician if you do not feel  
safe to do so.


## USE & CARE GUIDE

5-Light Loop Ring Bathroom Vanity Light

PARTS INCLUDED

Description	Qty	Part
Circle Cross Bar Mounting Plate	1	AA
Outlet Box Screw	2	BB
Mounting Screw	2	CC
Wire Nut	2	DD

TOOLS REQUIRED

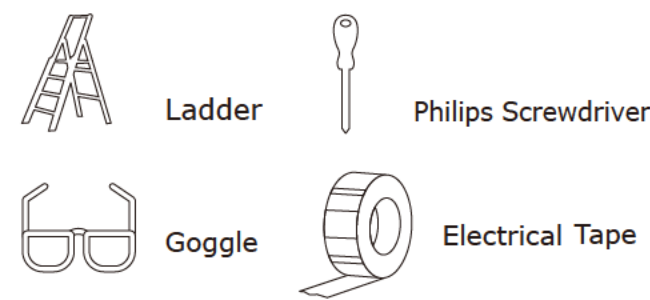

SPECIFICATION

Voltage	:100V - 265 VAC
Frequency	:60Hz
Wattage	:30W
Color Temperature	:3000K
Brightness	:2500Lm


Dry, Damp or Wet Location Listed:
Dry & Damp

INSTALLATION




WARNING!


PLEASE TURN OFF / DISCONNECT ALL NECESSARY ELECTRICITY PRIOR TO THE INSTALLATION.




1.Unscrew the circle cross bar mounting plate (AA) from both sides of the lamp base. Set aside both mounting screws (CC) for later use.




2.Unscrew the ground wire from the circle cross bar mounting plate (AA).




3.Align the mounting plate (AA) with your existing wall outlet box and the lamp base.




4.Pull the wires out from the electrical box and mount the circle cross bar (AA) using the outlet box screws (BB). Screw in the mounting plate (AA).



5.Hold the fixture body. Connect the black supply wire to the black fixture wire using a wire nut (DD). Connect the white supply wire to the white fixture wire using a wire nut (DD).



6.Re-attach the ground wire to the circle cross bar mounting plate (AA). Secure the ground wire connection with a spacer and hexagon nut.



7.Attach the fixture to the mounting plate (AA) by using two mounting screws.

