


Assembly & Installation Instructions

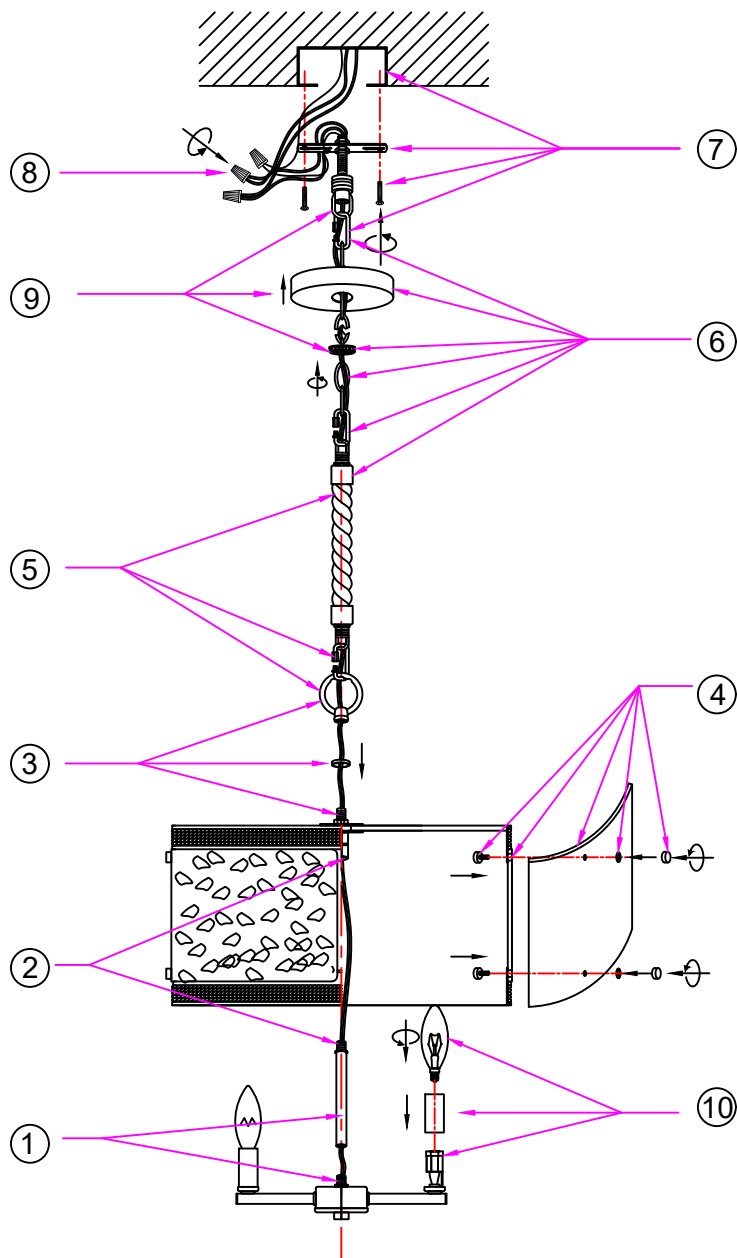

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. **WARNING** - Disconnect power before relamping or wiring the fixture. Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1. Screw the central rod onto the lamp holder's threaded tube.
2. Thread the power cord through the swivel joint, then twist the light fixture's central tube onto the swivel joint.
3. Thread the power cord through the pipe cap and suspension ring, then secure the pipe cap over the threaded tube and fasten the suspension ring.
4. Pass the threaded rod through the hole of the light frame, then thread it through the holes of the glass sheet, put the rubber gasket onto the threaded rod, and finally tighten it with the decorative nut.
5. Thread the power cord through the hemp rope suspension rod, then connect two suspension rings with the swivel buckle.
6. Loosen the swivel buckle to adjust the height of the suspension chain and the wire, then thread the power cord through the suspension chain, knurled ring and ceiling plate.
7. Secure the mounting bracket to a U.S.-standard junction box with mounting screws, then attach and tighten the swivel buckle to the threaded nipple, last thread the power cord through the threaded nipple assembly.
8. Connect the wires using wire connectors as follows:
Connect the BLACK wire of the main wire to the LIVE wire.
Connect the WHITE wire to the NEUTRAL wire.
Secure the fixture GROUND wire and external ground wire.
Pay attention that the bare wire can not be exposed to prevent leakage of electricity.
9. Secure the ceiling plate to the mounting bracket with the knurled ring.
10. Put the lamp holder sleeve onto the lamp holder and install the bulb (NOT included) as indicated.
11. Turn on the light to test for proper operation.