

Features

- 25+ artisan finishes including 10+ PVD finishes
- All brass construction
- Insulated to reduce heat to faucet
- Max flow rate: 1.0 gpm (3.8 L/min)
- Self-Closing handle
- Compatible with RO filter units
- Requires Hot Water Tank (9628SS) sold separately

Codes/Standards Applicable


Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC, & DOE
- Commonwealth of MA
- ADA compliant








9625-K30-KL shown

9625-K30-FL
9625-K30-KL
9625-K30-SL
9625-K30-TL

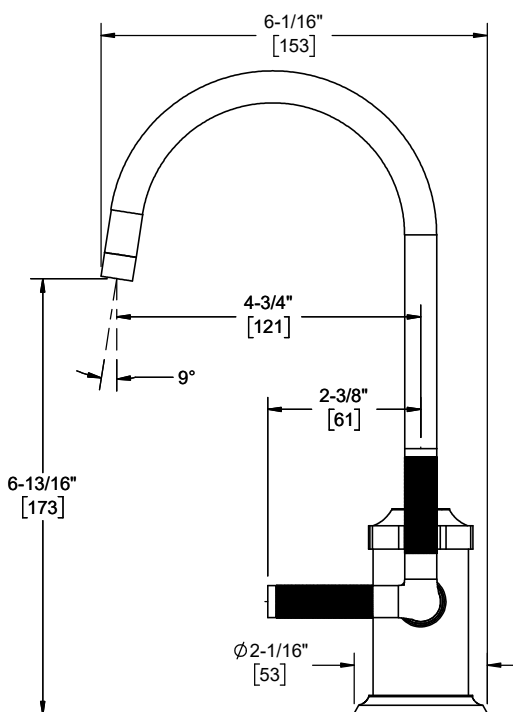

Through-Hole Specifications

Min	Recommended	Max
Ø 1-1/4" [32]	Ø 1-3/8" [35]	Ø 1-1/2" [38]

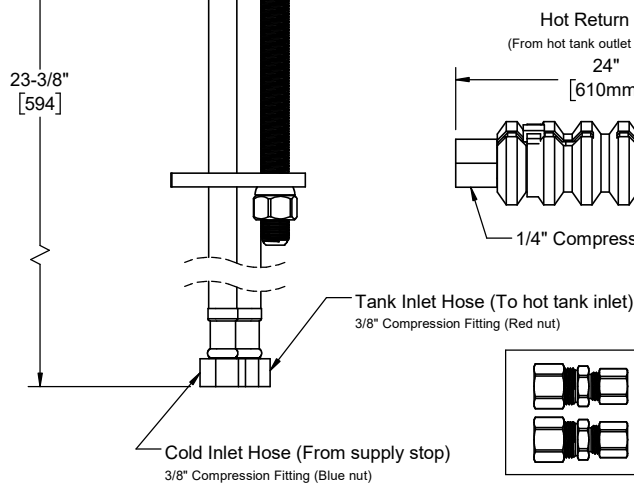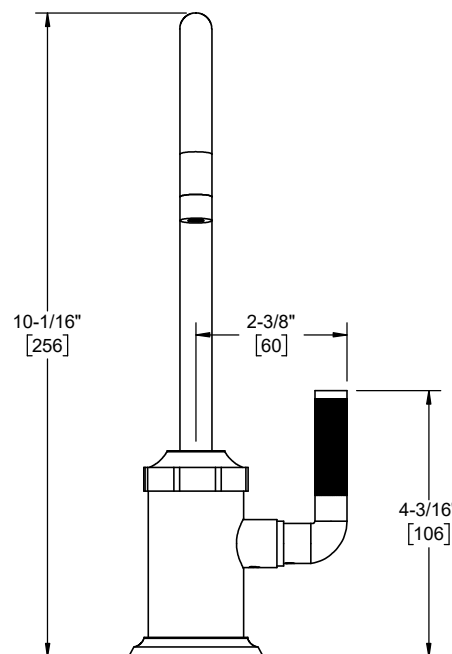

Couplings are to be used on hot tank
1 @ 1/4" Tank outlet to hot return hose
1 @ 3/8" Tank inlet to tank inlet hose



Supply line flow restrictor
for 3/8" compression fitting
9/16"-24 male x female