
## TRIAIRE™ CUSTOM

# MAD8514\*\* Ceiling Fan



BLW

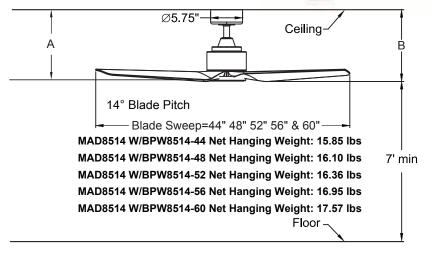

DZW	Dark Bronze
GRW	Matte Greige
MWW	Matte White
SLW	Silver

Black

Available Finishes

### **INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

### **ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

## **MOTOR SPECS:**

DC-158 x 22MM sensorless DC motor is designed for optimal performance with this fan.

#### BI ADES

3 bladed blade sets are available in plastic materials— all sold separately. See our catalog or visit www.fanimation.com for blade options.

## **CONTROL OPTIONS:**

TR205D hand-held remote control is included. Push button remote control with variable fan speeds, fresh air, reverse, infinite light levels, fan/light timer, home away, safe exit and off button. Optional TW206D wall control and WFR8514 WiFi receiver are available— sold separately. Instructions are provided with each control.

IGHTING	$\triangle$ DT	
	CHI	

LK8514- One 18-watt dimmable LED.

	Α	В
Fan w/4.5" downrod	12.42"	12.92"
Fan w/12" downrod	19.92"	20.42"
Fan w/18" downrod	25.92"	26.42"
Fan w/24" downrod	31.92"	32.42"
Fan w/36" downrod	43.92"	44.42"
Fan w/48" downrod	55.92"	56.42"
Fan w/60" downrod	67.92"	68.42"
Fan w/72" downrod	79.92"	80.42"

Airflow / Energy Efficiency Info					
Energy Sta	Energy Star test with BPW8514-60 Blade in 60" sweep			sweep	
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	161	6765	230	0.42	29
Med	98	4222	503	0.13	8
Low	28	821	357	0.04	2

Energy Guide FTC Measured with BPW8514-60 Blades in 60" sweep			
Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
20	4860	6	247

## **DOWNROD OPTIONS:**

Fan comes with a 1" dia. x 4.5" long downrod (DR1SS-4.5). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". The fan can be mounted on a sloped ceiling up to 27°. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

#### **LOCATION USE:**

Fan is rated for dry, damp and wet locations.