

Basin Frame Installation

1 Parts supplied basin stand

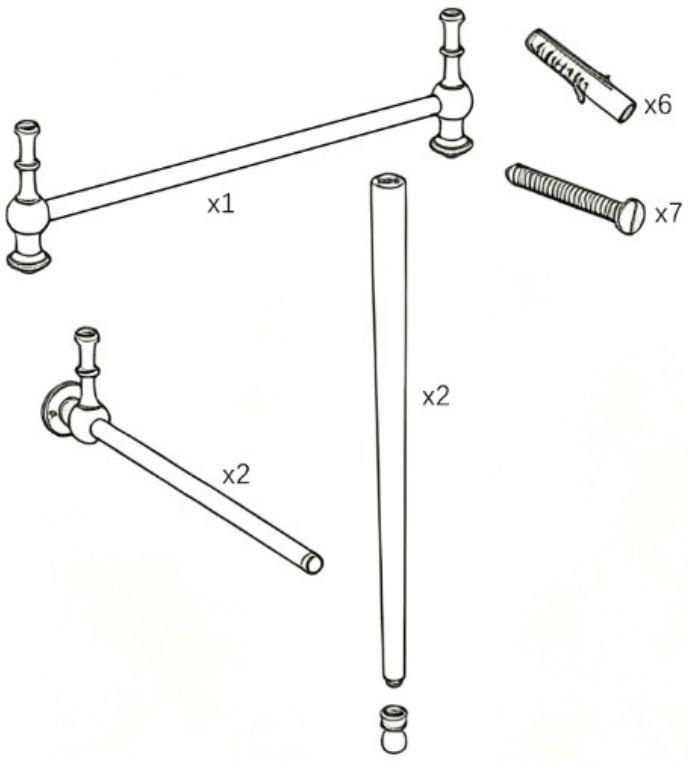

2 Attach the two horizontal rails to the front rail.

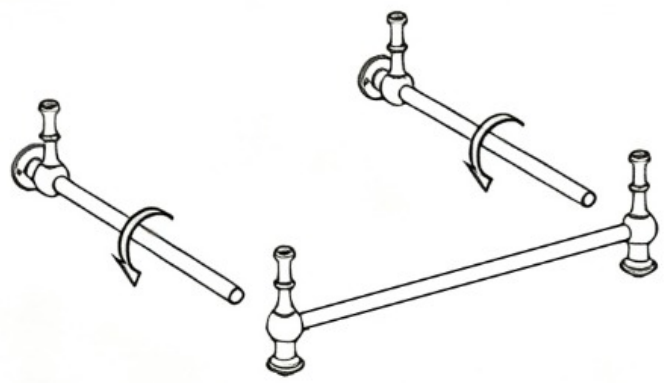


3 Attach bothfeetto thelegs.




4 Screwthelegs into therall


NOTE: at this stage, if you are using the regal designer basin stand extension kit (T62), then refer to step 5 and then proceed to step 6.

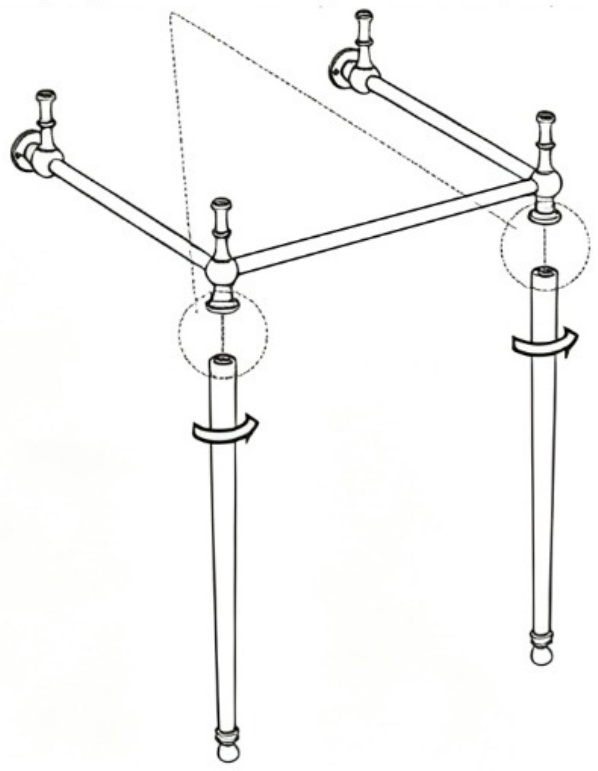

5 Check that the horizontal bracket bar is vertical using a spirit level

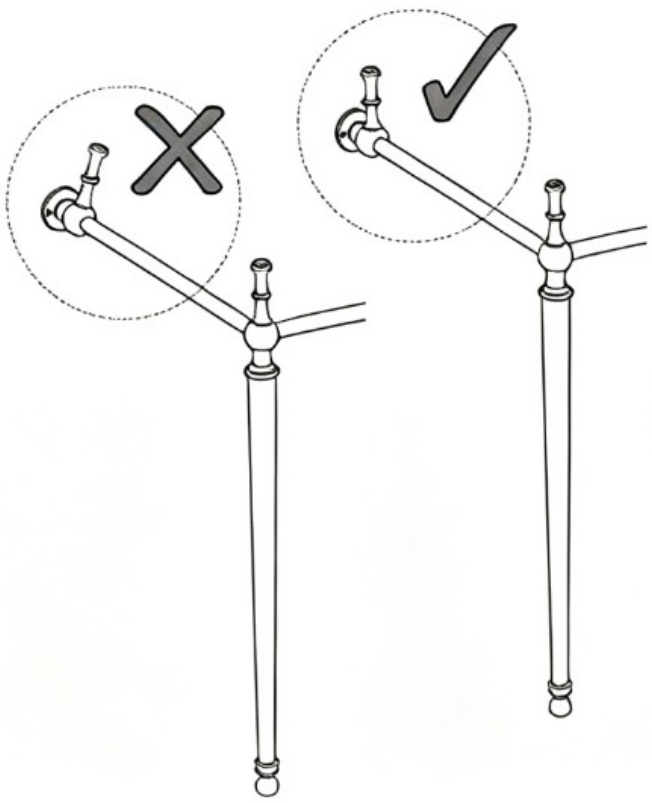


6 Determine the final installation position and mark the 4 wall and two floor fixing hole position in pencil. Please make sure to include the floor nipples (and washers if necessary) when deter -mine the installation position because the stand may elevate after the floor nipples are fitted.

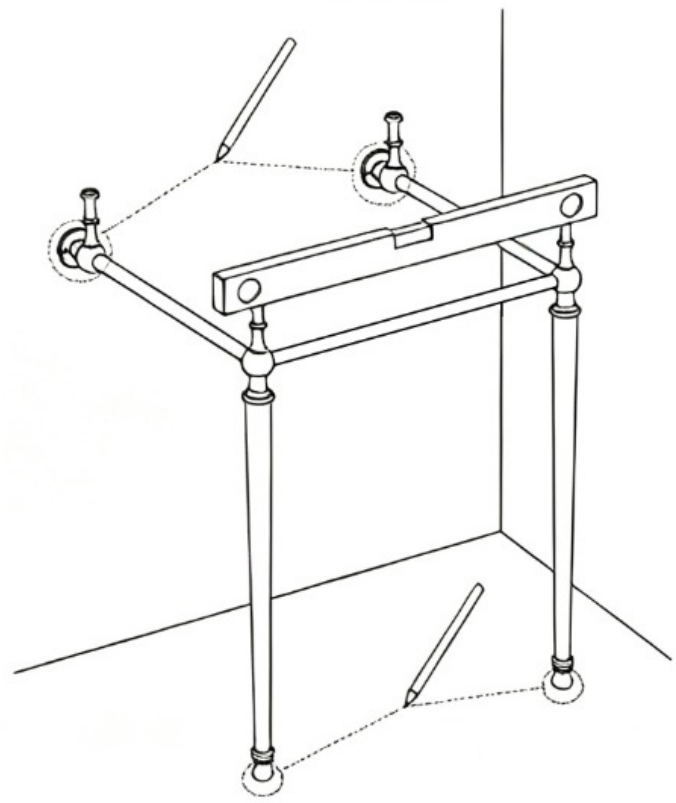


7 Using a ¼" drill bit drill the six holes on the marked positions.

Note: In the event that the wall /floor fixings supplied beingi nappropriate for the wall /floor, please source alternatives.
Check for pipes and cables before drilling.

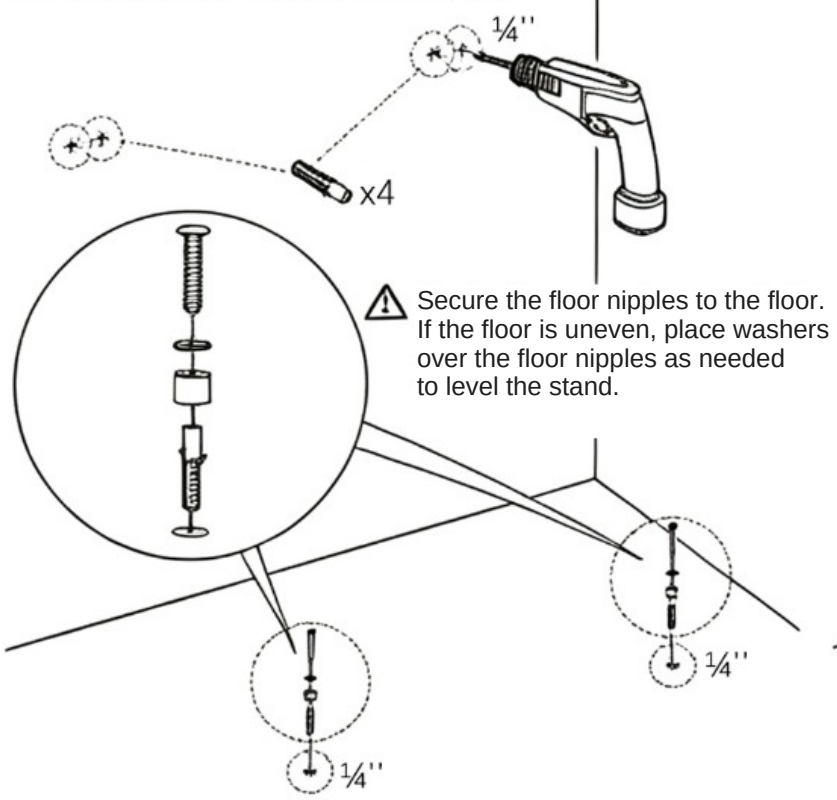


8 Fit the two legs over the floor nipples.

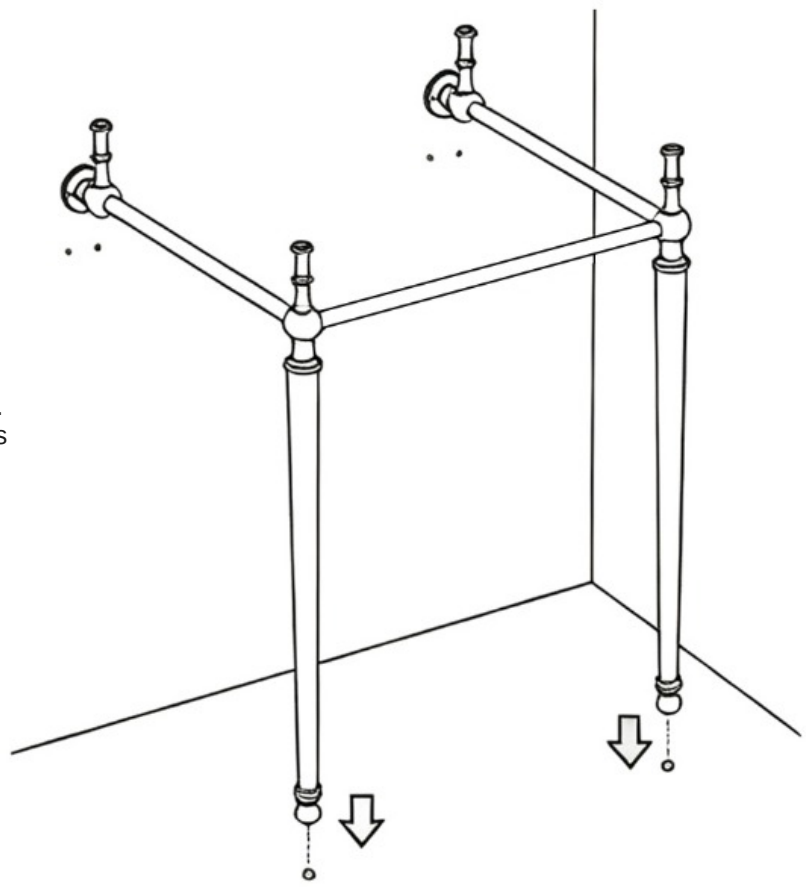


9 Fix each of the two brackets onto the wall using the 4 screws provided. Ensure that the screw heads are parallel to the floor. Place the 4 rubber washers into the 4 recesses as shown.

The 4 rubber washers are not recommended to use when installing the marble basin onto the stand.

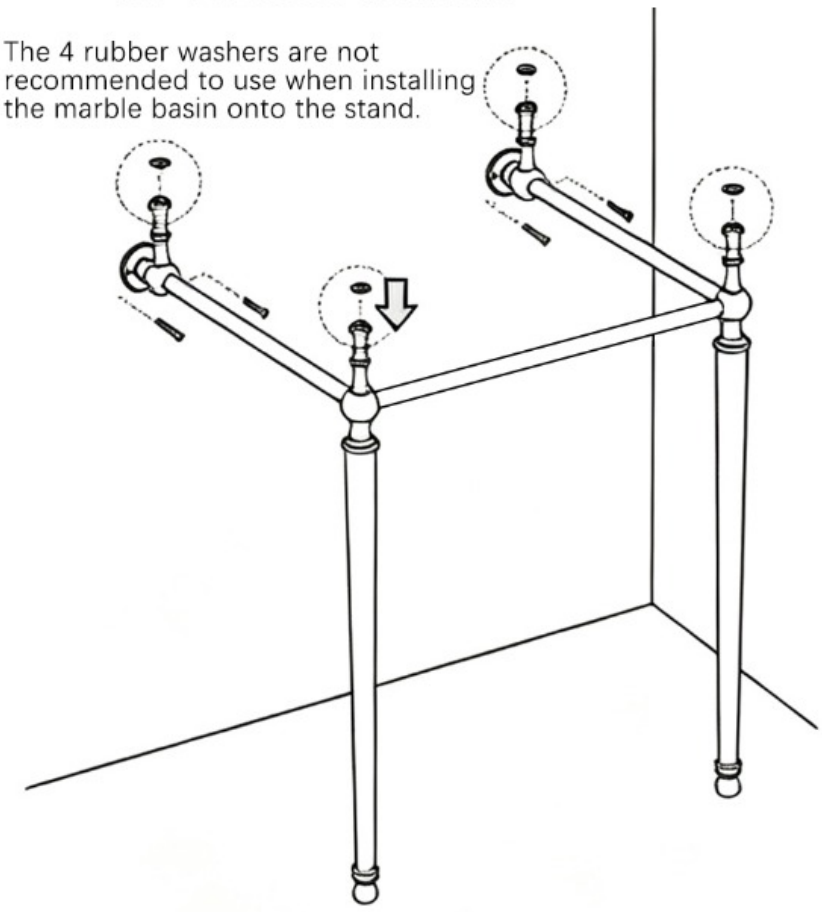

10 For ceramic basin, place the basin in position ensuring that itis level. The basin must be fixed to the wall at the rear using appropriate wall fixing screws. (Not supplied the basin fixing)

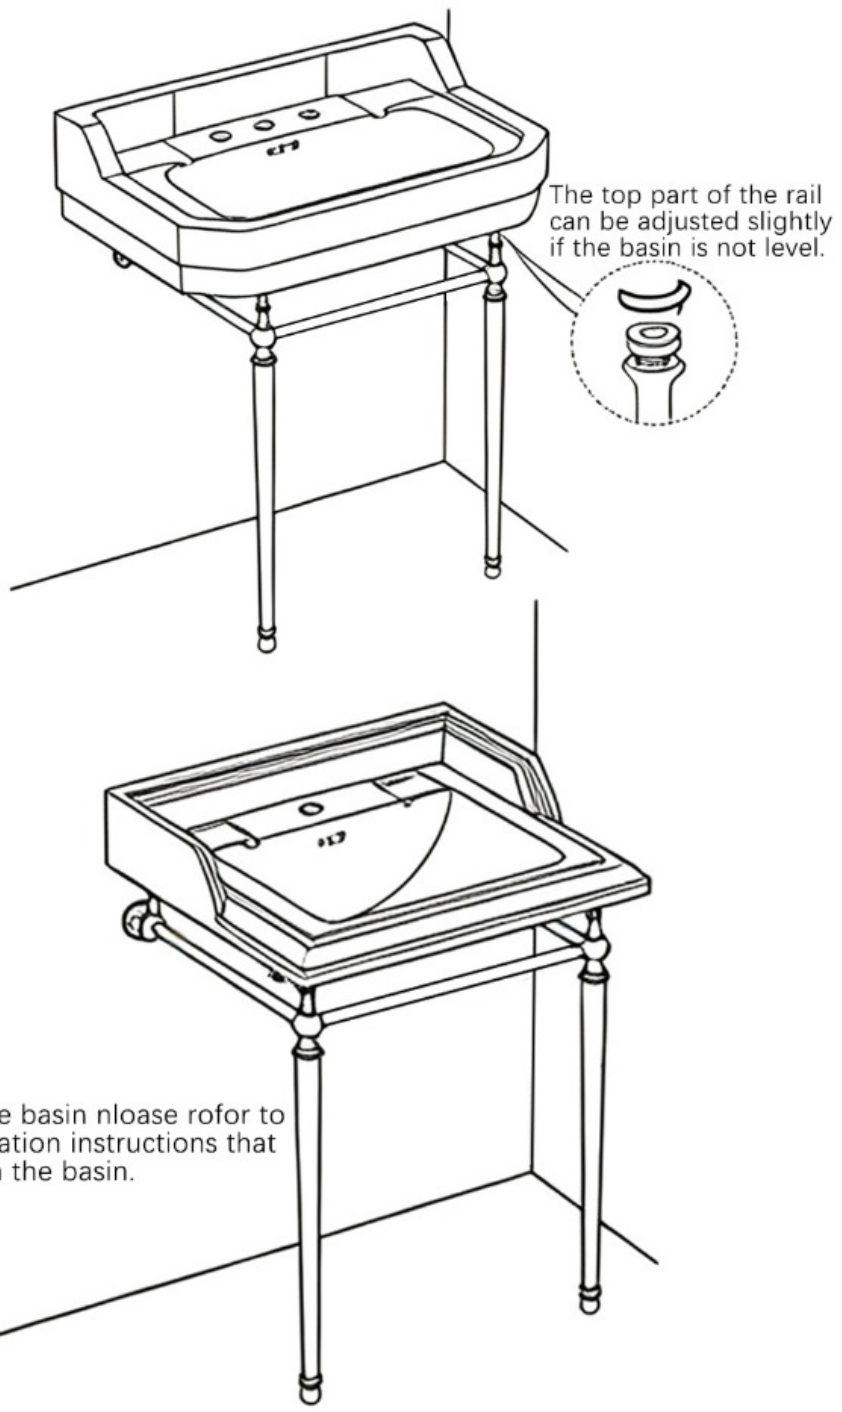

For marble basin nloase rofor to the installation instructions that came with the basin.