


Features

- Acrylic
- Variable speed pump with 1.5 kW heater, back-lit user keypad and remote control
- 6 Flexjets™
- Ten color-matched sequencing Bodyssage™ backjets
- Two pulsating neckjets with pillow
- 8 effervescent ports
- 4 chromatherapy lights
- 240 V, 20 A electrical service
- Color-matched jet trim included
- Coordinating Memoirs® Suite
- Drilled for K-9653 grab bars (required)
- 72" (1829 mm) x 42" (1067 mm) x 22" (559 mm)

6' EXPERIENCE BATH WHIRLPOOL WITH SPA/MASSAGE PACKAGE K-1418-V

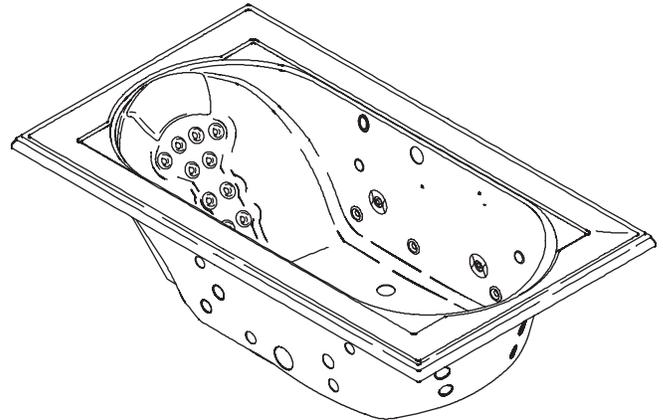

Codes/Standards Applicable

Specified model meets or exceeds the following:

- IAPMO/UPC
- ASTM E162
- ASTM E662
- CSA B45.5/IAPMO Z124
- ASME A112.19.7

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes		
K-1418-V	6' Experience bath whirlpool with Spa/Massage Package	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
Required Accessories				
K-9653	Grab bars (pair)	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Recommended Accessories				
K-7161-AF	Pop-up bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Optional Accessories				
K-1601	Footstop	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	

Product Specification

The acrylic bath whirlpool shall be 72" (1829 mm) in length, 42" (1067 mm) in width, and 22" (559 mm) in height. Product shall have 6 Flexjets, 8 effervescence ports, and 4 chromatherapy lights. Product shall have a variable speed pump, 1.5 kW heater, back-lit user keypad and remote control. Product shall have 10 color-matched sequencing Bodyssage backjets and 2 pulsating neckjets with pillow. Product shall be drilled for K-9653 grab bars (required) and UL listed. Product shall coordinate with Memoirs® Suite. Bath whirlpool shall be Kohler Model K-1418-V-_____.

MEMOIRS®

Technical Information

Fixture*:	
Basin area:	
Bathing area, bottom	42" (1067 mm) x 27" (686 mm)
Bathing area, top	60" (1524 mm) x 30" (762 mm)
Weight	140 lbs (64 kg)
To overflow:	
Water depth	16" (406 mm)
Capacity	86 gal (326 L)
* Approximate measurements for comparison only.	

Pump:	kW	V	A*
	1.5	240	15
* Approximate measurements for comparison only.			

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)	
Drop-in cut-out	70-1/2" (1791 mm) x 40-1/2" (1029 mm)

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):

Pump/control	208-240 V, 20 A, 50/60 Hz
--------------	---------------------------

Installation Notes


Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 44 lbs/square foot (214 kg/square meter) loading.

Hot water supply should be 70% of capacity or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference with drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

This whirlpool is designed for drop-in installation only. It is not suited for use in a three wall alcove with an overhead shower.

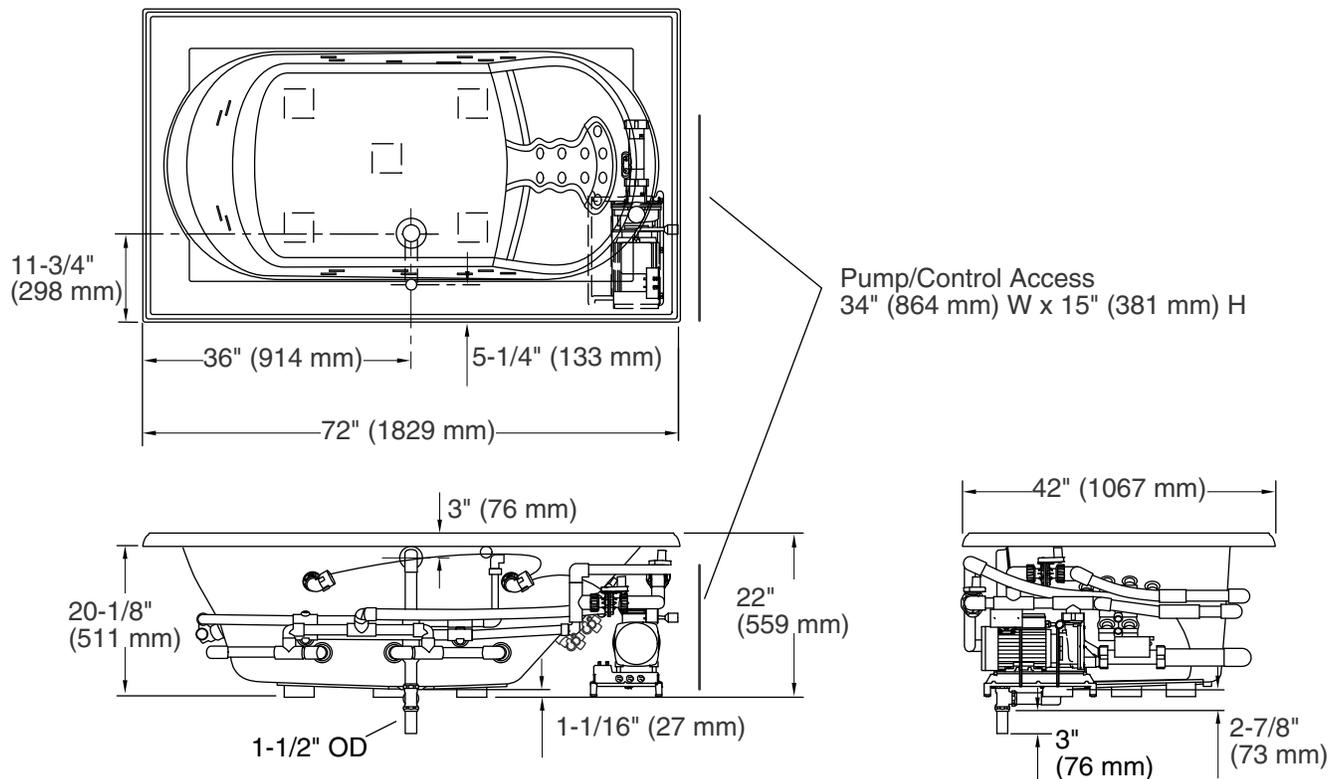

Product Diagram