

Modern Glam Brass Round Chandelier

Caution: Please turn off power before installation and read the manual carefully, we advise you contact professional electricians to install for safety purpose.

Product Features

Style: Modern /Contemporary

Material: Metal/Glass

Color: Brass

Base Type: E12

Light Source Included: No

Voltage: 110V AC



Wattage: 60W Max

Package includes


1 x Chandelier Light

1 x Accessories Kit


1 x User's Manual

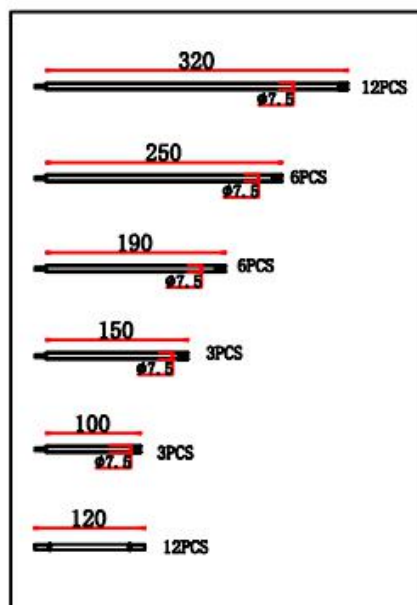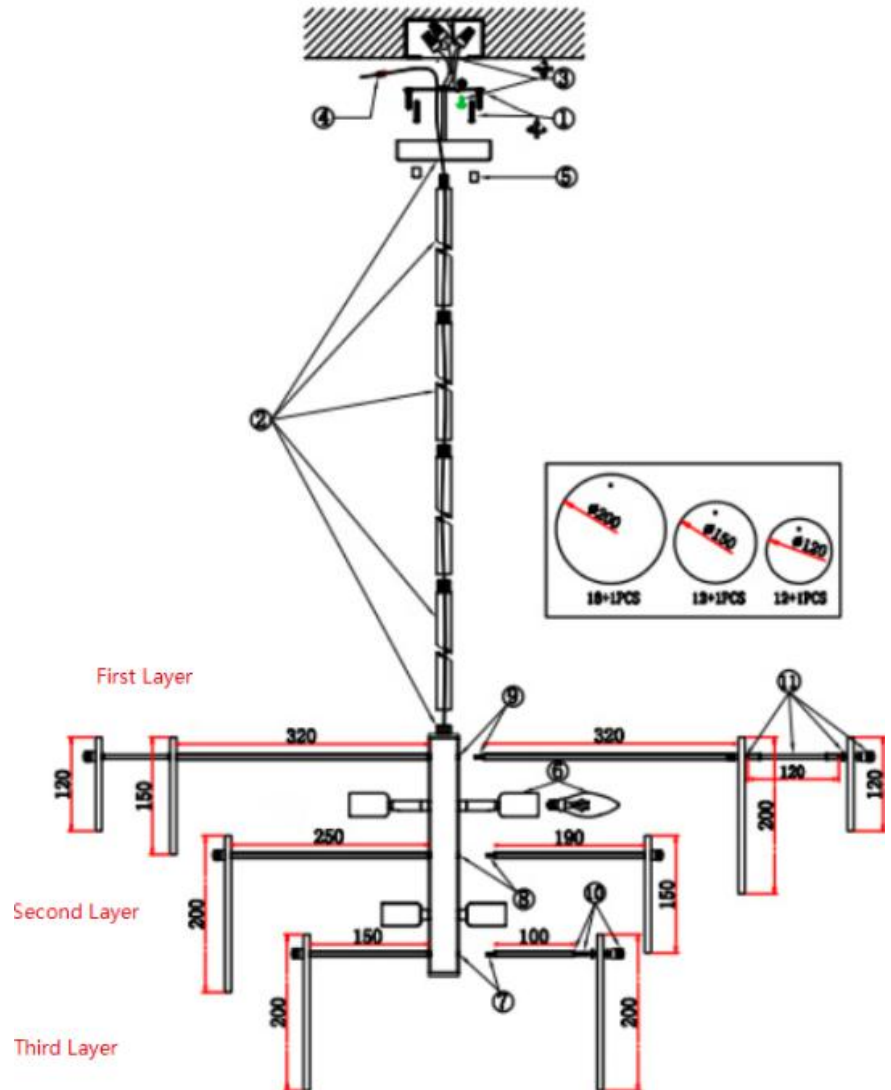


First Layer Overlook

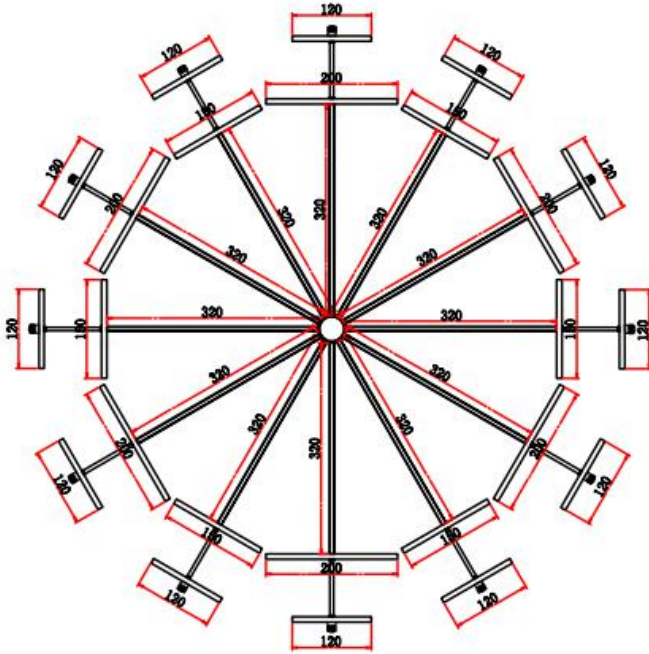

Second Layer Overlook

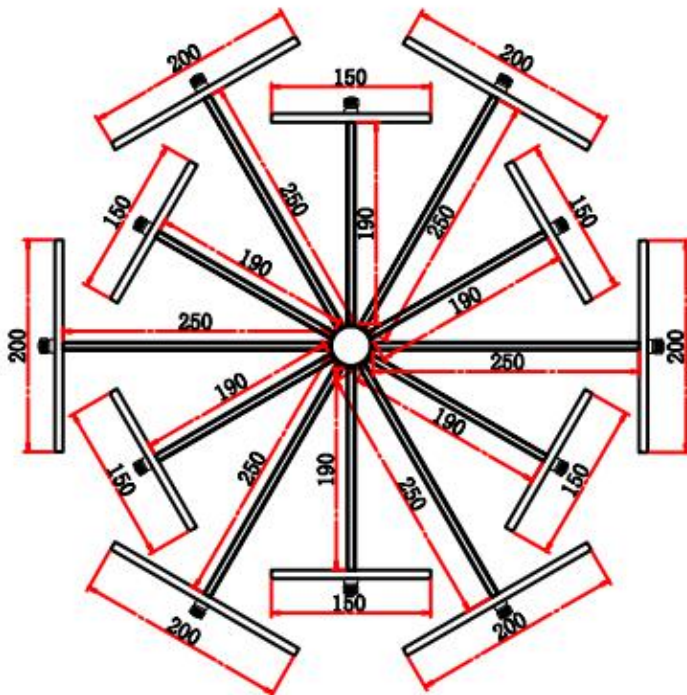

Third Layer Overlook

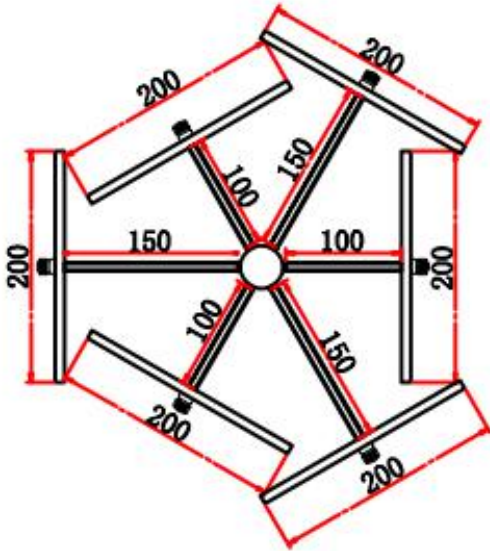

Installation Instructions

1. Fasten the ceiling plate into the junction box and secure the ground wire.
2. Pass the wire and steel wires through the hanging rod, you could decide the numbers of rods need according to your ideal hanging height. And fix the ceiling plate then.
3. Connect the wires from the fixture with the wires reserved on the junction box, live wires (black color) and neutral wire (white color), fix them with the cap. There should be no exposed wires. Wrap them with insulating tape and carefully insert the wires into the junction box.
4. Use the wire lock to fix the steel wire and put it into the junction box.
5. Align the holes of the rectangular mounting plate and install it on the ceiling & twist the branches iron parts.
6. Place the E12 base light bulb (not included).
7. Begin to install the threads, start from the third layer, use the thread (Size 7.5*100mm) and thread (Size 7.5*150mm), twist and tighten these two threads respectively.
8. Second Layer uses 7.5*190mm long thread and 7.5*250mm long thread, tighten these two threads respectively.
9. First Layer use the 7.5*320mm long thread.
10. For the second layer and third layer, Place the glass piece on the end of each thread, put rubber washers on both sides of the glass piece, and twist it to the branches. On each layer, for the size information of the glass pieces and threads needed, please refer to the instruction manual for more details.
11. For the first layer: Put the glass piece the end of the 320MM long thread and add the 120 MM long thread to fix it, then put the another glass piece and add washer and then twist it to the branches; the size of the glass piece needed for each position, kindly refer to the instruction manual.

Note: please use this product accordingly to its intended purpose, do not retrofit or remodeling the product. The warranty does not cover if the failure is caused by the third party product, or natural disasters.