


# Installation & Assembly

**WARNING (To reduce the risk of fire, electric shock, or personal injury):**






1. We suggest installation by a **licensed electrician**.
2. Please read the instruction carefully and save it as you may need it at a later time.
3. Before you start, **NEVER** attempt any work without shutting off the electricity until the work is done.
  - » Go to the main fuse, or circuit breaker, box in your home.  
Place the main power switch in the “**OFF**” position.
  - » Place the wall switch in the “**OFF**” position.
4. Mounting surface should be clean, dry, flat, strong enough and 1/4” larger than the canopy on all sides. Any gaps between the mounting surface and canopy exceeding 3/16” should be corrected as required.
5. Make sure that the ceiling or wall can stand the weight of the lamp before installation.
6. Make sure the voltage you are using is **120V**. The maximum wattage is **Type G, Max 40W** per bulb.
7. Keep the lamp away from acidic and alkaline substances in case of damaging the surface of the lamp.
8. When replacing bulbs, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
9. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.

**IMAGE FOR FINISHED PRODUCT:**

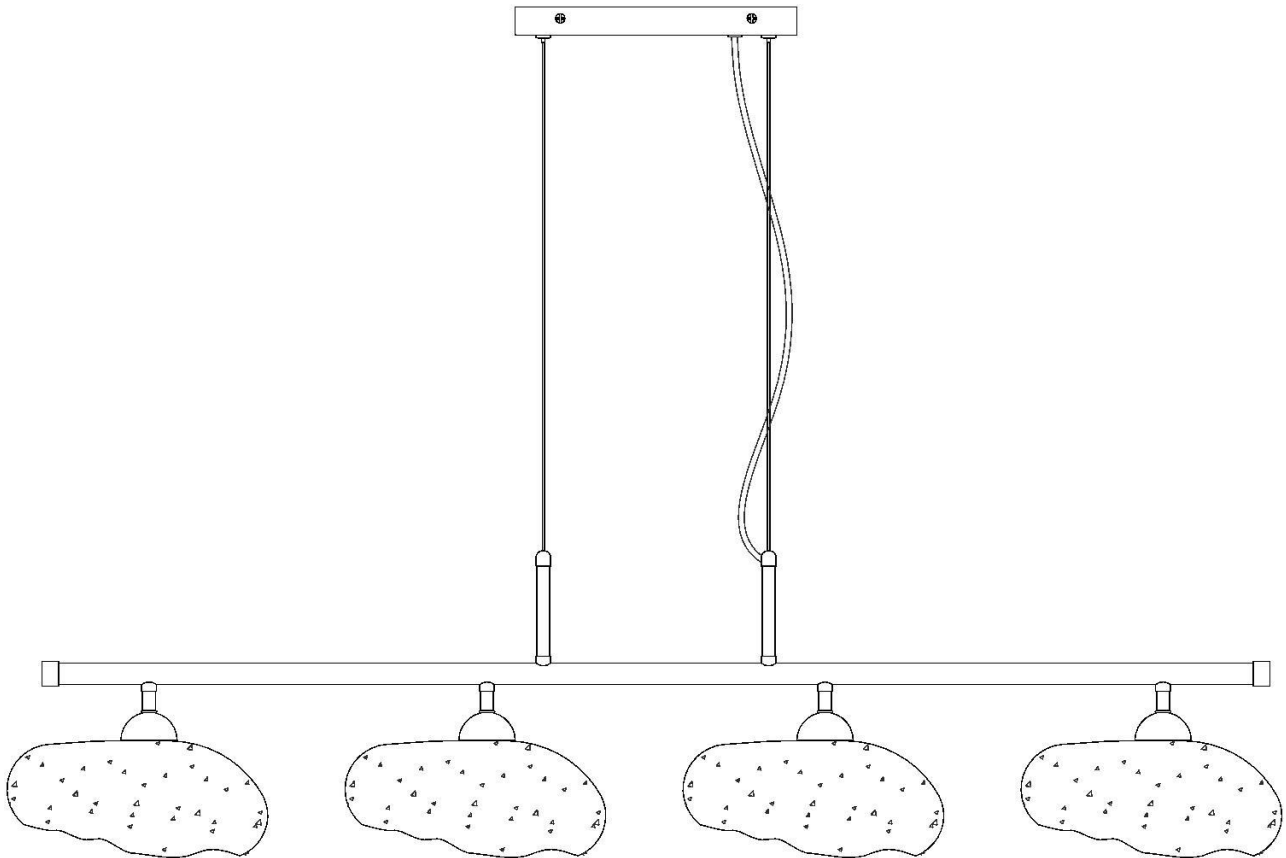

**TOOLS REQUIRED (NOT INCLUDED):**

Before starting assembly and installation please prepare the needed tools as below picture


				
Ladder	Philips Head or Flat Blade Screwdriver	Electrical Tape	Pliers	Wire Cutter/Stripper

**PARTS TYPE & QTY INCLUDING:**

- (C) Mounting plate (1)
- (D) Stud (4)
- (E) Canopy (1)
- (F) Lock nut (2)
- (G) Steel wire (2)
- (H) Cable (1)
- (I) Body (1)
- (J) Socket (4)
- (K) Lampshade (4)
- (L) Socket ring (4)

**ACCESSORIES & QTY ENCLOSED:**

- (A) Mounting screw (2)
- (B) Plastic wire connector (3)

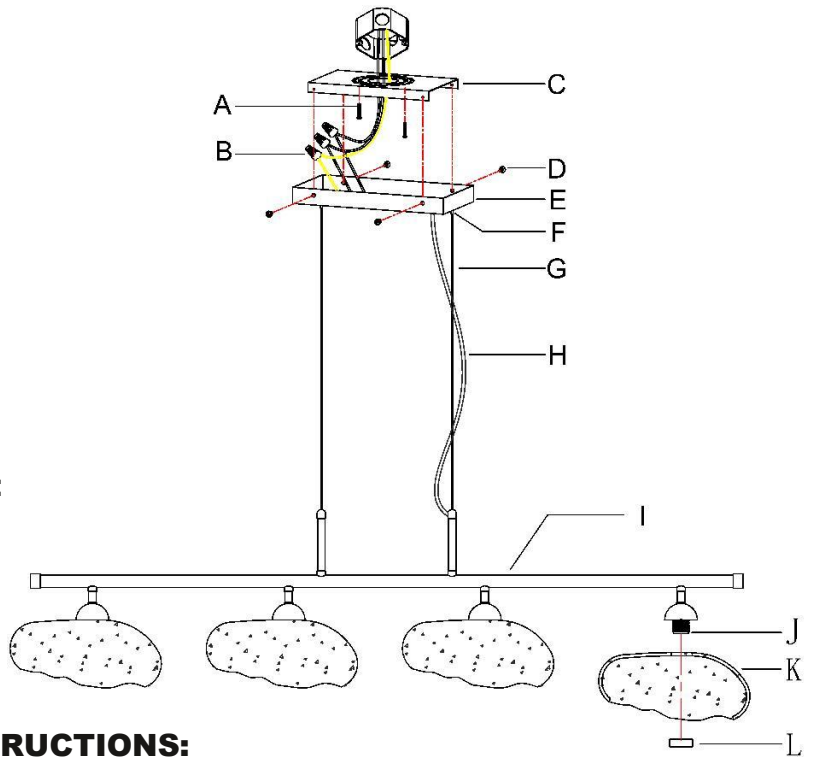

**ASSEMBLY & INSTALLATION INSTRUCTIONS:**

1. Carefully remove the fixture from the carton and check that all parts and accessories are included as shown in the above illustration.
2. Turn off power
  - Before you start the installation, NEVER attempt any work without shutting off the electricity until the work is done.
  - » Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the "OFF" position.
  - » Place the wall switch in the "OFF" position.
3. Make installation

<p><b>A1</b></p>	<p><b>A2</b></p> <p>OUTLET BOX</p>	<p><b>A3</b></p>
<p><b>A4</b></p>	<p><b>A5</b></p>	<p><b>A6</b></p>

**Step A1** » Unscrew studs (D) from mounting plate (C) and canopy (E) and then set them aside for later installation..


**Step A2** » 1) Carefully pass the supply wires from the outlet box through mounting plate (C).  
2) Secure mounting plate (C) to the outlet box with mounting screws (A).

**Step A3** » If needed, shorten the length of fixture wires. At this point, the remaining wire length measured above mounting plate (C) is at least 6".

**Step A4** » Make wire connections

Connect wires as below wires connection shown. **PLEASE NOTE THAT GROUND WIRE IS BARE COPPER WIRE, NEVER CONNECT OTHER WIRES TO GROUND WIRES.**

**Connect ground wires according to the below chart**

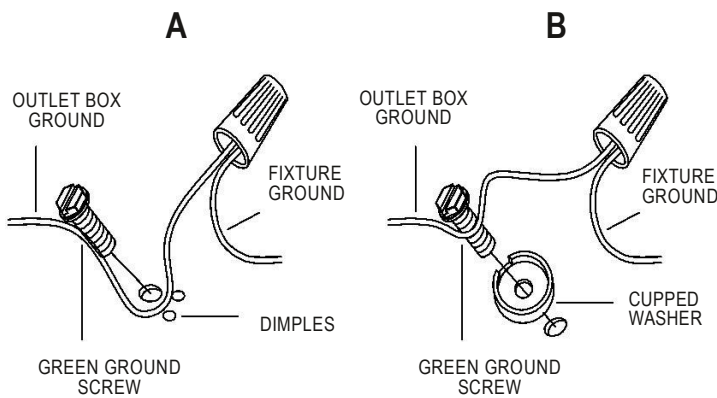

**Connect wires according to the below chart**

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

\* Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)

**Neutral Wire**

**Twist wires together with plastic wire connectors until tightly joined.**  
**Wrap each connector with approved electrical tape and be sure that no wire strands are exposed.**  
**Carefully tuck all wires into the outlet box.**

**Step A5** » Raise canopy (E) to the ceiling and secure canopy (E) in place by tightening studs (D) onto pre-assembled screws on mounting plate (C).

**Step A6** » 1) Remove socket rings (L) from sockets (J).  
2) Carefully place lampshades (K) onto sockets (J).  
3) Screw socket rings (L) to sockets (J) to secure lampshades (K)  
4) Install bulbs (not included) (Please do not exceed the maximum wattage recommended on the socket.)  
5) To adjust the hanging height of the fixture:  
• Press down and hold lock nuts (F) by hand.  
• Pull or push steel wires (I) and cable (H) in and out of canopy (E) to increase or decrease the hanging height.  
• **Please adjust steel wires (I) first.**

**5. Check everything is already installed properly, then you could turn on the light. Enjoy!**

**ORDERING PARTS**

Keep this sheet for future reference in case you need to order replacement parts. All parts for this fixture can be ordered from the place of purchase. Be sure to use exact wording from illustration when ordering parts.

**CLEANING**

To clean, wipe the fixture with a soft cloth. Clean glass with a mild cleaner (such as mild and non-abrasive soap). Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.