
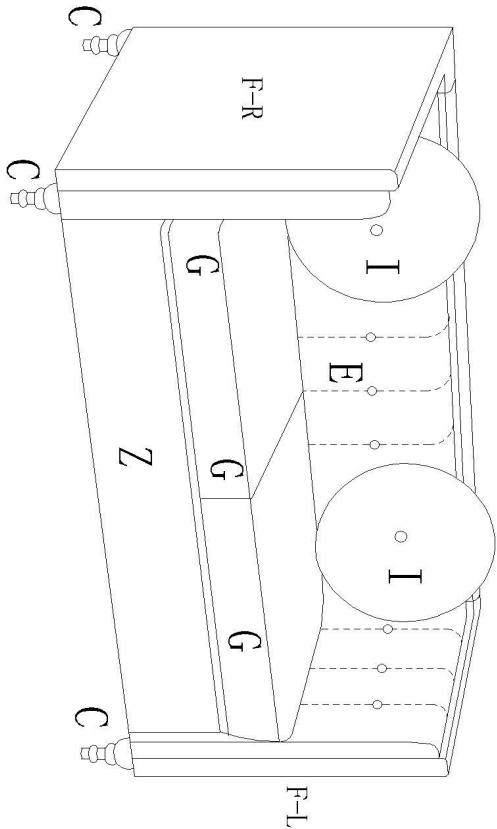






ASSEMBLY INSTRUCTIONS

ITEM S5564/S5565/S5566/S5567/S5568/S5607







 A: Allen Key 1PC	 B: BeIt 4PCS	 C: Leg 4PCS
 D: Shim 4PCS	 E: Backrest 1PC	 F: Arm 2PCS
 G: Seat Cushion 2PCS	 H: Seat Board 1PCS	 I: Pillow 2PCS
 Z: Front Beard 1PCS	 K: Center Bar 1PCS	



STEP1

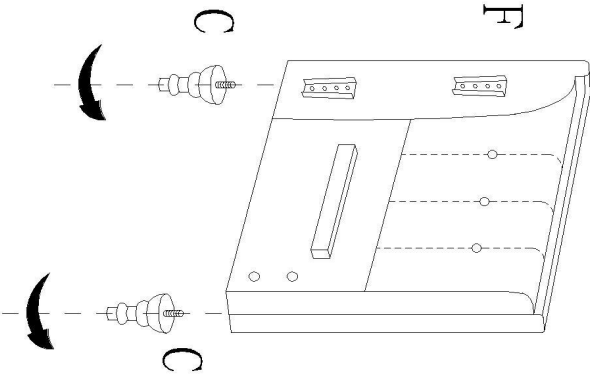

The diagram shows the backrest assembly (F) being attached to the main frame. Two screws (C) are shown being inserted into the backrest. A pillow (I) is shown being placed on the seat.

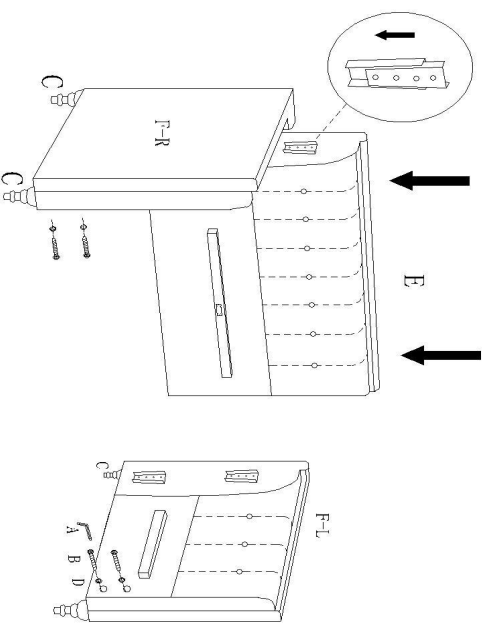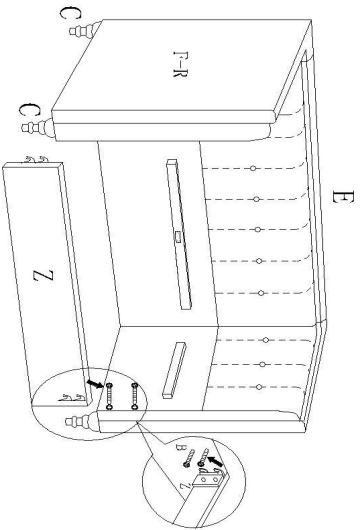STEP2 	STEP3 
---	--

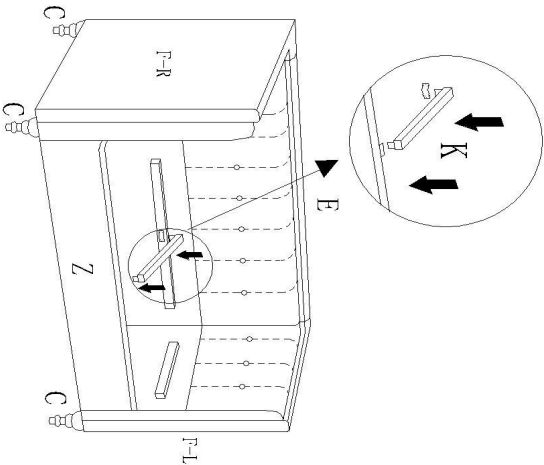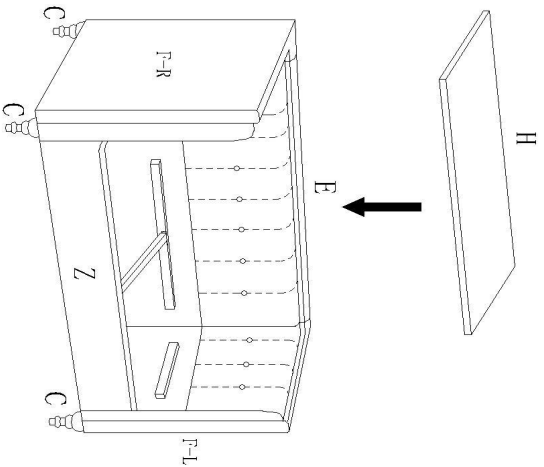STEP4 	STEP5 
---	---

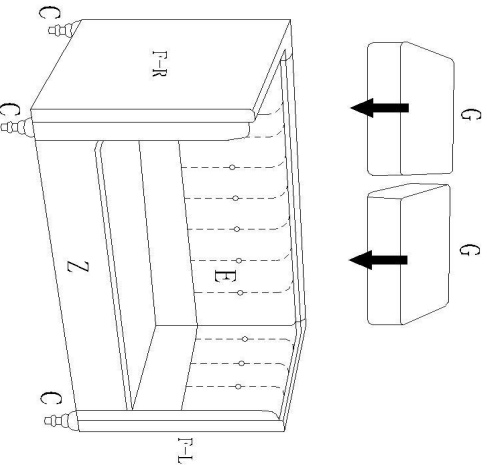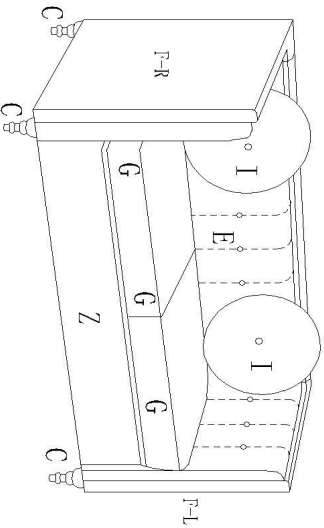STEP6 	STEP7 
--	--