


ASSEMBLY INSTRUCTIONS

Components List

Item		Quantity
A	MOUNTING RING	1
B	MOUNTING SCREW	2
C	WIRE CONNECTOR	2
D	TOGGLE ANCHOR	2
E	METAL SCREW	2
F	GROUND SCREW	2
G	BALL KNOB	2

Assembly Steps

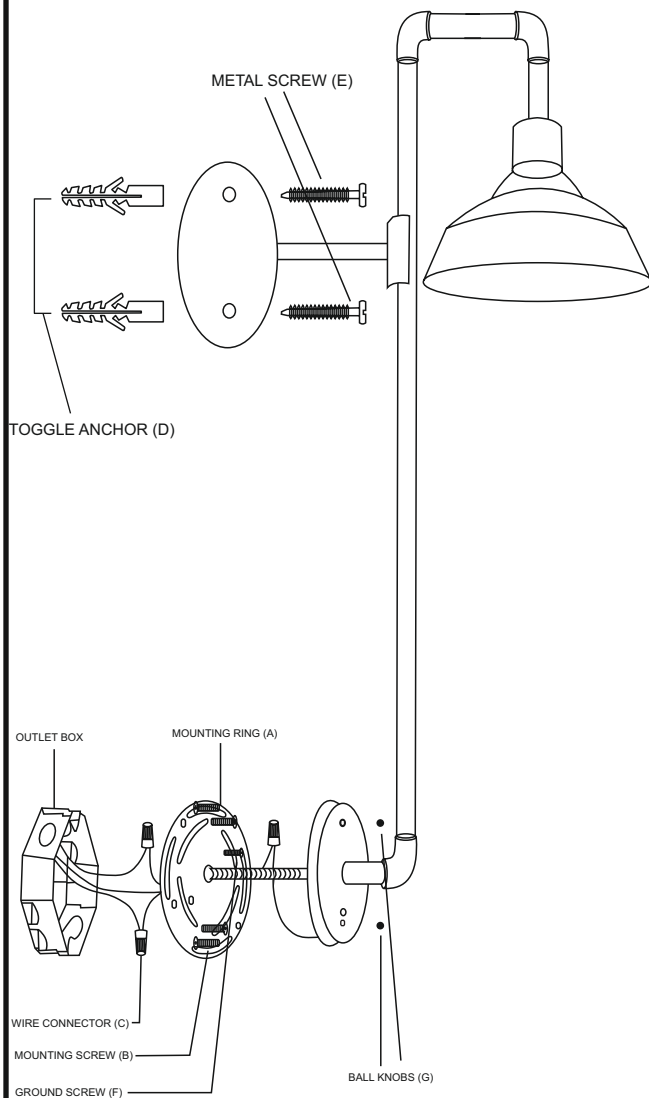

AVERAGE ASSEMBLY TIME: 20 Minutes.

NOTE:

THE COMPONENTS FOR ASSEMBLY ARE PLACED ON THE BOX WITH A RED STICKER, MARKED AS HARDWARE.

Fixture installation:

Before installing the fixture, be sure that the electricity is shut off. Turning off the power using the light switch is not sufficient.

Consult a certified electrician for installment of this piece.

Installation Instructions:

Place the fixture & components on a soft surface to avoid scratching.

1. Screw the two mounting screws (B) in to the mounting ring (A). Mount the mounting ring (A) to the outlet box make sure the threads of the mounting screws (B) are facing outside when the mounting ring (A) is attached to the outlet box.
2. Wrap the ground wire from the fixture around the ground screw (F) on the mounting ring (A) and then connect the ground wire from the fixture to the ground wire from the outlet box. Connect the neutral wire from the fixture to the neutral wire from the outlet box. Connect the hot wire from the fixture to the hot wire from the outlet box.
3. Place fixture body onto the mounting bracket and secure to mounting screw (B) with ball knobs (G).
4. Straighten fixture and mark holes at the top mounting ring (A) and mount the toggle anchor (D) in desire position on the wall.
5. Secure the top mounting ring (A) with Metal Screw (E).
6. Turn on power at the circuit breaker or fuse box.

Wiring Information

Hot Wire : Red Label
 Neutral Wire : Blue Label
 Ground Wire : Green Label