


CAUTION – RISK OF SHOCK –

Disconnect Power at the main circuit breaker panel or main fuse box before starting and during the installation.


- 1) Take one loose arm, slip hook at end of arm through loop on fixture body.
- 2) Pass threaded pipe on top of arm through hole in top trim.
- 3) Slip lockwasher over end of threaded pipe protruding from inside top trim. Thread hexnut onto threaded pipe. Tighten hexnut to secure arm in place.
- 4) Repeat steps 1-4 for remaining loose arm.
- 5) Take arm with fixture wire, pass fixture wire from top of arm through hole in top trim.
- 6) Pass fixture wire through hole in lockwasher. Thread lockwasher onto end arm protruding from inside top trim. Pass fixture wire through hole in hexnut. Thread hexnut onto end of arm. Tighten hexnut to secure arm in place.
- 7) Pass fixture wire through hole in top plate. Lower top trim down. Pass threaded pipe in center of top trim through hole in top plate.
- 8) Pass fixture wire through hole in coupling. Thread coupling onto threaded pipe protruding from top plate.
- 9) Pass fixture wire through end of stem into coupling.
NOTE: Thread locking compound must be applied to all stem threads to prevent accidental rotation of fixture during cleaning, relamping, etc.
- 10) Pass fixture wire through remaining stems and screw stems together.
- 11) Thread small threaded pipe into end of small loop.
- 12) Pass fixture wire through end of threaded pipe on small loop. Thread small loop onto end of last stem.
- 13) Take threaded pipe from parts bag and screw in screw collar loop a minimum of 6 mm (1/4"). Lock into place with hexnut.
- 14) Run another hexnut down threaded pipe almost touching first hexnut. Now screw threaded pipe into mounting strap. Mounting strap must be positioned with extruded thread faced into outlet box. Threaded pipe must protrude out the back of mounting strap. Screw third hexnut onto end of threaded pipe protruding from back of mounting strap.
- 15) Connect mounting strap to outlet box.
- 16) Unscrew the threaded ring from screw collar loop. Take canopy and pass over screw collar loop. Approximately one half of the screw collar loop exterior threads should be exposed. Adjust screw collar loop by turning assembly up or down in mounting strap. Remove canopy.
- 17) After desired position is found, tighten both top and bottom hexnuts up against the bottom and top of the mounting strap.
- 18) Slip canopy over screw collar loop and thread on threaded ring. Attach chain (with fixture connected) to bottom of screw collar loop. Unscrew threaded ring, let canopy and threaded ring slip down.
- 19) Weave electrical wire and ground wire through chain links no more than 3 inches apart. Pass wire through threaded ring, canopy, screw collar loop, threaded pipe and into outlet box.
- 20) Grounding instructions: (See Illus. A or B).
A) On fixtures where mounting strap is provided with a hole and two raised dimples. Wrap ground wire from outlet box around green ground screw, and thread into hole.
B) On fixtures where a cupped washer is provided. Attach ground wire from outlet box under cupped washer and green ground screw, and thread into mounting strap.
If fixture is provided with ground wire. Connect fixture ground wire to outlet box ground wire with wire connector (not provided.) after following the above steps. Never connect ground wire to black or white power supply wires.

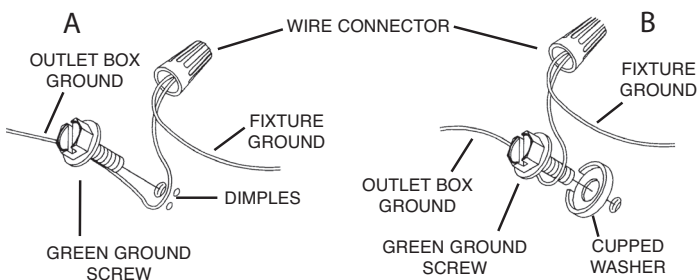

- 21) Make wire connections (connectors not provided). Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



- 22) Raise canopy to ceiling.
- 23) Secure canopy in place by tightening threaded ring onto screw collar loop.
- 24) Insert recommended bulbs (Not supplied).
- 25) Place glass trim into center of glass.
- 26) Lower glass down over socket. Pass hole in glass over socket.

