

**4" Round Economy Super Thin Recessed LED 11W**



**Type IC, Wet & Air-Tight**

**DESCRIPTION**

4" Round Recessed LED With Integral Driver In Connection Box  
Fits Where No Other Recessed Fixture Can


**FEATURES & BENEFITS**

- 1/2" Deep - Install Directly Under Joists - Maximum Layout Flexibility
- Driver Inside Connection Box - No Junction Box Needed
- Fast & Easy To Install - Save On Labor
- Type IC Rated - No Housing Required

**MOUNTING**

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. Ceiling Clearance Required For Driver: 2"

**DIMENSIONS:** ID 4" OD 4 7/8" Cut Out 4" to 4 1/4"

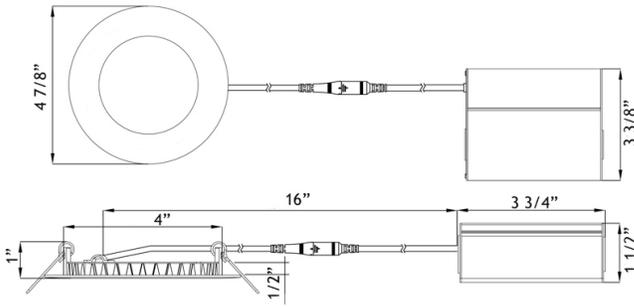

120V TRIAC Dimmable  
Driver Included

Optional 120V - 347V  
Driver 0-10V Dimmable



Order Separately as  
Cat # LLL-LD1535TB

**AVAILABLE TRIMS**



**ORDERING GUIDE** Example: **LB4R / 30K / WH**

	CCT	Trim Finish	
<b>LB4R</b>	/	/	
3000K	<b>30K</b>	<b>WH</b>	White
4100K	<b>41K</b>	<b>BK</b>	Black

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Cat #: \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

**SPECIFICATION**

Applications	Recessed Ceiling, Showers & Soffits	
Energy Used	11 W	
Colour Temperature	3000	4100
Light Output	700	730
Halogen Equivalent	65 W	
Beam Angle	110°	
CRI	80	
Default Driver Input	120V AC	Triac Dimmable
Optional Driver Input	120V-347V AC	0-10V Dimmable
Power Factor	0.95	
Approved Location	Insulated Ceiling, Wet & Damp Locations	
IP Rating	IP 54	
Air Tight	Yes	
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)	
Projected Life	70% Light Output at 36,000 Hours	
Certification	cULus, Energy Star	
Warranty	5 Year	

**ACCESSORIES**

Sold Separately



Low Voltage Extension Cables  
10ft - cat # **EXC10**  
Max 40 ft Allowed. FT4 / CMR rated



Flat Rough-In Plates - cat # **RIP4**



Flanged Rough-In Plate - cat # **FRP4**



Goof Ring OD 5 3/4"  
White cat # **GR4** Black cat # **GR4-BK**

**COMPLIANCE**



**Type IC  
Air-Tight**