


Assembly Instructions




R/T Conference table

A  Cam lock 28Pcs*(2*Polypropylene)	B  Klix Cam 28Pcs*(2*Polypropylene)	C  Cam Cover 28Pcs*(2*Polypropylene)	D  Dowel 16Pcs*(2*Polypropylene)	E  Adjustable Glide 8 Pcs	F  Glide L-Bracket 16Pcs	G  Screw*150" 68Pcs*(1*Polypropylene)	H  L-Bracket 2Pcs	I  Screw 2Pcs
--	--	---	---	--	---	--	--	--



STEP1

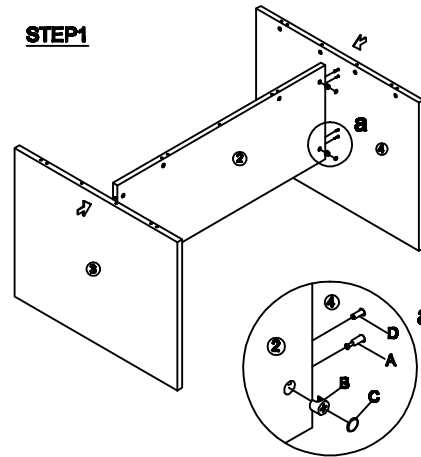




**IMPORTANT:
FUNCTION OF KLIX CAM**
1/4 RIGHT
TURN FOR
LOCKING
MAKE SURE THE ARROW IS
POINTING UPWARDS BEFORE
INSERTING INTO THE PANEL'S
HOLE



STEP2

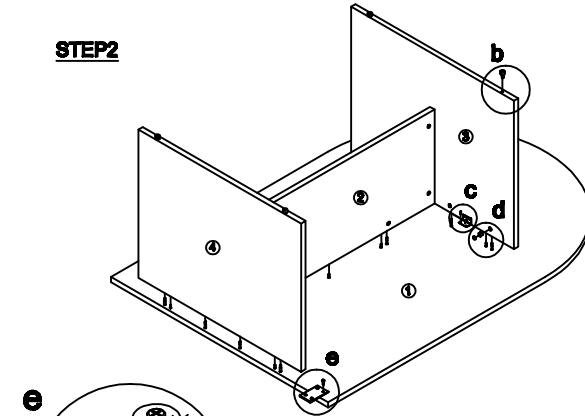

STEP3

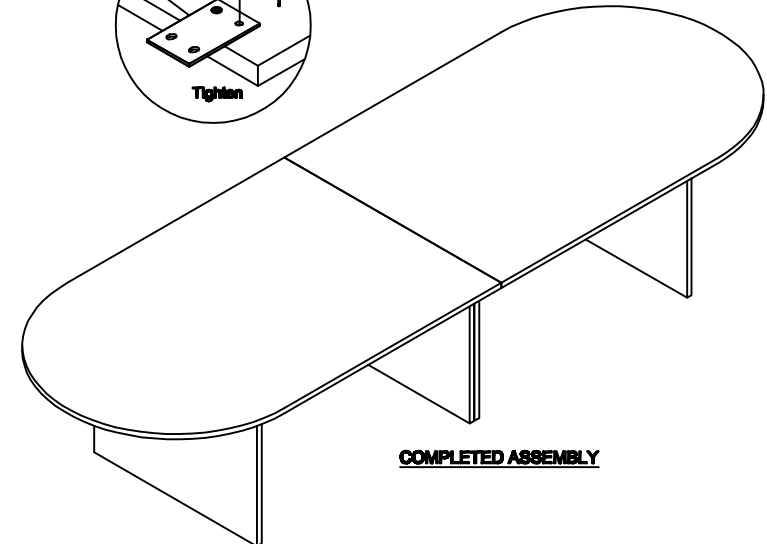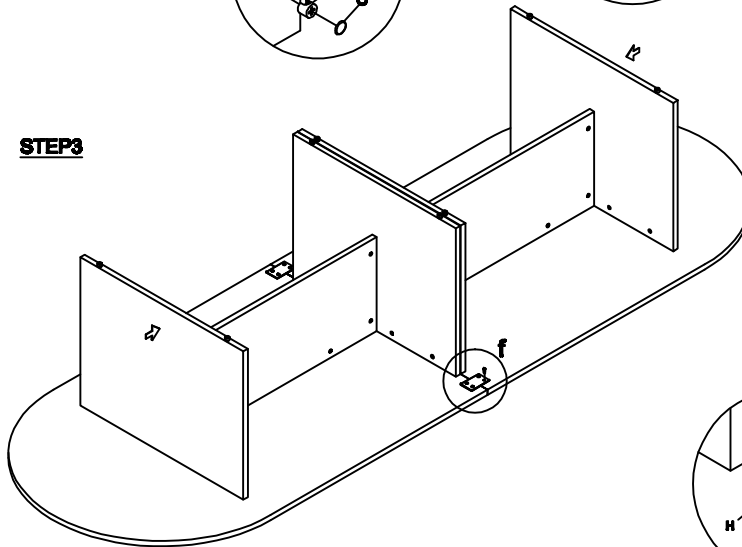

COMPLETED ASSEMBLY

IMPORTANT NOTE:

- Place all laminated parts on a clean and smooth surface such as a rug or carpet to avoid the parts from being scratched.
- Check to be sure that you have all parts and hardware.
- Remove all wrapping materials, including staples & packing straps before you start to assemble.
- Don't tighten all screws/bolts until all completely assembled.
- Keep all hardware parts out of reach of children

