














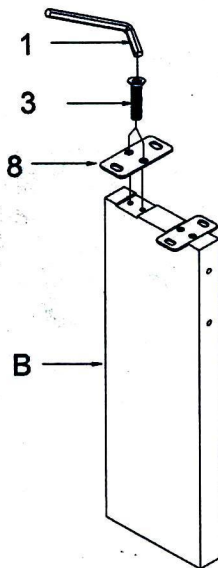


ASSEMBLY INSTRUCTION

DESCRIPTION: 76"L x 40.5"D x 30"H DINING TABLE


A1	TABLE TOP 1		1PC	1	ALLEN WRENCH (5MM)		1PC
A2	TABLE TOP 2		1PC	2	SHORT BOLT (DIA 5/16" L 7/8")		16PCS
B	LEG		4PCS	3	UMBRELLA BOLT (DIA 5/16" L 7/8")		16PCS
C1	CONNECTING FRAME 1		1PC	4	LARGE BOLT (DIA 5/16" L 1-1/4")		10PCS
C2	CONNECTING FRAME 2		1PC	5	LOCK WASHER (DIA 5/16")		26PCS
D	GLASS TOP		1PC	6	LARGE FLAT WASHER (DIA 5/16" 19mm)		16PCS
				7	SMALLER FLAT WASHER (DIA 5/16" 16mm)		10PCS
				8	METAL (110*50*3mm)		8PCS
				9	PLASTIC CAP		8PCS

STEP 1



Step 1: Attach the metal plate to the leg by using the umbrella bolts with allen wrench as shown on the drawing.


STEP 2

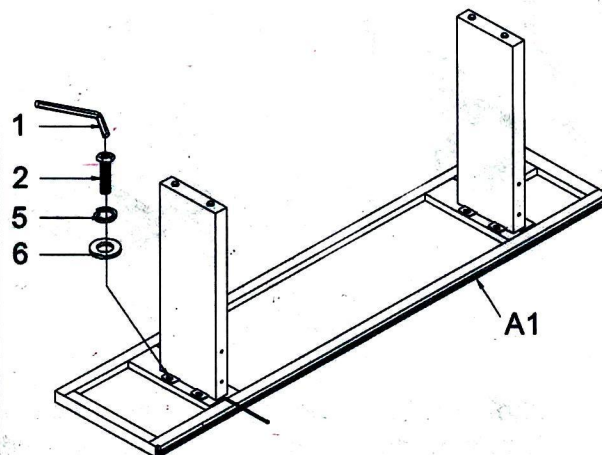

Step 2: Attach the leg to the table top (A1) by using short bolts, lock washer and large flat washers with allen wrench as shown on the drawing.


ASSEMBLY INSTRUCTION

STEP 3

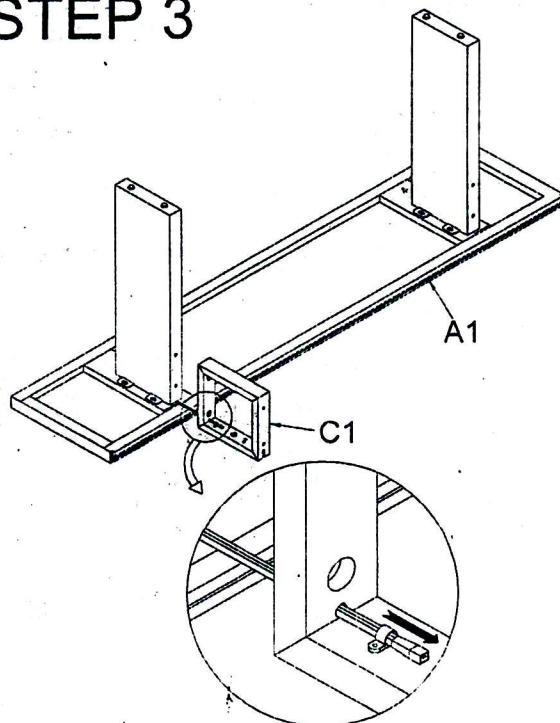


Step 3: Put the wire through the hole on the connecting frame C1 as shown on the drawing.

STEP 4

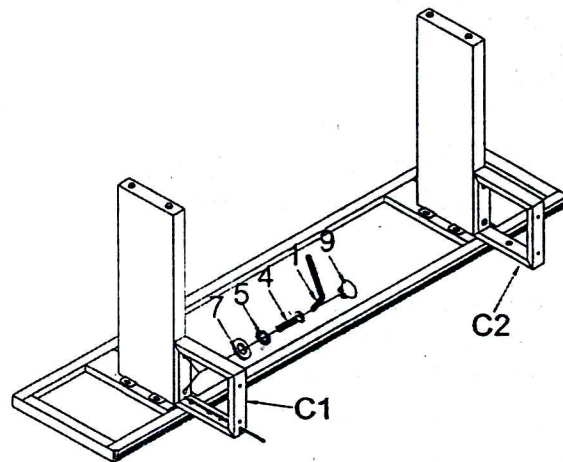


Step 4: Attach the connecting frame to the leg by using large bolts, lock washers and smaller flat washers with allen wrench. Insert plastic cap to the holes on the connecting frame.

STEP 5

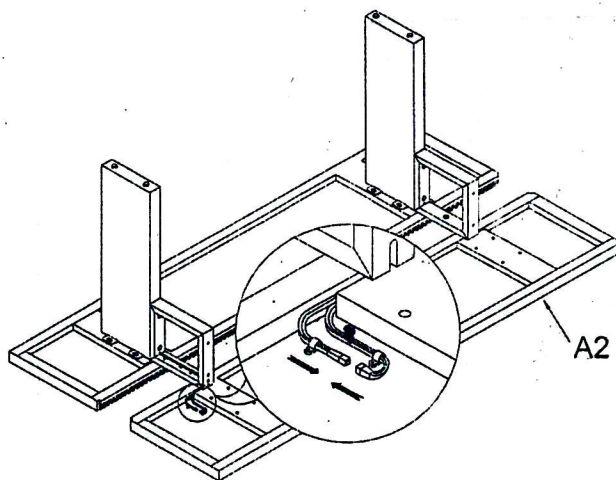


Step 5: Insert the end of wire into the interface of the other wire on table top (A2) as shown on the drawing

STEP 6

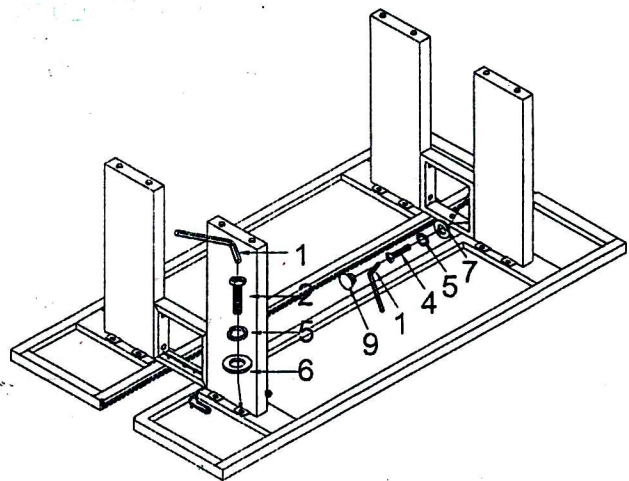


Step 6: Attach the connecting frame to the leg by using large bolts, lock washers and smaller flat washers with allen wrench. Insert plastic cap to the holes on the connecting frame. Attach the leg to the table top (A2) by using short bolts, lock washer and large flat washers with allen wrench as shown on the drawing.

STEP 7

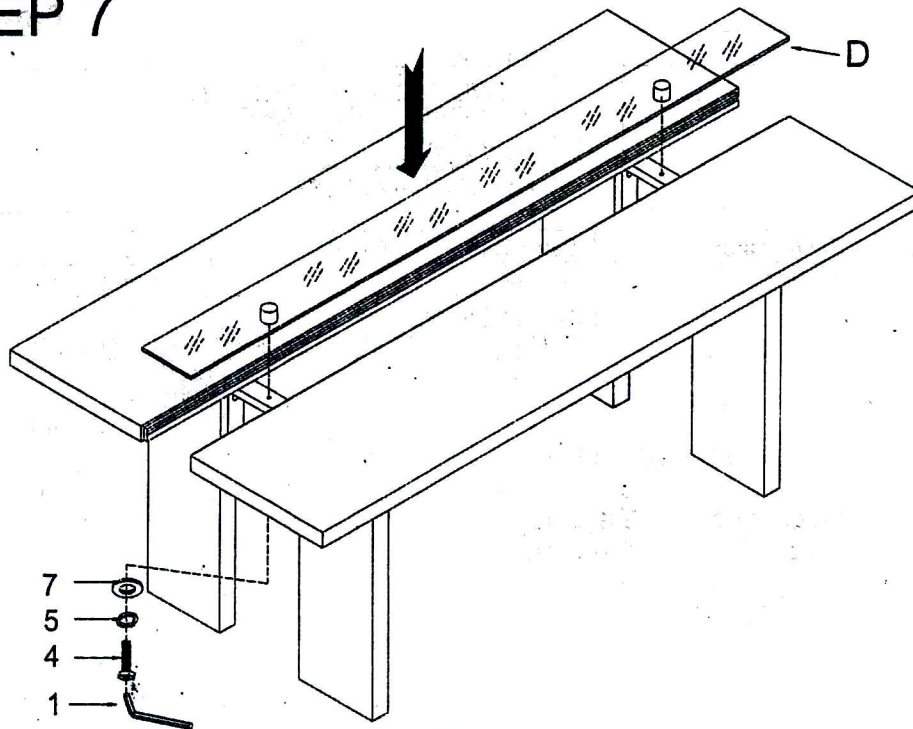

Step 7: Attach the glass top to the table top by using large bolts, lock washers and smaller flat washers with allen wrench. as shown on the drawing.

STEP 8

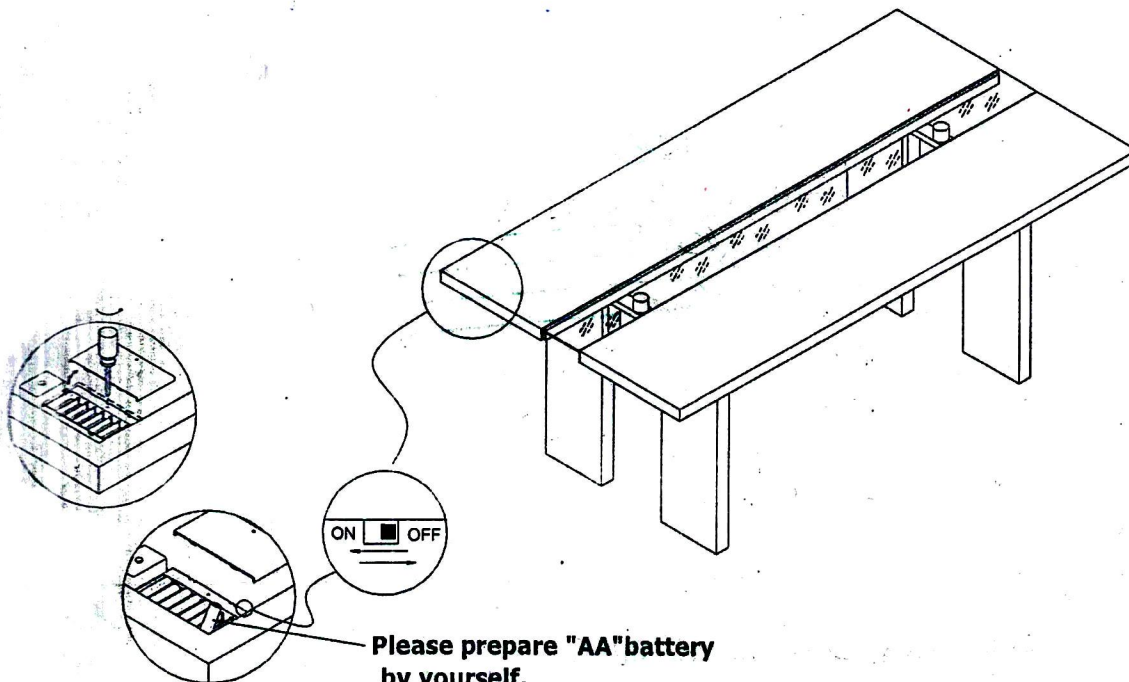

Step 8: Please take off the screw with the screw-driver, then open the cap and insert battery, and then close the cap and lock the screw with screw-driver.