




ASSEMBLY INSTRUCTION

Read instruction carefully prior to assembly.


Thank you for purchasing this quality product. Check carefully for small parts which may come loose during shipment. Remove all components from pack and place top down on soft surface such as carpet or cloth to prevent scratching the finish. Identify and count all parts as specified below.

It is recommended to use two or more persons during the assembly process.

HARDWARE LIST					
No.	Description	Sketch	Size	Qty' / 1 Table	Total
1	Short Bolt		$\phi\frac{1}{4}$ " x 40mm	16 pcs	16 pcs
2	Lock Washer		$\phi\frac{5}{16}$ " x 13mm	16 pcs	16 pcs
3	Flat Washer		$\phi\frac{5}{16}$ " x 19mm	16 pcs	16 pcs
4	Long Screw		$\phi\frac{5}{32}$ " x 60mm	4 pcs	4 pcs
5	Medium Screw		$\phi\frac{5}{32}$ " x 40mm	17 pcs	17 pcs
6	Short Screw		$\phi\frac{5}{32}$ " x 25mm	28 pcs	28 pcs
7	Allen Key		4 mm	1 pc	1 pc


PART LIST					
No.	Description	Sketch	Qty' / 1 Table	Qty' / 1 Cnt	
A	Table Top		1 pc	1 pc	
B	Table Leg		4 pcs	4 pcs	
C	Center Stretcher C		1 pc	1 pc	
D	Center Stretcher D		1 pc	1 pc	
E	Mounting Plate		1 pc	1 pc	
F	Corner Block		4 pcs	4 pcs	

Step 1

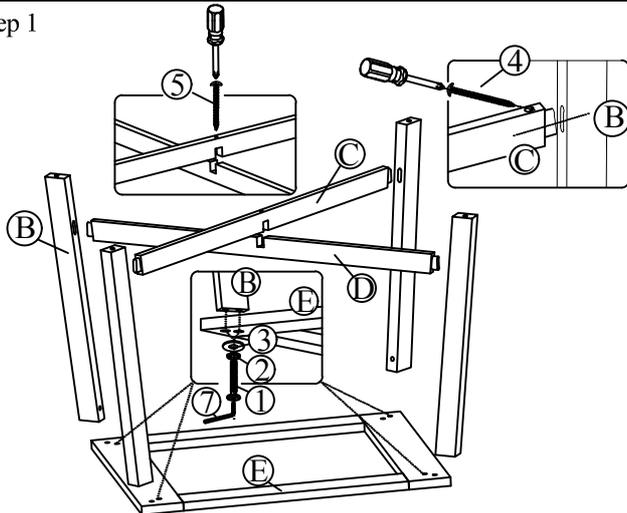


Step 1: Attach Table Leg (B) to the Mounting Plate (E) by using Short Bolt (1), Lock Washer (2), Flat Washer (3) and tighten with Allen Key (7). Do not over tighten. Attach the Center Stretcher C and D (together) to the middle of 4 Table Leg (B) by using Long Screw (4) at the corner; Medium Screw (5) at the center Stretcher. Fully tighten all Screws with a Philips screw drivers (not provided) and Bolts with Allen key (7).

Step 2

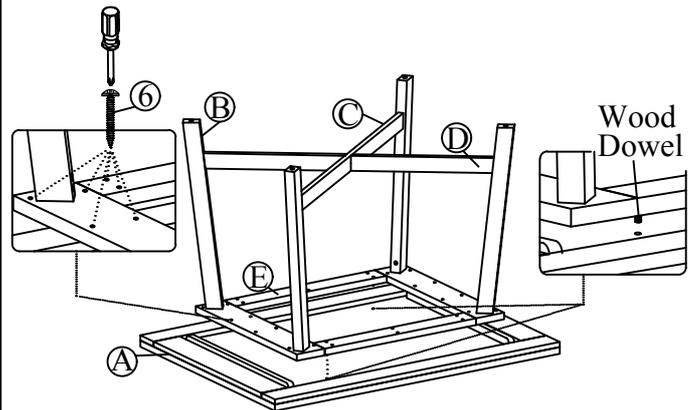


Step 2: Attach the Assembly Base in Step 1 to the Table Top (A) by aligning the Wood Dowels on the Mounting Plate (E) to the pre-drill holes on Table Top (A) and secure them by using Short Screw (6) and tighten with a Philips screw drivers (not provided). Do not over tighten.

Step 3

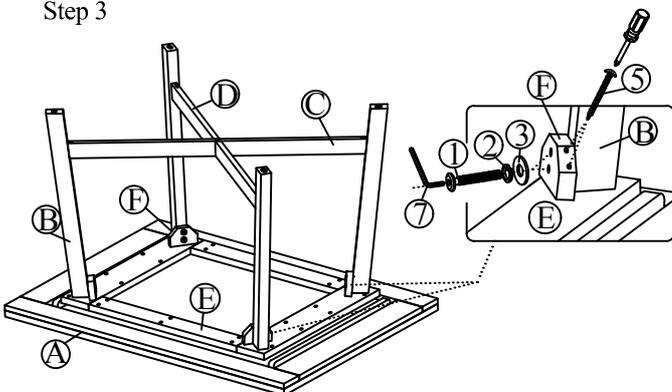

Step 3: Attach Corner Block (F) to the Table Leg (B) by using Short Bolt (1), Lock Washer (2), Flat Washer (3) and fully tighten with Allen Key (7). Attach the Corner Block (F) to the Mounting Plate (E) by using Medium Screw (5) and fully tighten with a Philips screw drivers (not provided).

Step 4

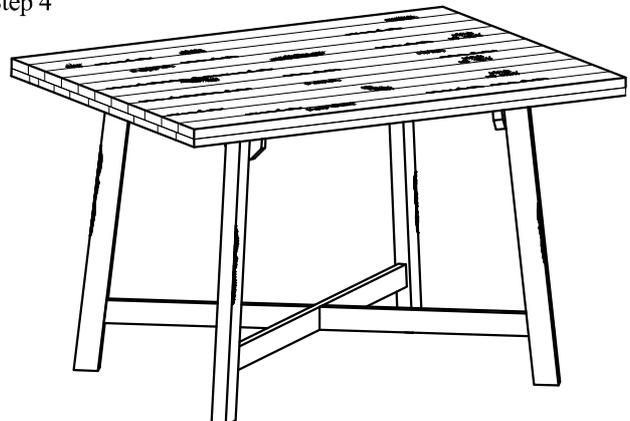

Step 3: Turn the Table to upright position. Tighten all Bolts and Screws by using Allen Key (7) and Philips screw drivers (not provided). Assembly product is now completed.

Cleaning instructions: Clean using soft cloth


ASSEMBLY INSTRUCTION

Read instruction carefully prior to assembly.


Thank you for purchasing this quality product. Check carefully for small parts which may come loose during shipment. Remove all components from pack and place top down on soft surface such as carpet or cloth to prevent scratching the finish. Identify and count all parts as specified below.

It is recommended to use one person during the assembly process.

HARDWARE LIST					
No.	Description	Sketch	Size	Qty/ 1 Chair	Total
1	Long Bolt		$\phi\frac{1}{4}$ " x 75mm	4 pcs	16 pcs
2	Short Bolt		$\phi\frac{1}{4}$ " x 40mm	3 pcs	12 pcs
3	Lock Washer		$\phi\frac{5}{16}$ " x 13mm	11 pcs	44 pcs
4	Flat Washer		$\phi\frac{5}{16}$ " x 19mm	11 pcs	44 pcs
5	Hex Nut		$\phi\frac{5}{16}$ " x 12mm	4 pcs	16 pcs
6	Allen Key		4 mm	1 pc	1 pc
7	Wrench		12 mm	1 pc	1 pc


PART LIST				
No.	Description	Sketch	Qty/ 1 Chair	Qty/ 1 Cnt
A	Chair Back		1 pc	4 pcs
B	Wooden Seat Frame		1 pc	4 pcs
C	Front Leg		2 pcs	8 pcs

Step 1

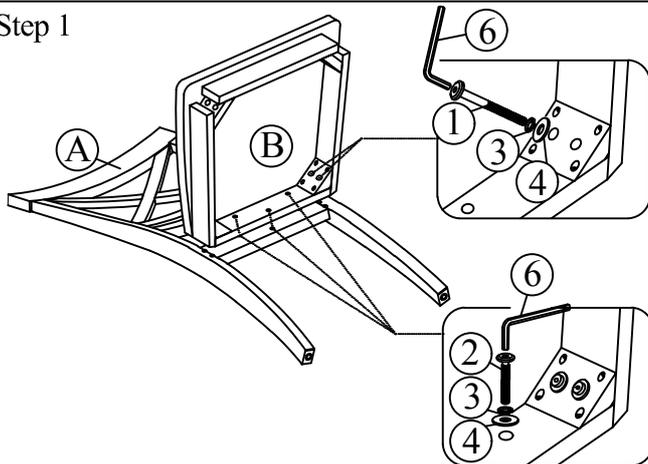


Step 1: Attach Wooden Seat Frame (B) to Chair Back (A) by securing the Short Bolt (2), Lock Washer (3), Flat Washer (4) on back rail and Long Bolt (1), Lock Washer (3), Flat Washer (4) onto corner, tighten with Allen Key (6). Do not fully tighten.

Step 2

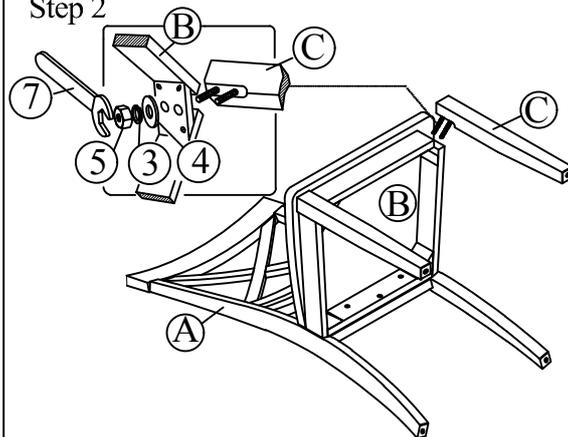

Step 2: Attach the Front Leg (C) to seat frame using Flat washer (4), Lock washer (3) and Hex nut (5), tighten with Wrench (7). Do not fully tighten.

Step 3

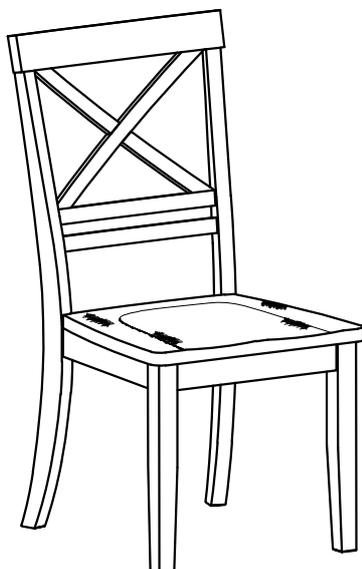

Step 3: Place the chair on flat surface and adjust legs so that chair is level and does not wobble. Tighten all Bolts and Hex Nuts with Allen Key (6) and Wrench (7) provided.

Assembly product is completed .

Cleaning instructions: Clean using soft cloth

ASSEMBLY INSTRUCTION

Read instruction carefully prior to assembly.




Thank you for purchasing this quality product. Check carefully for small parts which may come loose during shipment. Remove all components from pack and place top down on soft surface such as carpet or cloth to prevent scratching the finish. Identify and count all parts as specified below.

It is recommended to use two or more person during the assembly process.


PARTS LIST:

No.	Description	Sketch	Size	Qty' / 1 Chair	Total
1	Chair Long Bolt		φ1/4" x 75mm	4 pcs	16 pcs
2	Chair Short Bolt		φ1/4" x 40mm	2 pcs	8 pcs
3	Lock Washer		φ5/16" x 13mm	10 pcs	40 pcs
4	Flat Washer		φ5/16" x 19mm	10 pcs	40 pcs
5	Hex Nut		φ5/16" x 12mm	4 pcs	16 pcs
6	Allen Key		4 mm	1 pc	1 pc
7	Open Wrench		12 mm	1 pc	1 pc
8	Medium Screw		4 mm x40 mm	6 pcs	24 pcs

PART LIST:


No.	Description	Sketch	Qty' / 1 Chair	Total
A	Chair Back		1 pc	4pcs
B	Wood Seat Frame		1 pc	4pcs
C	Left Front Leg		1 pc	4pcs
D	Right Front Leg		1 pc	4pcs
E	Front Stretcher		1 pc	4pcs
F	Left Side Stretcher	 sticker stick under stretcher	1 pc	4pcs
G	Right Side Stretcher	 sticker stick under stretcher	1 pc	4pcs

Step 1

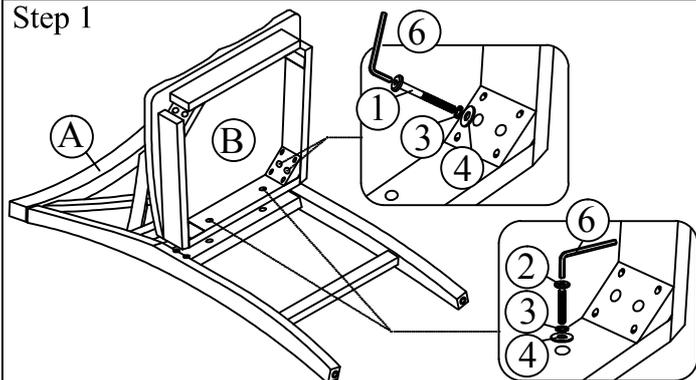


Step 1: Attach Wooden Seat Frame (B) to Chair Back (A) by securing the Flat Washer (4), Lock Washer (3), Chair Short Bolt (2) on back rail and Chair Long Bolt (1) onto Corner with Allen Key (6). Do not fully tighten.

Step 2

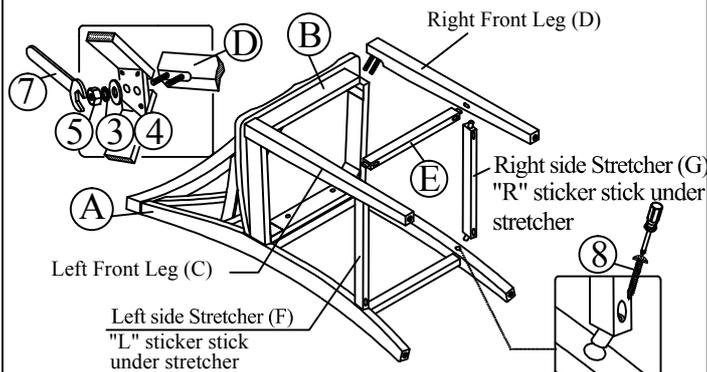

Step 2: Attach the Left and Right Front Legs (C)(D) to Seat Frame using Flat washer (4), Lock washer (3) and Hex nut (5) by using Open Wrench (7). Attach the Front, Left side, Right side of Stretcher (E)(F)(G) to Right, left of Front Leg and Chair back by securing the Medium Screw (8) with Phillips screw drivers (not provided).

Step 3

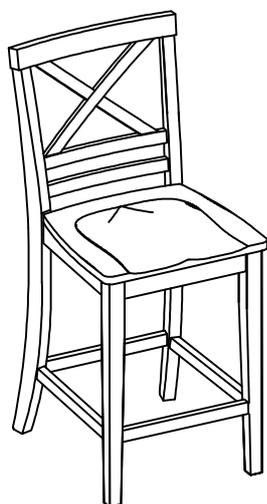

Step 3: Place the chair on flat surface and adjust legs so that chair is level and does not wobble. Tighten all Bolts and Hex nut with Allen Key (6) and Open Wrench (7) provided. Assembly product is completed.

Cleaning instructions: Clean using soft cloth

ASSEMBLY INSTRUCTION

Read instruction carefully prior to assembly.

Thank you for purchasing this quality product. Check carefully for small parts which may come loose during shipment. Remove all components from pack and place top down on soft surface such as carpet or cloth to prevent scratching the finish. Identify and count all parts as specified below.

It is recommended to use two or more person during the assembly process.


PARTS LIST:

No.	Description	Sketch	Size	Qty'
1	Chair Long Bolt		$\phi\frac{1}{4}$ " x 75mm	4 pcs
2	Chair Short Bolt		$\phi\frac{1}{4}$ " x 40mm	2 pcs
3	Lock Washer		$\phi\frac{5}{16}$ " x 13mm	10 pcs
4	Flat Washer		$\phi\frac{5}{16}$ " x 19mm	10 pcs
5	Hex Nut		$\phi\frac{5}{16}$ " x 12mm	4 pcs
6	Allen Key		4 mm	1 pc
7	Open Wrench		12 mm	1 pc
8	Medium Screw		4 mm x40 mm	6 pcs

PART LIST:


No.	Description	Sketch	Qty'
A	Chair Back		1 pc
B	Wood Seat Frame		1 pc
C	Left Front Leg		1 pc
D	Right Front Leg		1 pc
E	Front Stretcher		1 pc
F	Left Side Stretcher		1 pc
G	Right Side Stretcher		1 pc

Step 1

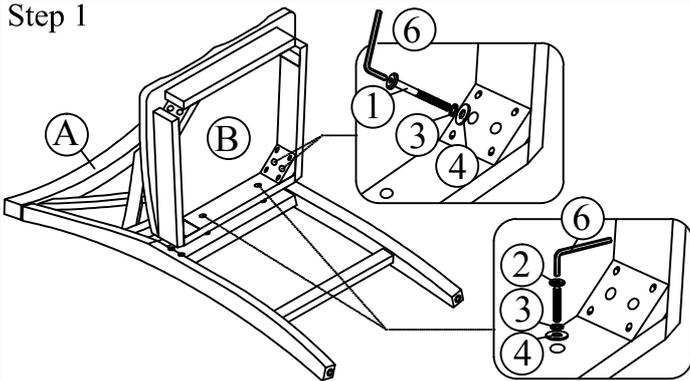


Step 1: Attach Wooden Seat Frame (B) to Chair Back (A) by securing the Flat Washer (4), Lock Washer (3), Chair Short Bolt (2) on back rail and Chair Long Bolt (1) onto Corner with Allen Key (6). Do not fully tighten.

Step 2

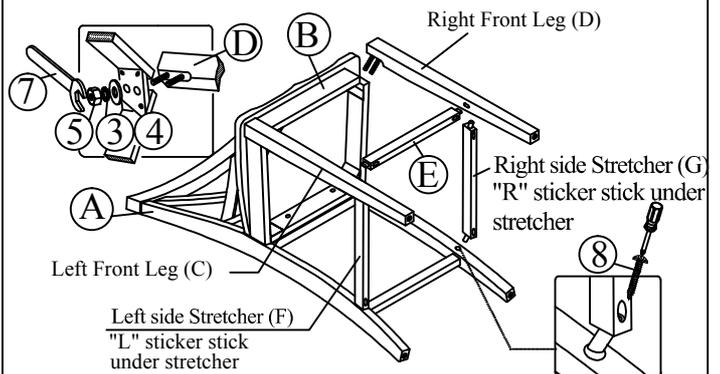

Step 2: Attach the Left and Right Front Legs (C)(D) to Seat Frame using Flat washer (4), Lock washer (3) and Hex nut (5) by using Open Wrench (7). Attach the Front, Left side, Right side of Stretcher (E)(F)(G) to Right, left of Front Leg and Chair back by securing the Medium Screw (8) with Phillips screw drivers (not provided).

Step 3

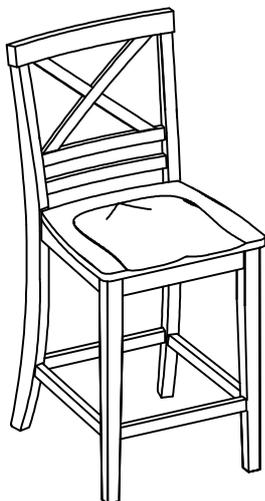

Step 3: Place the chair on flat surface and adjust legs so that chair is level and does not wobble. Tighten all Bolts and Hex nut with Allen Key (6) and Open Wrench (7) provided. Assembly product is completed.

Cleaning instructions: Clean using soft cloth




ASSEMBLY INSTRUCTION

Read instruction carefully prior to assembly.


Thank you for purchasing this quality product. Check carefully for small parts which may come loose during shipment. Remove all components from pack and place top down on soft surface such as carpet or cloth to prevent scratching the finish. Identify and count all parts as specified below.

It is recommended to use two or more person during the assembly process.

HARDWARE LIST					
No.	Description	Sketch	Size	Qty'/ 1 Table	Total
1	Table Short Bolt		$\phi\frac{1}{4}$ " x 40mm	16 pcs	16 pcs
2	Lock Washer		$\phi\frac{5}{16}$ " x 13mm	16 pcs	16 pcs
3	Flat Washer		$\phi\frac{5}{16}$ " x 19mm	16 pcs	16 pcs
4	Short Screw		$\phi\frac{5}{32}$ " x 25mm	28 pcs	28 pcs
5	Allen Key		4 mm	1 pc	1 pc
6	Wood Dowel		$\phi 8$ x 20 mm	2 pcs	2 pcs


PART LIST				
No.	Description	Sketch	Qty'/ 1 Table	Qty'/ 1 Cnt
A	Table Top		1 pc	1 pc
B	Table Apron		1 pc	1 pc
C	Mounting Plate		1 pc	1 pc
D	Table Leg		4 pcs	4 pcs

Step 1

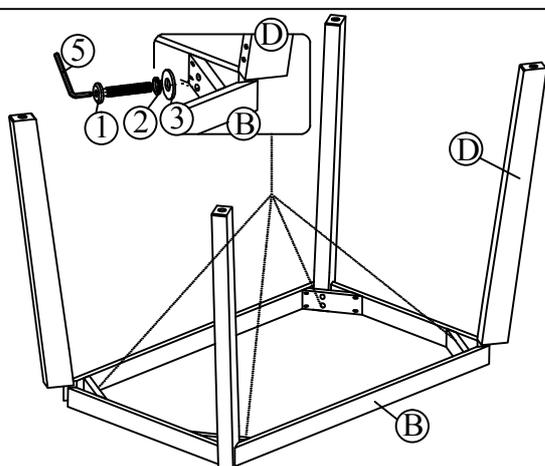


Step 1: Attach Table Leg (D) to each corner of the Table Apron (B) by using Table Short Bolt (1), Lock Washer (2), Flat Washer (3) and tighten with Allen Key (5). Do not fully tighten

Step 2

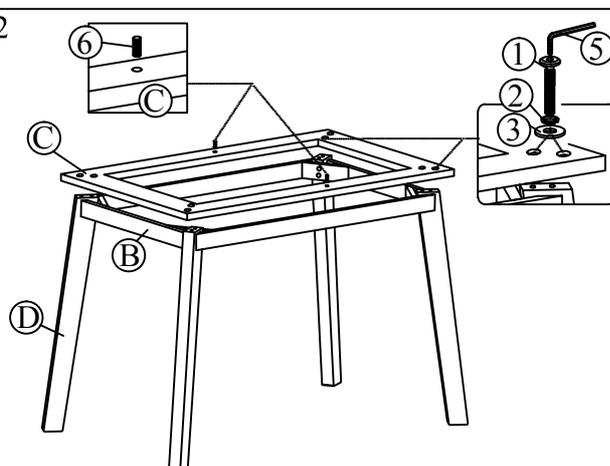


Step 2: Attach Mounting Plate (C) to the top of Table Leg (D) by using Table Short Bolt (1), Lock Washer (2), Flat Washer (3) and Fully tighten all Bolt in Step 1 □ Step 2 with Allen Key (5). Do not over tighten. Insert Wood Dowel (6) into the pre-drilled hole on the Mounting Plate (C) follow the picture show.

Step 3

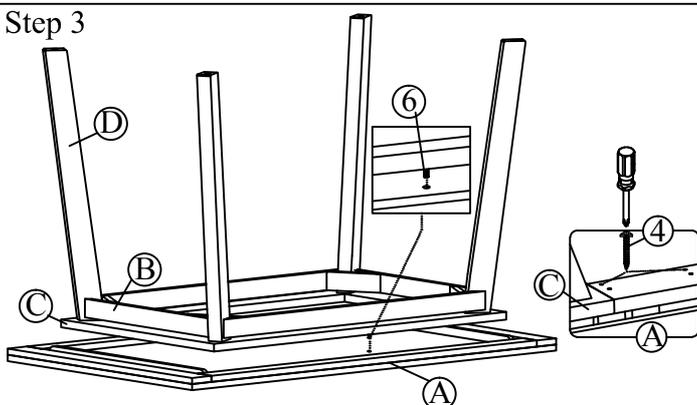

Step 3: Place the Table Top (A) upside down on a piece of cloth or carpet to prevent finish from scratching. Aligning the Wood Dowel (6) on the Mounting Plate (C) to the pre-drilled hole on the table slide of Table Top (A). Attach the Assembly Base in Step 2 to the Table Slide of the Table Top (A) by using Short Screw (4) and fully tighten with Phillips-head screw driver (not provided).

Step 4

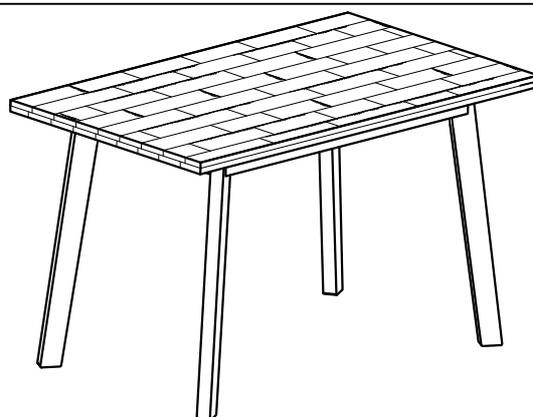

Step 4: Turn the Table to upright position, on flat surface. Tighten all Bolts and Screw with Allen Key (5) provided and Phillips-head screw driver (not provided). Assembly product is completed.

Cleaning instructions: Clean using soft cloth