ASSEMBLY 1-Person REQUIREMENTS Assembly

45 min Assembly Time

Thank you for purchasing our product!


Please refer and use this assembly instruction to assemble the product. Contact our customer service department in case there are any missing or damage parts or hardware. Replacement parts are normally shipped within 2 or 3 days.

Email: replacementparts@buylateral.com Within 30 days from delivery date

PRODUCTS PURCHASED THROUGH OUR AUTHORIZED VENDORS ONLY ARE ELIGIBLE FOR REPLACEMENT PARTS.

We appreciate your business!

THIS PRODUCT IS FOR INDOOR AND HOUSEHOLD USE ONLY - NOT FOR COMMERCIAL USE.

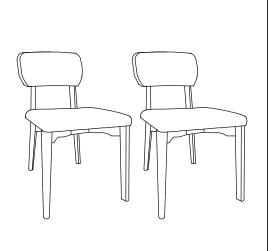

ASSEMBLY PREPARATION

- 1. Remove all packaging materials, staples and packing straps from the carton.
- 2. Refer to Parts List and Hardware List, and ensure parts and hardware are correct before assembly. Contact customer service for missing parts.
- 3. Place all wooden parts on a clean, flat and soft surface (e.g. carpet or rug) to prevent scratch and damage to parts.

SAFETY PRECAUTION

- 1. KEEP ALL HARDWARE PARTS OUT OF REACH OF CHILDREN.
- 2. DISPOSE PLASTIC PACKAGING MATERIAL IMMEDIATELY TO AVOID ANY RISK OF SUFFOCATION TO CHILDREN AND ANIMALS.

TIPS FOR ASSEMBLY

- 1. Allow sample room for assembly and assemble the product near where the product will be placed.
- 2. Assemble the product on a surface that does not scratch or damage the exterior gloss and finish of the furniture.
- 3. Identify all of the parts, hardware and quantities required for each step.
- 4. During assembly, do not over-tighten any fittings as this may cause damage.
- 5. DO NOT USE POWER TOOLS TO ASSEMBLE THIS PRODUCT.
- 6. Always place the product on a flat, level surface.
- 7. Do not sit or stand on the partially assembled product; only use the product for which it is intended.

CARE AND MAINTENANCE

- · Use a slightly damp cloth to clean the product. Do not use bleach or abrasive cleaning material.
- · Check all the fittings periodically and re-tighten as necessary. Do not use the product if any of the parts is damaged or broken.
- Never allow any kind of liquid to remain on your furniture. Absorption can cause wood to warp or delaminate.
- · Do not place hot items (e.g. hot drinks) directly onto the wood surface.
- Do not drag and/or pull the furniture.

PARTS LIST



Chair Back 2 pcs







Chair Leg-R




Cushion Seat 2 pcs



Corner Block 2 pcs



HARDWARE LIST





G JCBC Screw M6 x 70mm 12pcs Extra : 1Pc



Spring Washer M6 12pcs Extra: 1Pc



Flat washer M6 x 13 x 1.0mm

12pcs Extra : 1Pc



Allen Key M4 1 pc








JCBC/W Screw M7 x 35mm 8pcs

Extra : 1pc







Extra: 1pc




IMPROPER USE:



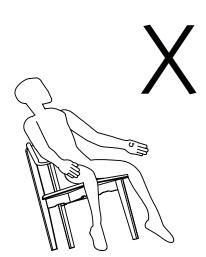


^{*}Extra hardware for spare use

STEP 1

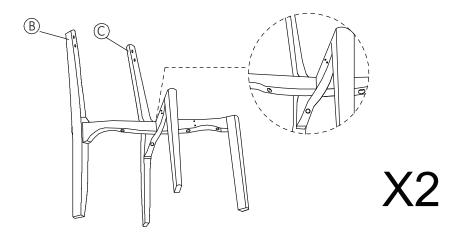


Cross Chair Leg-L (B) over Chair Leg-R (C) to mate the crossed edge half lap of each leg to form a crossed half lap joint.

STEP 2

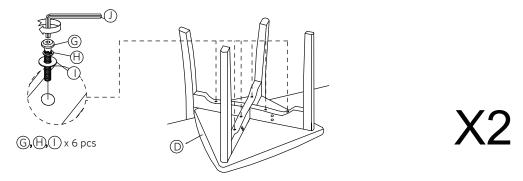


- a) Place Cushion Seat (D) bottom-side up on an elevated surface (e.g. table) as shown.
- b) Place leg assembly from STEP 1 as shown and align the screw holes on the cross rail to the screw holes on (D).
- c) Insert JCBC Screw (G) fitted with Spring Washer (H) and Flat Washer (I) into each of the screw hole.
- d) Use Allen Key (J) to drive (G) to fasten cushion to leg assembly. Do not tighten (G) completely at this time.

STEP 3

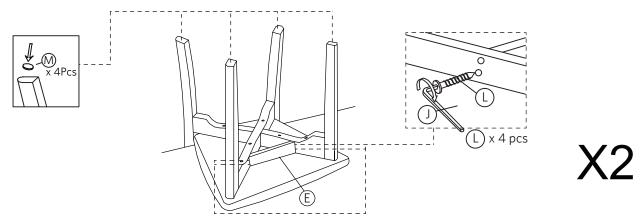


- a) Place Corner Block (E) as shown to align screw hole on (E) to screw hole on Chair Leg-L (B) & Chair Leg-R (C) and fasten (E) with JCBC/W Screw (L). Use Allen Key (J) to drive and tighten (L) completely. Fully tighten all 6 screws (G) from step 2. DO NOT OVER-TIGHTEN.
- b) Affix Felt Leg Pad (M) to each leg as shown.

STEP 4

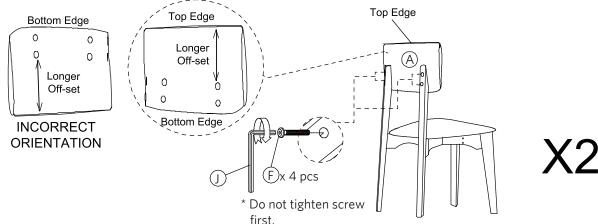

- a) Set the assembly from STEP 3 right-side up.
- b) Attach Chair Back (A) to Chair Leg-L (B) and Chair Leg-R (C).
- c) Note the orientation of Chair Back the top edge of (A) is further from the 4 screw holes (longer off-set)
- d) Use Allen Key (J) to drive JCBC Screw (F) to loosely fasten (A) to (B) and (C) at this time.

STEP 5

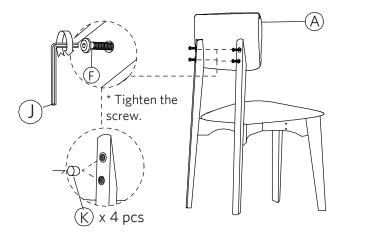

- a) Use Allen Key (J) to tighten JCBC Screw F) completely when all 4 screws are in place.
- b) Insert Wood Button (K) to conceal the screw holes.





Page 4 of 4