

ASSEMBLY INSTRUCTIONS



CAUTION

- ◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- ◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder



Safety
glasses




Phillips
screwdriver




Wrench


PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE

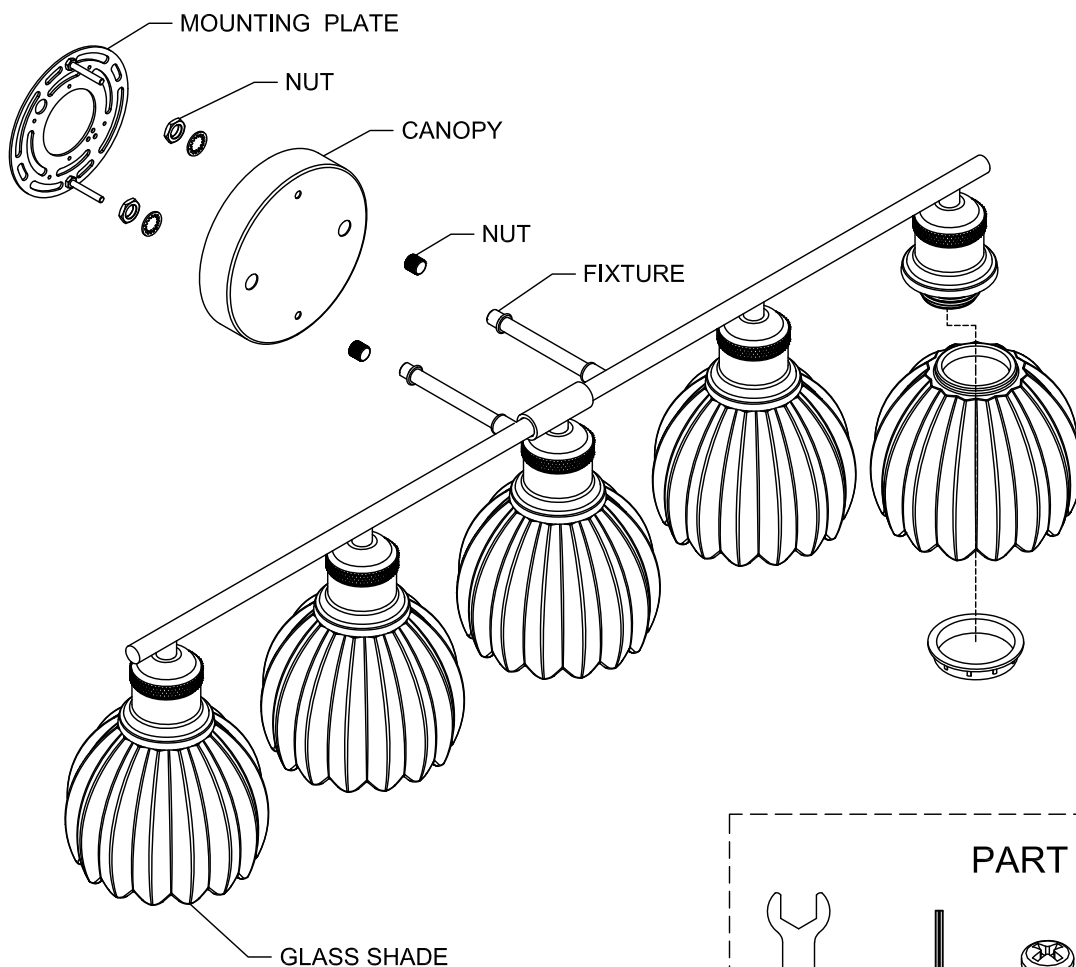


PART BAG



X1



X1




X2



X3


Step 1

Power off.

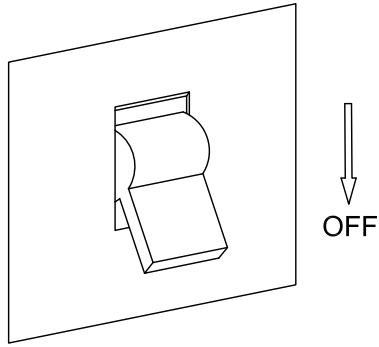


Step 2

Use the mounting screws to attach the mounting .

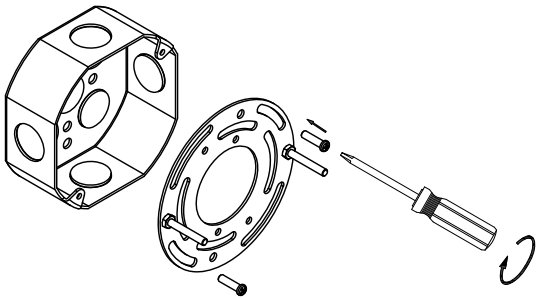


Step 3

Insert the left arm into the right arm and tighten the screw with the tools.

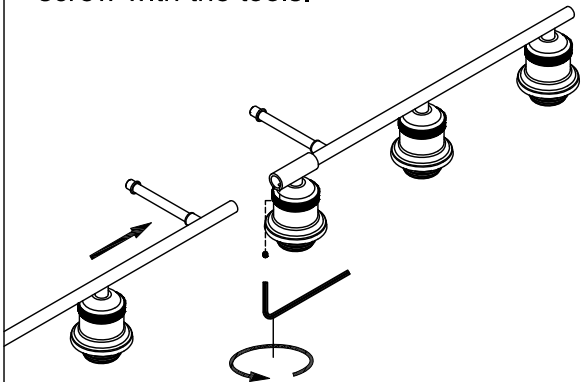

Step 4


Attach the canopy to the fixture with the nut.

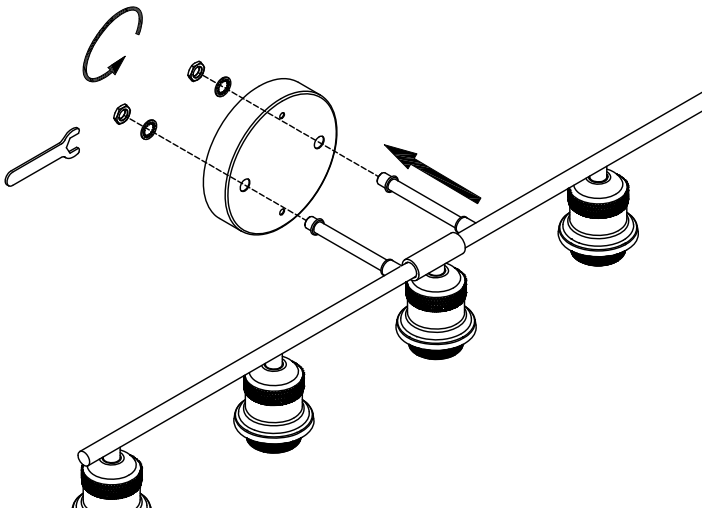

Step 5

Connect the wire.

Attach the fixture to the mounting plate with the nut.

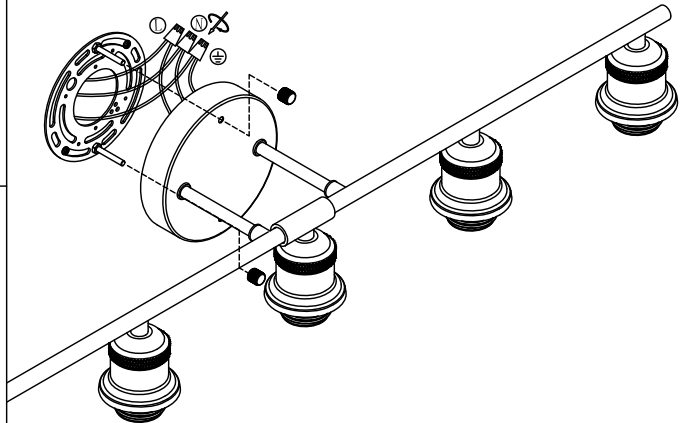


Step 6

a. Remove the socket ring from the fixture.

b. Attach the glass shade onto fixture by socket ring.

c. Install the bulb(not included).

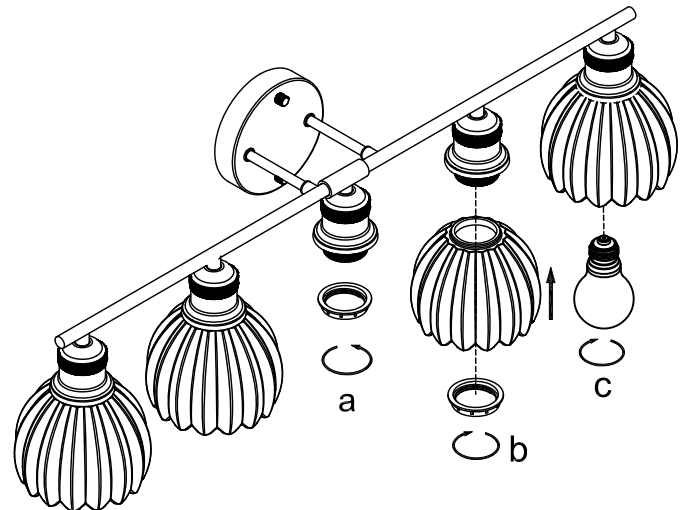

SCONCE

