




Plastic Interlocking Deck Tiles

INSTRUCTION MANUAL

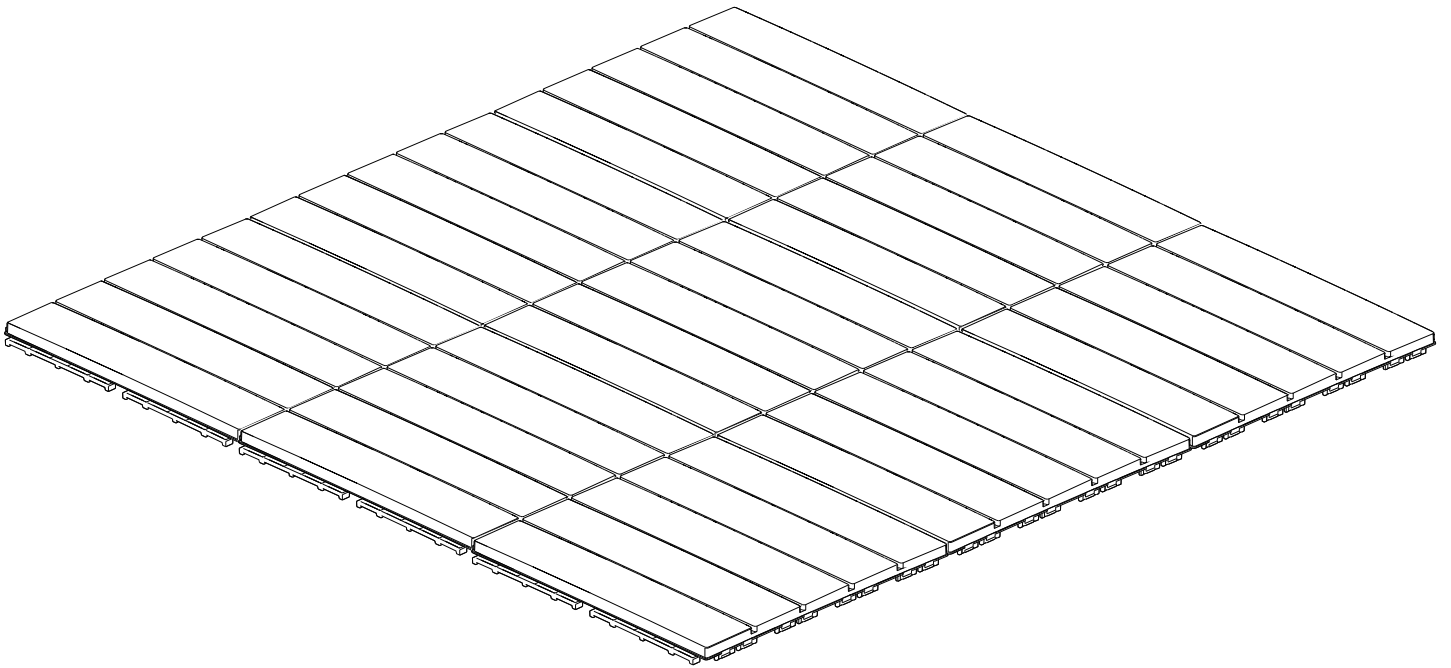

IMPORTANT WARRANTY INFORMATION

PLEASE READ CAREFULLY

**AFTER-SALES
CONTACT US**



hello@kumatool.com



+1 (804) 463-5247

If you have any problems or dissatisfaction with the product, don't hesitate to contact the after-sales team to solve the problems or express your feelings or concerns. We **DO VALUE** your voices and are all the time ready to help. All the calls, emails and messages from you will get our immediate reply within 24 hours.

All items can be returned or replaced for any reason within 30 days of the receipt as long as the item is returned in its original product package and all accessories of its original shipment are included.

About Replacement:

If there are missing parts or damages when you receive the item, you don't need to return it if you want to get a replacement. Please contact the after-sales team (**After-sales Team Email: hello@kumatool.com**
TEL: +1 (804) 463-5247) and we will provide a replacement for free.

About Returns:

1. If you need to return product, please contact the **After-sales Team** (**Email: hello@kumatool.com** **TEL: +1 (804) 463-5247**).

We will provide a **PREPAID RETURN LABEL** by E-mail.

Please include a brief description of the problem and photos of the damaged product in your email.


2. **Please Note: If the customer does not contact the after-sales team to get a return label and the customer purchases the return label by themselves, it may incur expensive return shipping charges. And the seller will not bear the fee of the customer's own purchase of the return label**
3. If the product is damaged by the customer, we can refuse to provide a prepaid return label, and the customer needs to pay for the return shipping.
4. Boxes for return shipping will not be provided by the seller. The customers are responsible for using the original shipping boxes, or purchasing new boxes when no boxes.
5. After all returned items arrive at the Return Center, please contact the After-sales team and we will fully refund back to the original payment method.

WARRANTY:

Please keep the after-sale card. If the product is damaged by non-human factors within six months, please contact our after-sales team. (After-sales Team Email: hello@kumatool.com TEL: +1 (804) 463-5247)


ASSEMBLING PROCESS

These deck tiles are designed for flat, solid surfaces like concrete, cement, or terrazzo. For uneven ground such as sand or grass, proper surface preparation - including leveling and compacting - is required before installation.

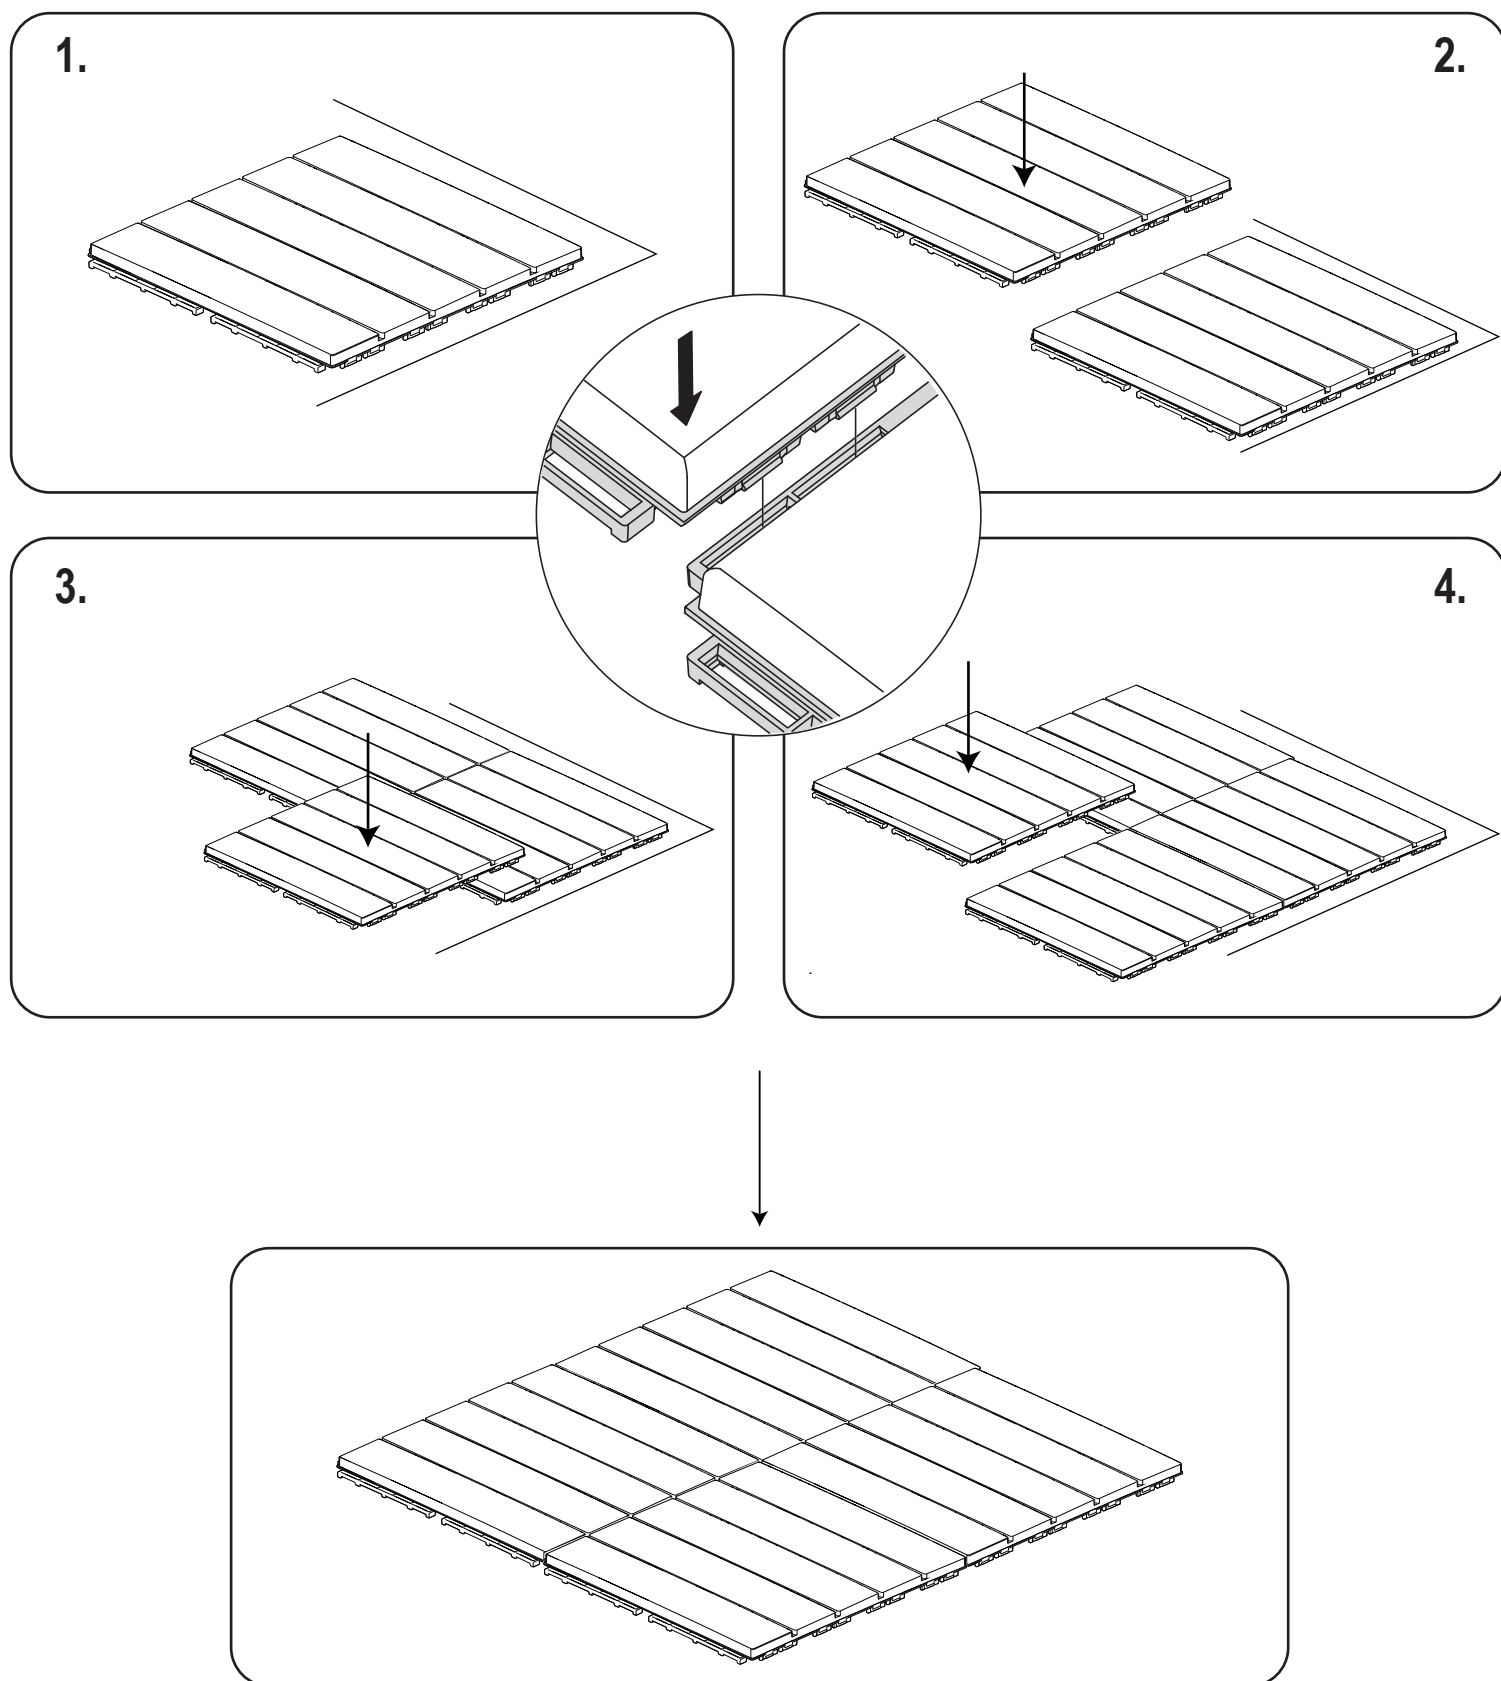


How to fill or decorate the edges?


1. Fill the edges with decorative pebbles or glass stones for a neat, finished look.

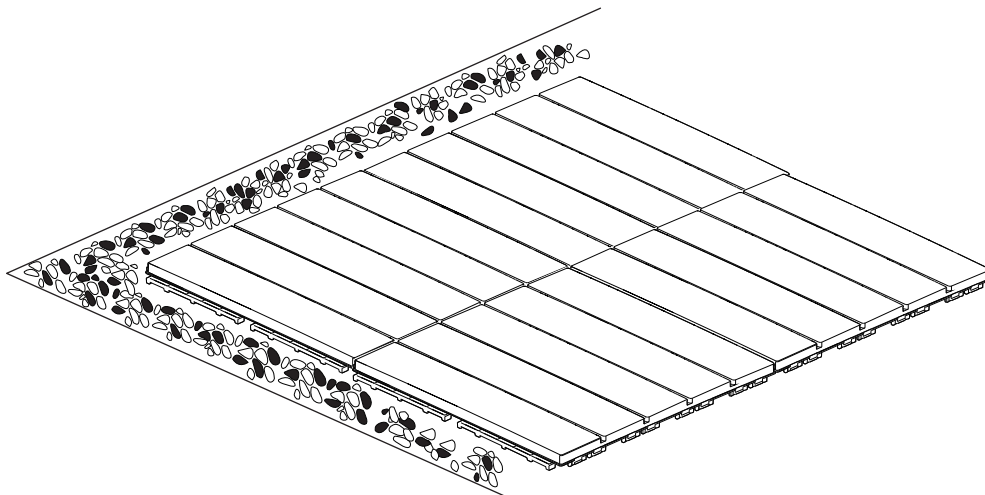


2. To fit deck tiles against walls or corners, trim the interlocking tabs from the relevant edges with a utility knife.

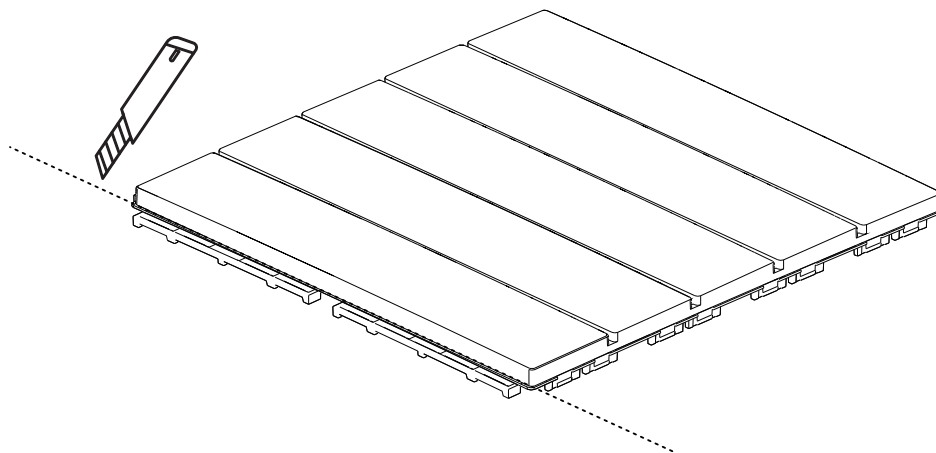

3. Cut the tiles to the required size and shape using tools such as a circular saw or electric saw. Always wear protective gloves and follow proper safety precautions during cutting.

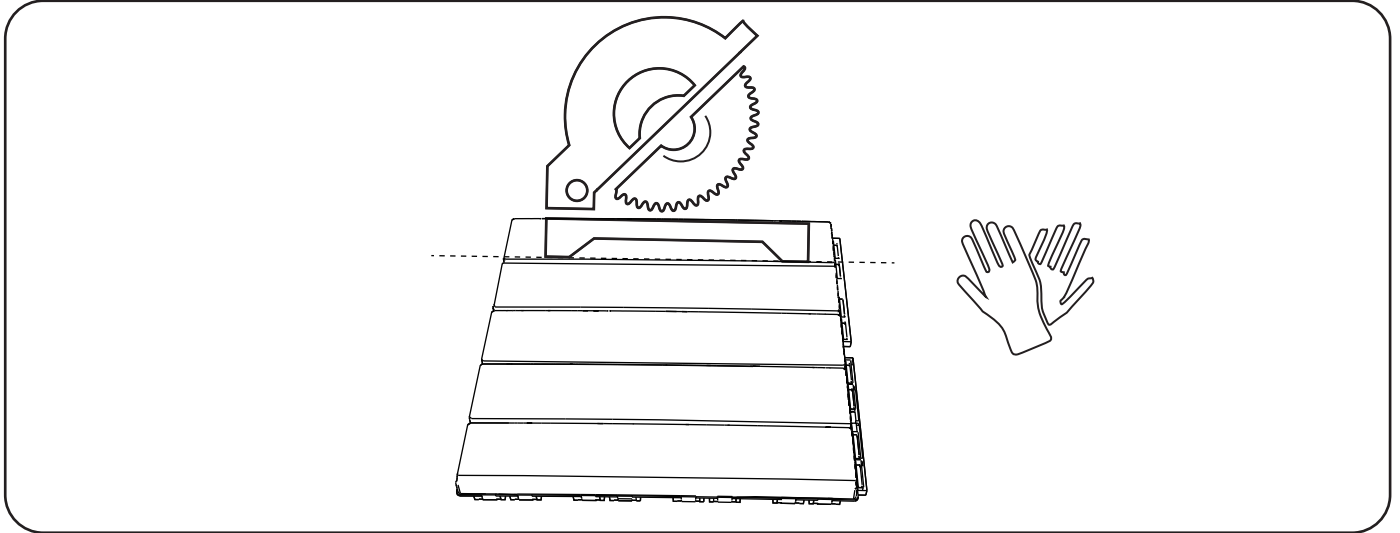

⚠ Note: The sun is strong in summer, and the deck can get very hot under direct sunlight. Do not touch it directly.

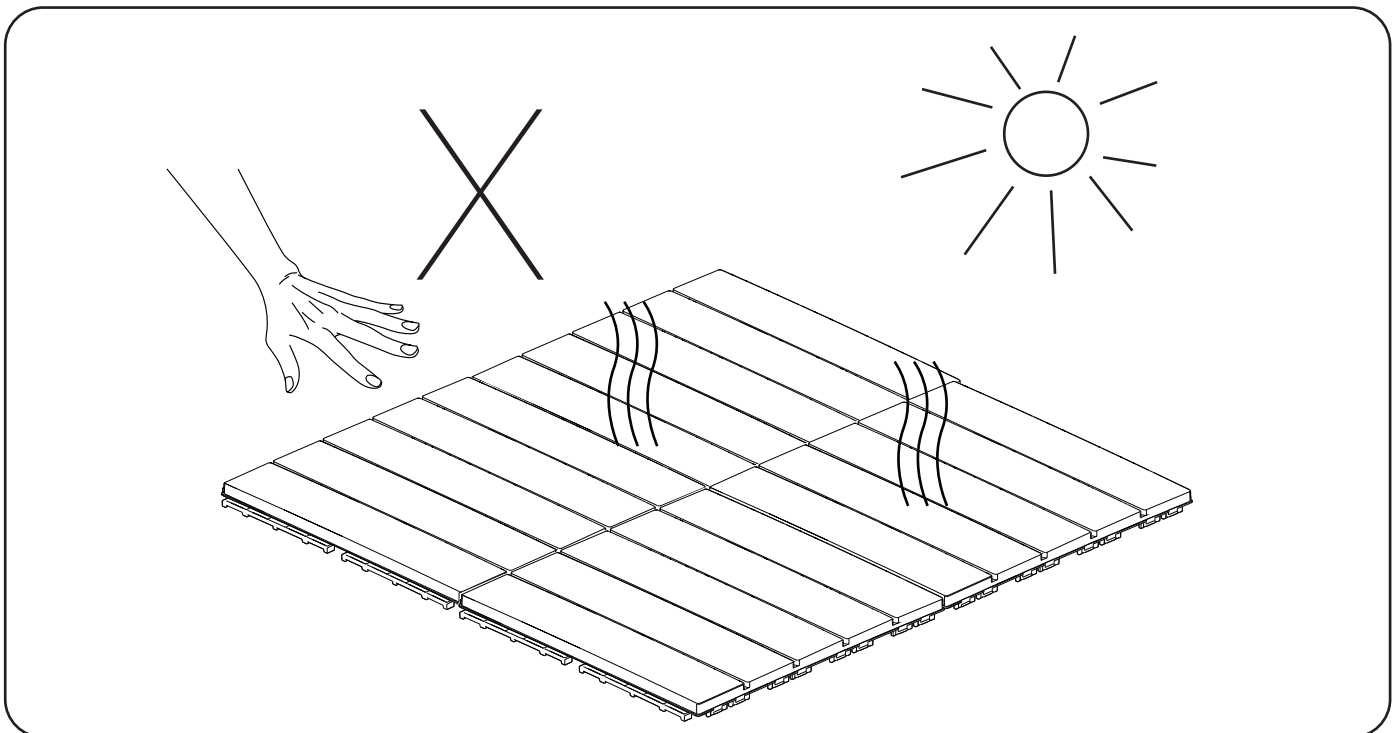

How to clean your deck?

- 1. Daily cleaning: Sweep away dust and fallen leaves with a soft-bristled broom.
- 2. Deep cleaning: Gently scrub the deck tiles with a soft brush dipped in a mild cleaning solution, then rinse thoroughly with a low-pressure water hose. Allow the tiles to air dry after cleaning.
- 3. Choose a cleaner suitable for plastic materials. Do not use cleaners containing strong acids or alkalis, as these may damage the plastic deck tiles.

How to care for your deck?

- 1. Do not install deck tiles in areas where water tends to collect, such as low spots after heavy rain, as this prevents water from draining away under the tiles.
- 2. Regularly remove dust, dirt, and leaves from the surface and gaps between the deck tiles to maintain proper drainage.
- 3. Avoid placing flowerpots or planters directly on the deck tiles, as moisture may cause staining. Use a plant stand or tray to allow air circulation and prevent direct contact.
- 4. When not in use, store the tiles in a dry, well-ventilated area, away from direct sunlight or extreme heat, to prevent UV damage and extend their lifespan.