


ASSEMBLY INSTRUCTIONS

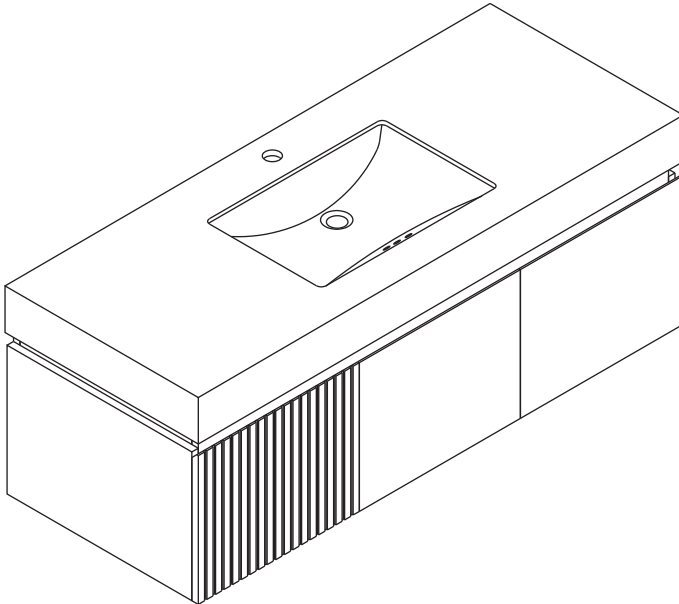


Your order will be shipped in multiple packages, and delivery times may vary.
We appreciate your patience and understanding.

Notice:


- 1. Follow the installation instructions. Please confirm all accessories are preset before installation.
- 2. Do not fully tighten the screws during initial assembly. Fully tighten screws only once all pieces which are correctly assembled.
- 3. If you encounter any problems during installation, please contact our customer service.
- 4. Please unbox the item from the side with an open-label and put a carpet on the floor to avoid scratching it.



Recommended installers : 2



Put a carpet on the floor
before unpacking






30-60min

Estimate installation time:
30 minutes


Item no.	Reference Image	Qty
A		x1
B		x1
1		x4
2		x4

Item no.	Reference Image	Qty
3		x4
4		x6

1

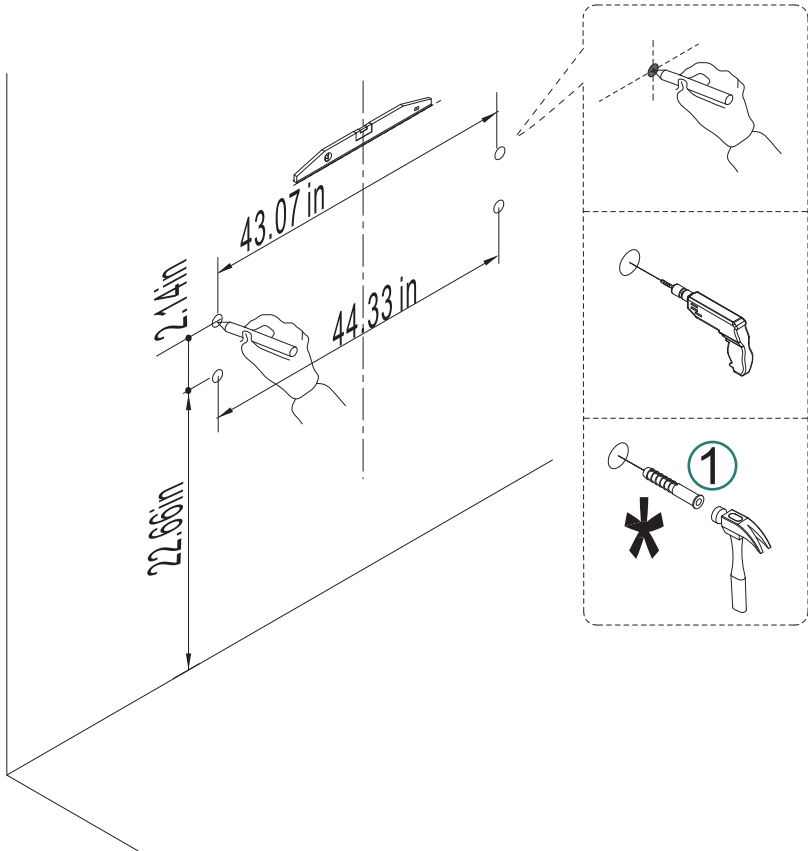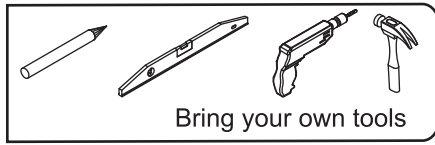


2






⑧ 1pc





② 4pcs



③ 4pcs

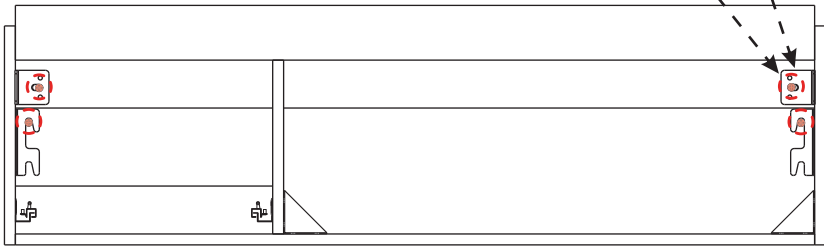


3

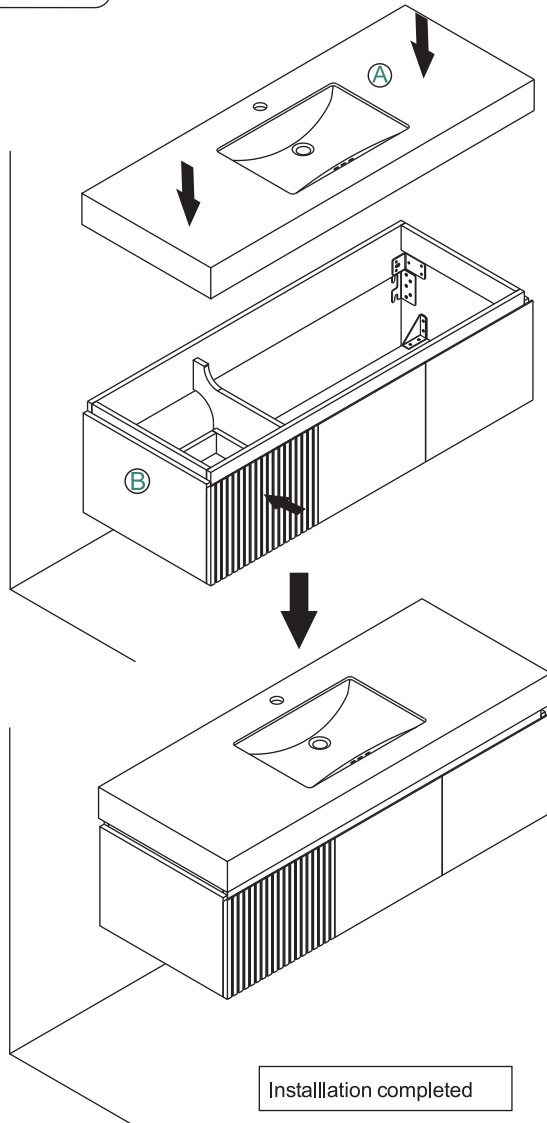

4

Installation of drain assembly





Turn the screw at the bottom of the guide rail counterclockwise!

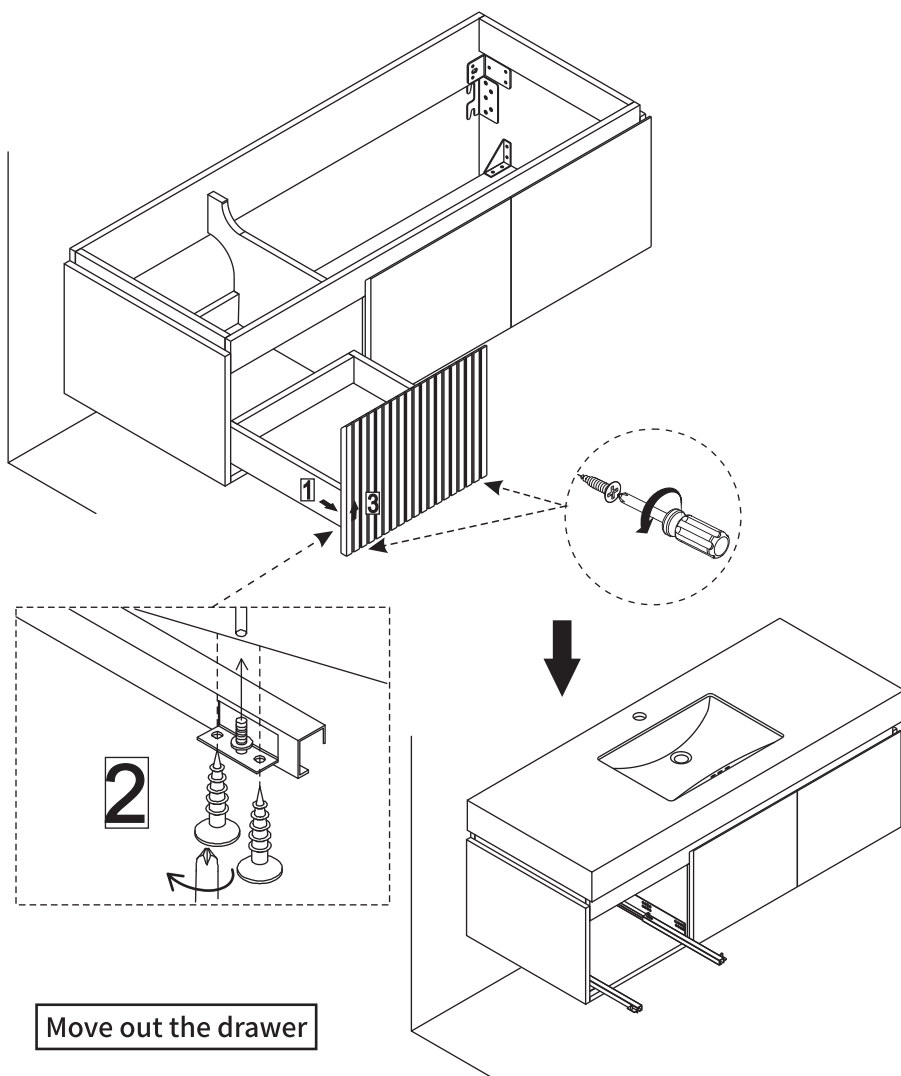

5



④ 6pcs

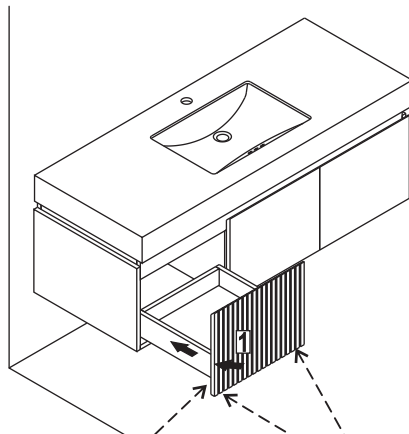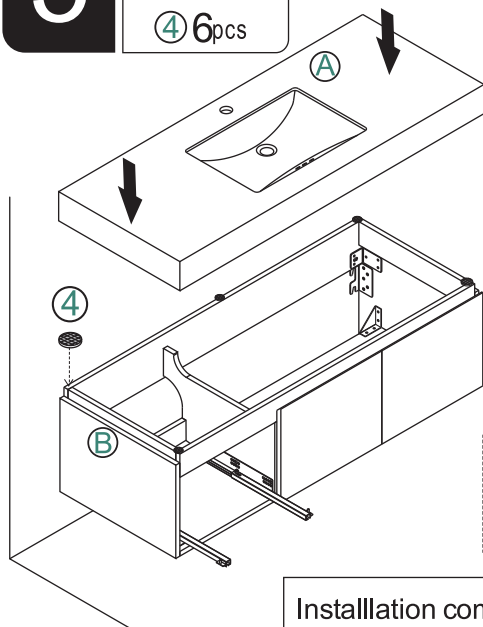

Installation completed

Installation of drain assembly

Pop-up Waste Installation


STEP 1

Install Pop-up Waste with over flow.

STEP 2


Connect the drain pipe.

This product does not include faucet and drainage accessories. The content on this page is provided as installation suggestions only. Please carry out the installation according to the requirements of the product you actually purchased.

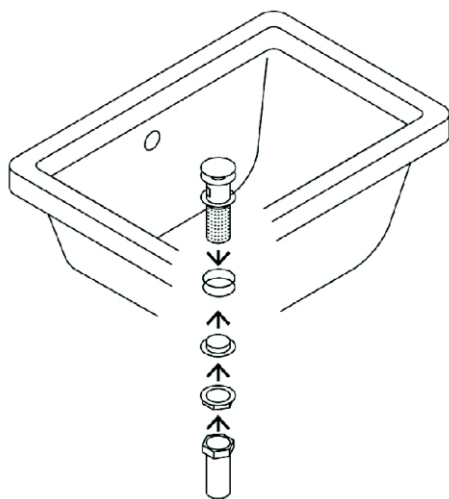


side adjustment

Side adjustment of the door is made by using the indicated screw.

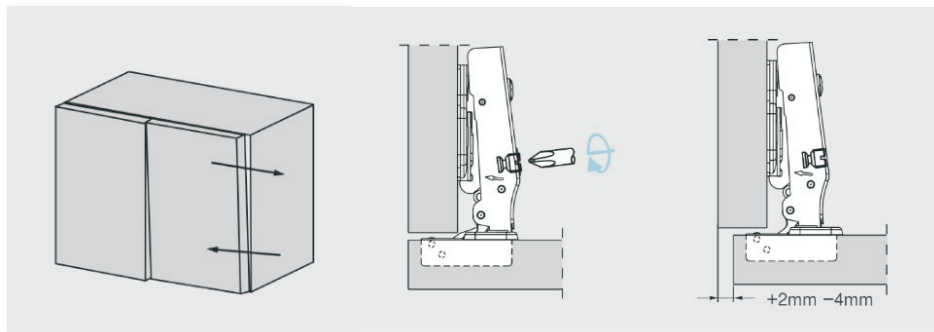

Depth Adjustment

Depth adjustment is made without loosening any screw. The door can be moved in or out by rotating the cam adjuster on the hinge arm.

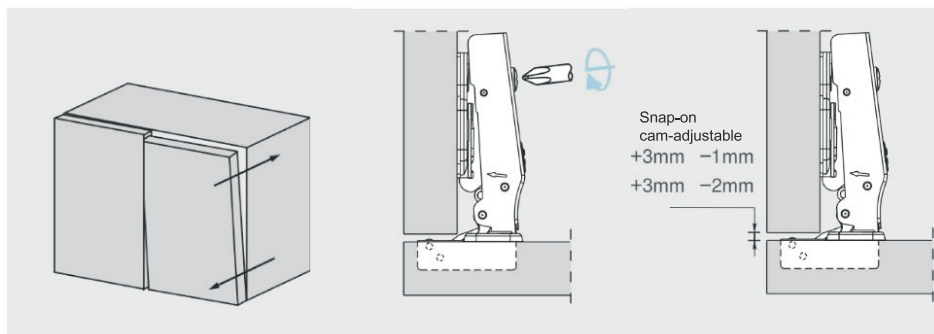

Height Adjustment

By loosening the two fixing screws to allow the mounting plate to slide up or down, the door can be adjusted vertically by $\pm 2\text{mm}$. After retightening the screws, the Depth adjustment is done.

