



## INSTRUCTION MANUAL

**NOTICE:**

IMPORTANT, KEEP FOR FUTURE REFERENCE PLEASE READ CAREFULLY.

IF YOU HAVE ANY CONCERNS ABOUT THE PRODUCT, PLEASE FEEL FREE TO CONTACT US BEFORE YOU LEAVE A REVIEW.

---


**CAUTION:**

1. The installation requests a professional electrician to operate. Please make sure the installation environment ventilating and dry.
2. Wearing gloves during installation to prevent yourself from scratching by the fixtures. or electric wire. Be sure the power has been turned off before operation.
3. Make sure the fixture is away from corrosive chemicals and air such as acid and alkali. Clean the fixture by wiping it with a dry rag.
4. Do not touch the bulb when the fixture is turned on or look directly at the lit bulb. Keep flammable materials away from the lit bulb.
5. To reduce the risk of fire, electrical shock, and personal injury, always turn off and unplug the fixture and allow it to cool before replacing the light bulb.
6. US standard: Live wire (L) is **black**, neutral wire (N) is **white**, and the ground wire is **yellow**.


**STEP-BY-STEP INSTALLATION (refer to fig. 1)**

1. Shut off the power at the circuit breaker and remove the existing fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts in a clear area, Be careful not to lose any small parts necessary for installation.
3. To finish the structure of the lamp body, it need to fix the metal tube on the metal ring with screws.
4. Remove the mounting screw from the light fixture.
5. Secure mounting bracket to the junction box using junction box screw ( 2 screws ) .
6. Connect the wire (N) from the light fixture to the **white** supply wire (N) from the junction box using a wire connector. Connect the wire (L) from the light fixture to the **black** supply wire (L) from the junction box using a wire connector.
7. After wires are connected, tuck them carefully inside the junction box.
8. Fix the canopy with four decorative nuts.
9. Add the **E12** bulbs, and turn on the power, check whether the light fixture works normally or not.
10. Ensure the light fixture work normally, then hang the A crystal and B crystal with butterfly clips.

fig 1

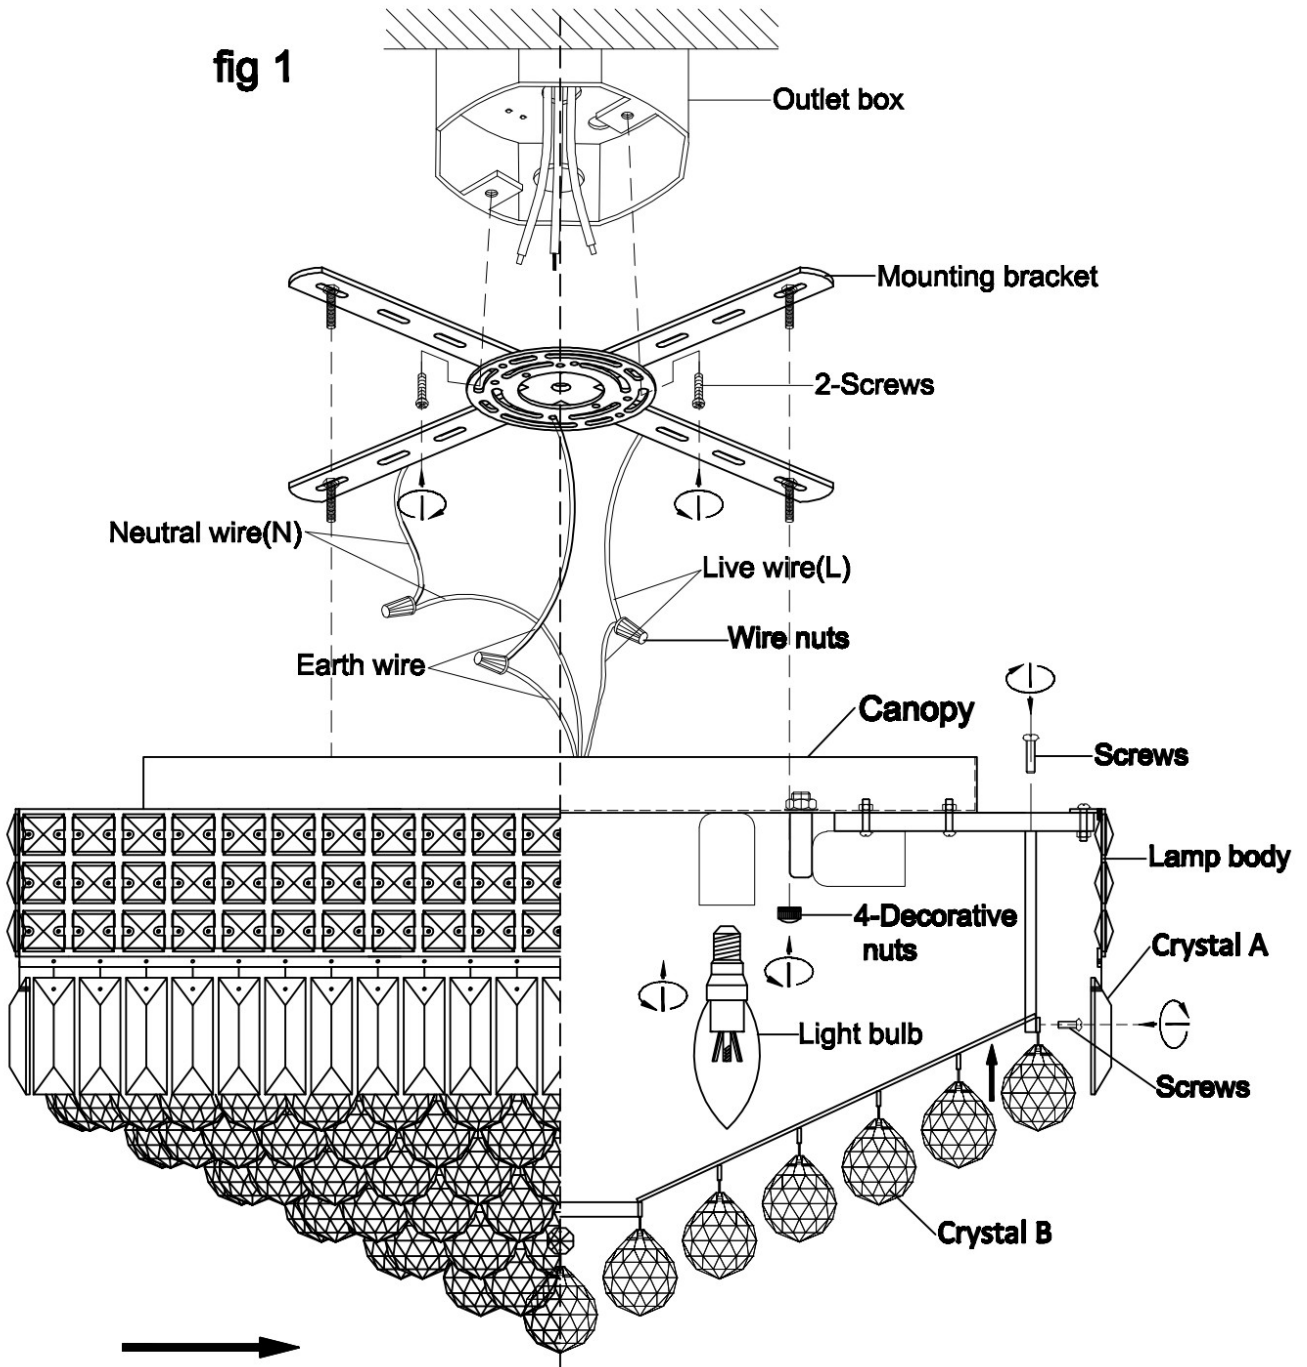

- 
- A 63mm/74PCS
  - B 40mm/127PCS

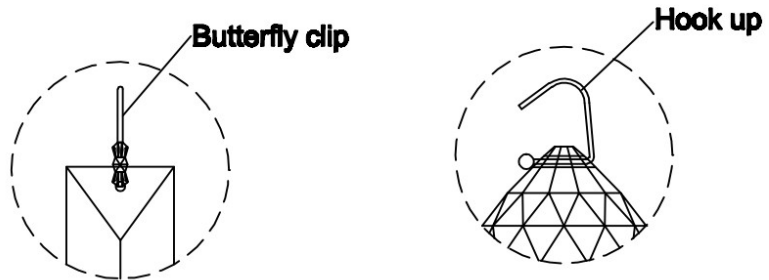

**Package List:**

Lamp body	1	PCS
Crystal A	4	BAGS
Crystal B	127	PCS
Metal ring	1	PCS
110mm Metal tube	4	PCS
Butterfly clips	1	BAG
Hook up	1	BAG
Mounting bracket	1	PCS
Decorative nuts	4	PCS
Accessories Bag	1	BAG
Installation Instructions	1	PCS

✂The package include extra crystal pieces. The Number of Spare Crystals :

22mm Crystal	6	PCS
14mm Crystal	2	PCS
22*63mm Crystal	6	PCS
40mm Crystal	5	PCS

This product compatible with **E12** bulbs (Not included in the package).

