1.Turn off the power.

2.Unscrew the loop (E) on the mounting plate (D).



Accessories:

3.Opening the hanging chain (H), then loose two ends of the K/D Ring (G) and the K/D Ring (G) is still on both ends of the hanging chain (H).

4. Untie the wires and then the wires go through the tube (K), twist the tube (K) downward tightly to the lamp body (L).



5.Open the lamp frame(J) into 6 equal parts, wires go through the middle of the lamp frame (J) and the hanging ring (I) , then twist the lamp body (L) upward on the lamp frame(J) and the hanging ring (I) twists tightly on the lamp frame (J).



6.Wires go through the hanging chain (H), the loope (E), the canopy (F) and the mounting plate (D), pull out the wire. Then tighten the two K/D ring (G) (up and down) to the hanging ring (I) and mountintg plate(D).

7.Lift the whole lamp upward, install the mounting plate (D) with two screws (B) on the junction box (A), fix the screws tightly.

8.Positive and negative poles, the ground wire should all be connected to the wires correspondingly, and the electric tape wraps the wires and the wiring caps (C).



9.Screw tightly the canopy (F) with the loop (E) and hang up the whole lamp.

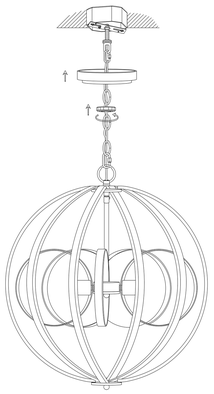

10. Install the bulbs(M)(Not included).



E26 6*MAX 60W

11. Finished, turn on the light.



A Quantity:0 pc Junction Box

B Quantity:2 pc Screw

C Quantity:3 pc Wiring Cap

D Quantity:1 pc Mounting Plate

E Quantity:1 pc Loop

F Quantity:1 pc Canopy

G Quantity:2 pc K/D RING

H Quantity:1 pc Hanging Chain

I Quantity:1 pc Hanging Ring



J Quantity:1 pc Lamp Frame

K Quantity:1 pc Tube



L Quantity:1 pc Lamp Body

M Quantity:0 pc Bulb

Notice:

This light fixture shoud be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect items and contents carefully. If any damage or defect is found, do not install it.