

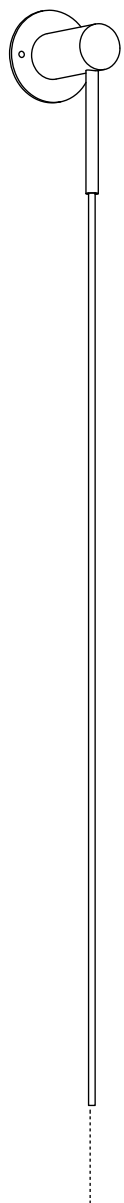


WS-ZGBLQ127-5 Installation

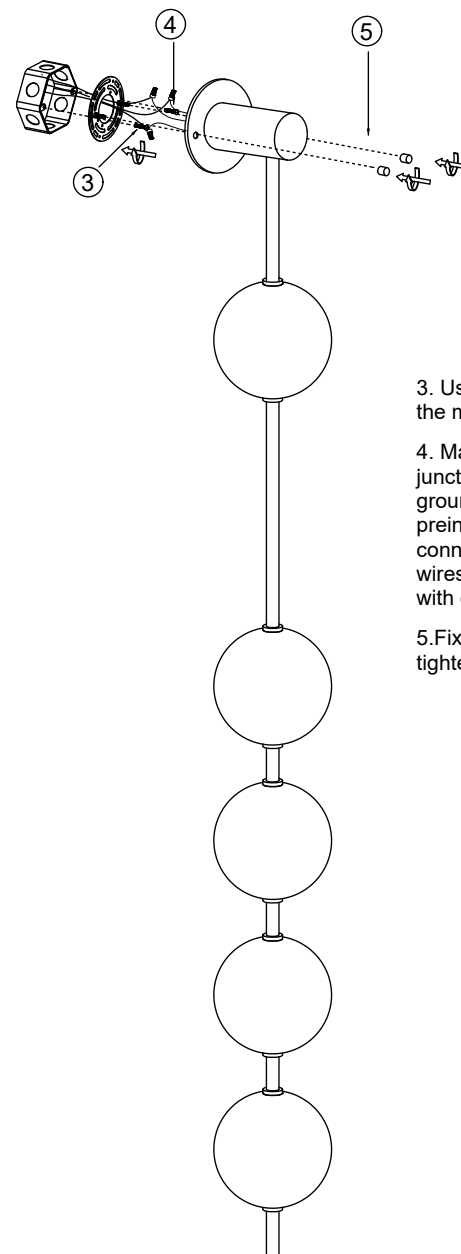

1. Thread the glass ball and the straight tube through the silicon strip in turn
- 1
 - 2
 - 3
 - 4
 - 5
 - 6
 - 7
 - 8
 - 9
 - 10

2. Tighten the fixture on the metal rod.

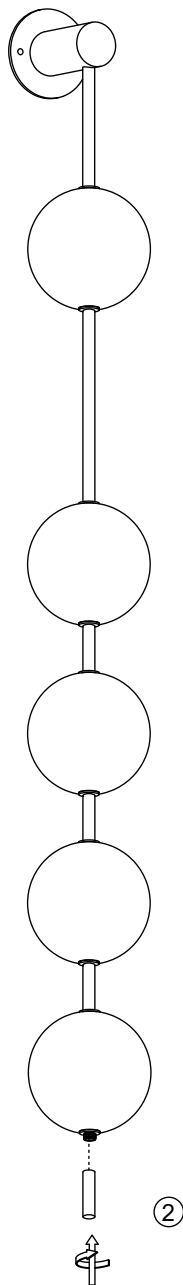

3. Use the mounting screws to attach the mounting unit to the junction box
4. Make the electrical connection from the junction box to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied wire nuts. Secure with electrical tape
5. Fix the fixture to the mounting unit and tighten it with the cover nut