
outline drawing:




model:

Technical data: Power supply voltage 110-120V, bulb type E12Max40Wx6PCS (not included)

CAUTION

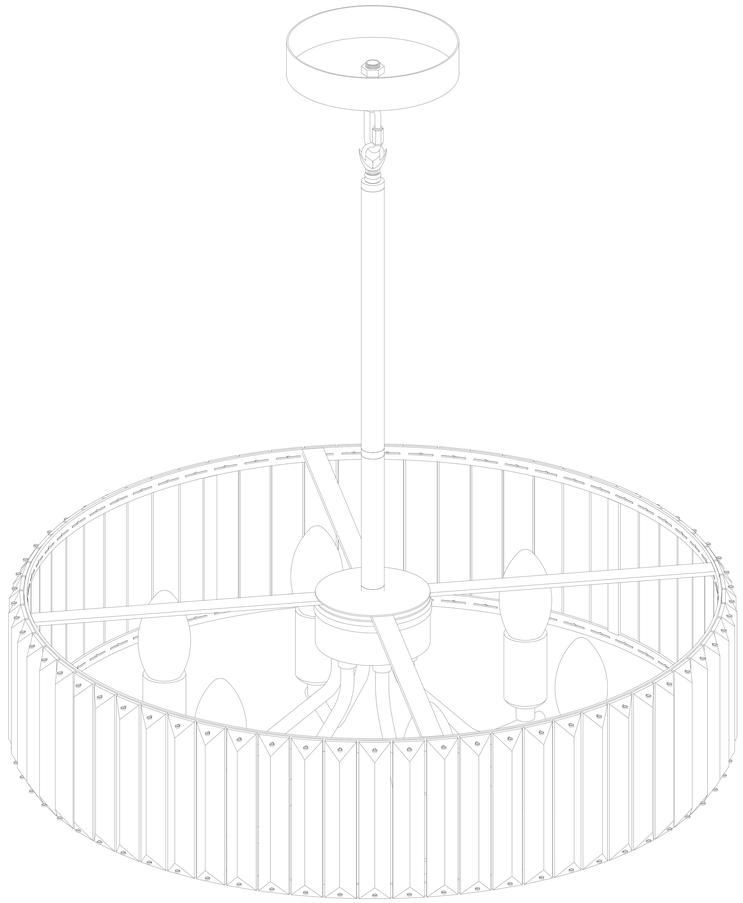


- Before installing the lighting fixtures, please check the insulation of the wires for any cuts, wear, or possible damage during transportation。If the wires are defective, do not attempt installation 。
- In some countries, electrical installation work can only be carried out by authorized electrical contractors。Please contact the local power department for advice。




IMPORTANT Before starting the installation work, please make sure to cut off the power supply to the circuit。

IMPORTANT Keep children away from the installation process 。

Required tools (not included):



Ladder



Phillips screwdriver



pincers

Required tools (including):



Hex Wrench



glove

The hardware kit provides:



Closed loop




mounting screw



Hanging plate screws



CONNECTORS



tray



Installation board

Large and Medium Pipe-B

Large and Medium Pipe-A



Connector




Short connector




Middle tube

carabiner




Crystal rack

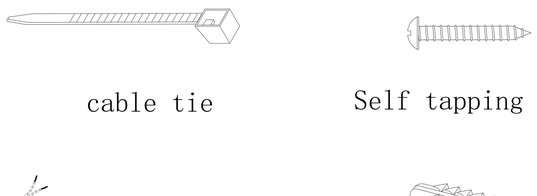


cable tie

Self tapping screws




Gecko rubber stopper



Lamp, Lamp Ancient

- The components displayed on each lamp may vary slightly


Step 1

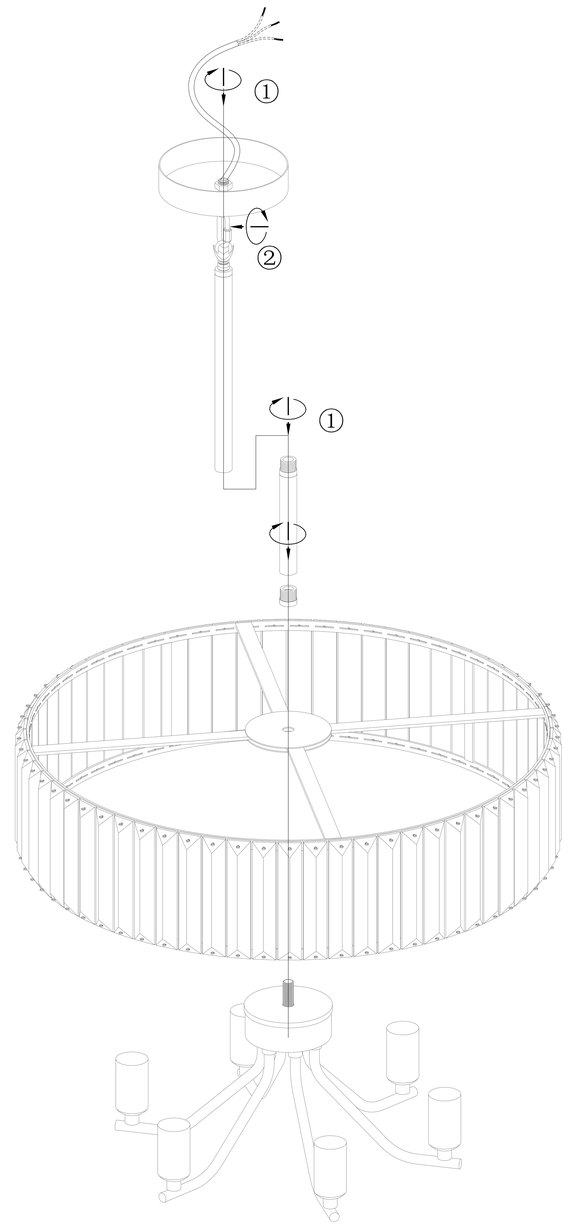

① Thread the lights and lanterns through the middle hole on the crystal frame and connect them securely to the large and medium-sized tube-A, tube-B, connectors, vertical hooks, and plates。

② Lock the safety of the vertical hook securely。

Step 2

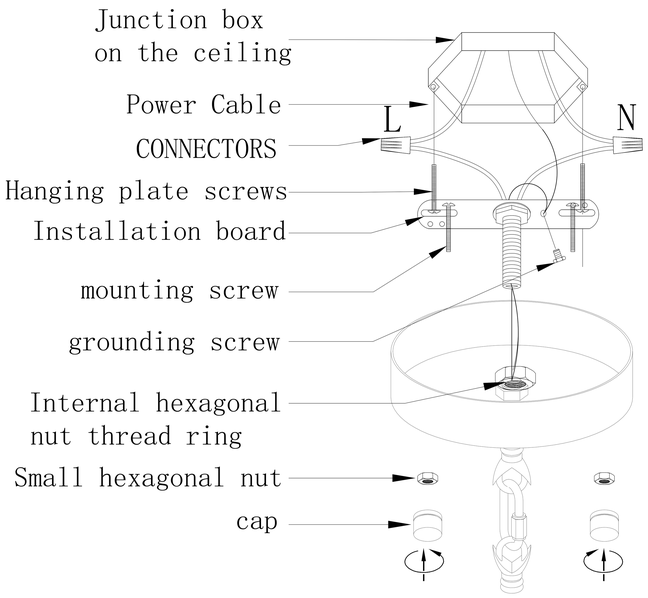

① Thread all the wires through the canopy and installation kit。

② Connect the power cable with two cable connectors。


③ Connect the grounding wire and tighten it with the grounding screw。


④ Install the fixing screws into the mounting plate, install the installation unit under the junction box, and tighten with two mounting screws。

⑤ Fix the canopy in place using a suspension ring. Tighten the screw ring and hex nut with a wrench to tighten the hex nut。


⑥ Tighten the fixing screws on the rain shelter holes。

⑦ Tighten the cap tightly。

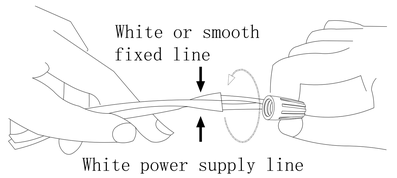

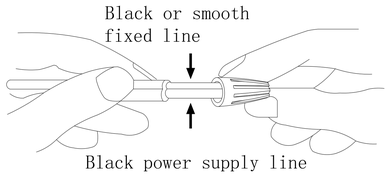


Connect the black or red wire (with an L sticker on the wire) to:	Connect the white wire (with N stickers on the wire) to:
black	white
Parallel lines - pti&l (circular and smooth)	Parallel lines - spri&l (square and ridge shaped)
Transparent, brown, gold or black (without tracer)	Transparent, brown, gold or black (with tracer)
Copper core insulated wire (excluding GREEN)	Silver conductor insulated wire (excluding GREEN)

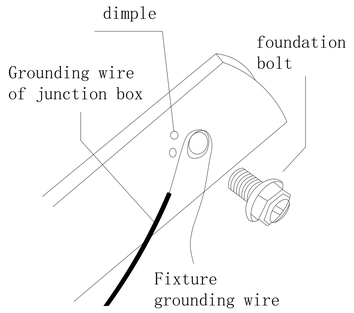

Step 3

Kind reminder:Before installing the crystal, please clean it thoroughly 。

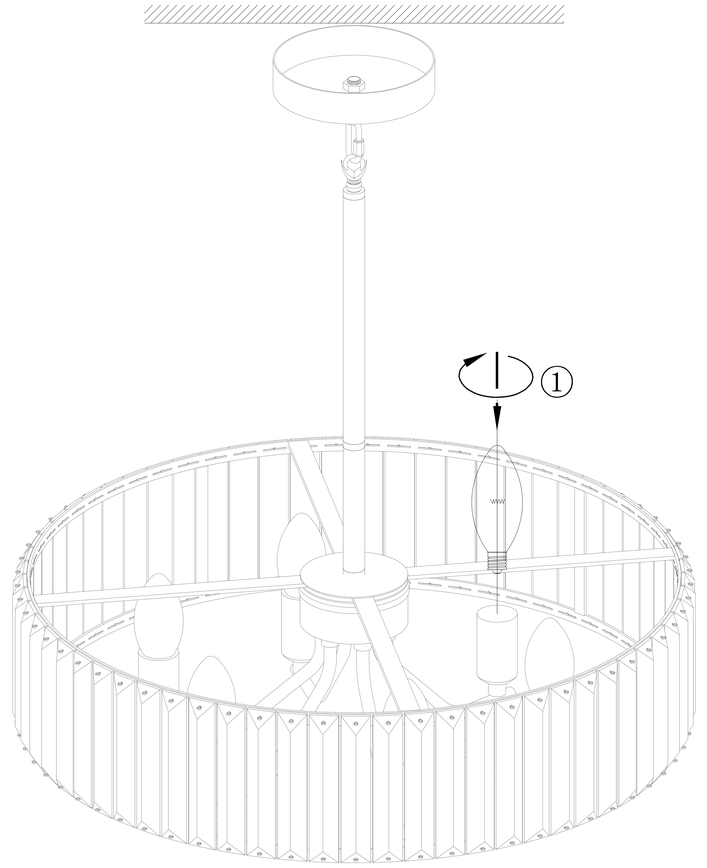

① Tighten the light bulb (E12 maximum 40W, not included)。