










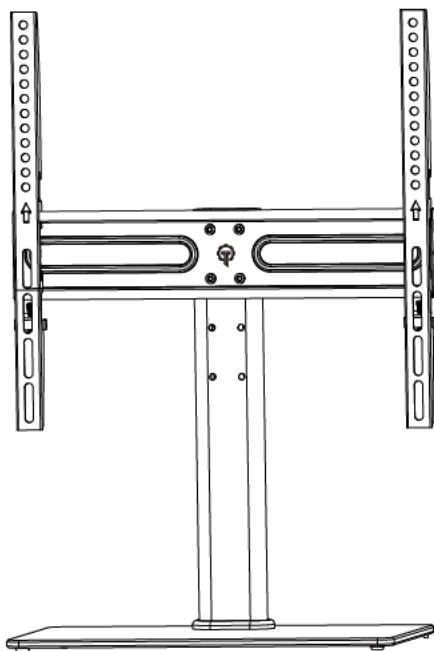
























TV Stand



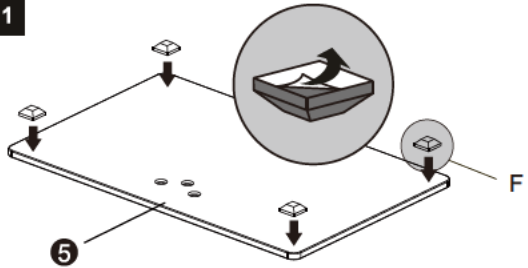




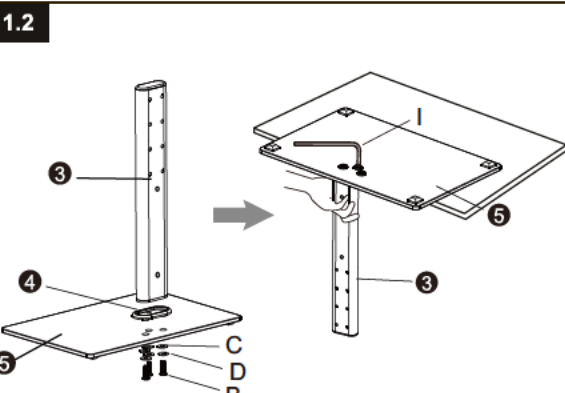


Component Checklist

 1 (x1) TV Plate		 2 (x2) Monitor Brackets		 M4X30 TV1 X4	 M6X16 TV2 X4	 M6X35 TV2 X4	 M8X25 TV3 X4
 3 (x1) Support Pillar		 4 (x1) Plastic Cover		 M6X50 TV4 X4	 Washer TV5 X4	 SP1 TV6 X8	 SP2 TV7 X8
 5 (x1) Tempered Glass							
 M6(x4) A	 M6x25(x3) B	 M6x18x1.5 plastic washer(x3) C	 M6x16x1.5(x7) D	 M6x40(x4) E			
 Rubber Foot(x4) F	 Safety Lock(x2) G	 wire clip(x2) H	 Allen Key 4mm(x1) I	 Wrench 10(x1) I			


STEP 1 Connecting the Support Pillar 3 to Tempered Glass 5

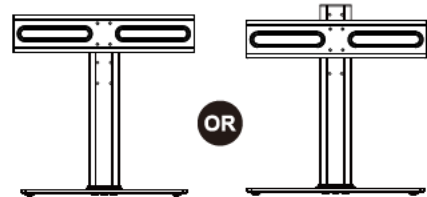5		x 1	1.1 
3		x 1	
4		x 1	
C		x 3	
D		x 3	1.2 
B		x 3	
F		x 4	
I		x 1	

STEP 2 Connecting the TV Plates 1 to Support Pillar 3

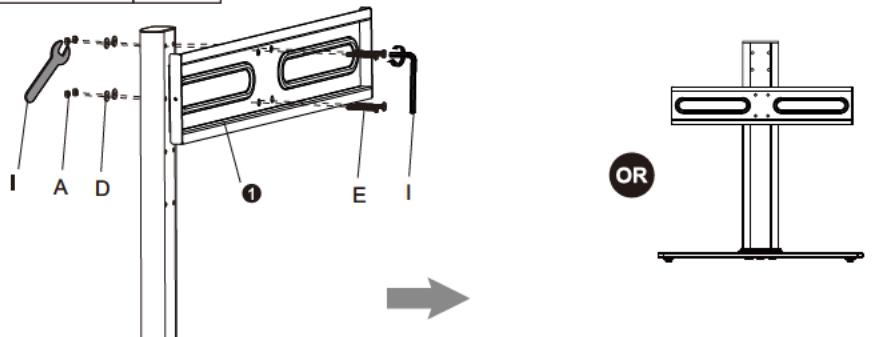1		x 1	I		x 1	
E		x 4				
A		x 4				
D		x 4				
I		x 1				

STEP 3 Check TV Screws




Measure the distance between the holes located at the back of your TV (these measures may form the shape of a square, or a rectangle) and check that these taken measures are within the VESA(*) range for this wall mount. (*) VESA: International standard established by the TV manufacturers used to determine if LCD / LED TVs are compatible with wall mounts.

75 mm ≈ 2 7/8 in 100 mm ≈ 4 in
200 mm ≈ 7 7/8 in 300 mm ≈ 11 3/4 in
400 mm ≈ 15 3/4 in

Check TV screws

Please select the proper screw length for your TV by hand tightening to check your flat panel thread depth.



When attaching brackets to the flat screen, be careful not to over tighten screws and be sure that screws do not bottom out in the mounting holes.



Too Short



Too Long



Correct



Correct

STEP 4 Mounting the Monitor Bracket to a TV

2

x 2

TV1

M4X30

x 4

TV2

M6X16

x 4

TV2

M6X35

x 4

TV3

M8X25

x 4

TV4

M8X50

x 4

TV5

Washer

x 4

TV6

M8x2.5 Spacer

x 8

TV7


M8x5 Spacer

x 8

TV8

M8x10 Spacer

x 8

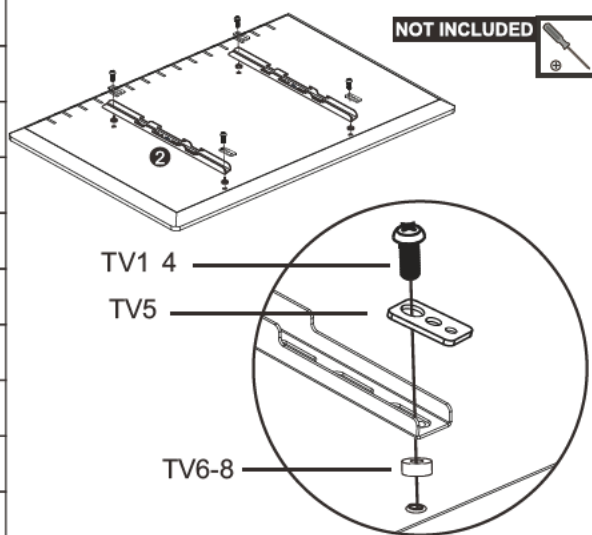


NOT INCLUDED



First, make sure the diameter of the bolt (TV1 4) fits your TV. Then, please see the diagram above. You will need to thread the bolt into the TV using the correct washer (TV5) and spacer (TV6-8) if necessary. Please make sure the monitor brackets are vertically centered and level with each other

STEP 5 Attaching TV to TV Plate

5.1

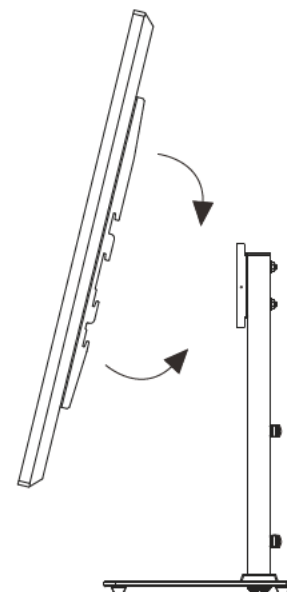


5.2

G



x2

NOT INCLUDED

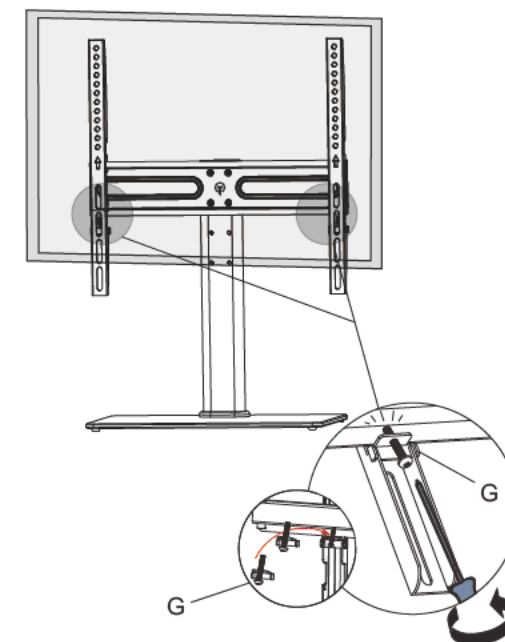

H



x2

