


CARTIER – model: LED710

LEDme® Track Luminaire

WAC LIGHTING

Responsible Lighting®

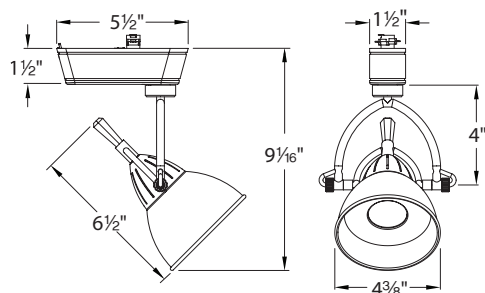

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

High-level craftsmanship and old world styling are combined with the flexibility and performance of modern track lighting.

Precision engineering, hand finishes and onyx crystal details make this fixture perfect for upscale spaces with sophisticated taste.

For use with WAC Lighting's 120V Track system and compatible with other manufacturer's track (consult factory for specific brands).

FEATURES

- Title 24 California Energy Commission Compliant (90 CRI versions)
- Smooth and continuous ELV dimming
- ANSI Compliant Warm/Neutral LED Bins for a finer color consistency
- Replaceable LED module and reflectors
- 60,000 hour rated life
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Spun aluminum body with black onyx crystal aiming finial and clear lens.

Driver: Input voltage: 120VAC/60Hz; High power factor >0.9
Max Load: 10W

Light Source: 10W Cree Multi-chip LED.

Total power consumption of 14W with included driver.

Dimming: May be dimmed to 8% with electronic low voltage (ELV) dimmer.

Finish: White powder coat inside/electroplated outside.
Available in Antique Bronze (AB) and Antique Nickel (AN).

Standards: UL & CUL Listed. Meets Energy Star Requirements.

FIXTURE PERFORMANCE

Model #	Beam	Color Temp	Watts	Lumens	Efficacy	CBCP	CRI
LED710S-927	20°	2700K	14.5W	745	51 Lm/W	3556	90
LED710F-927	32°	2700K	14.5W	690	48 Lm/W	1456	90
LED710S-27	20°	2700K	14.5W	900	62 Lm/W	4220	80
LED710F-27	32°	2700K	14.5W	895	62 Lm/W	1957	80
LED710S-9W	20°	3000K	14.5W	765	53 Lm/W	3650	90
LED710F-9W	32°	3000K	14.5W	690	48 Lm/W	1462	90
LED710S-WW	20°	3000K	14.5W	1000	69 Lm/W	4659	80
LED710F-WW	32°	3000K	14.5W	935	64 Lm/W	1954	80
LED710S-35	20°	3500K	14.5W	990	68 Lm/W	4512	80
LED710F-35	32°	3500K	14.5W	935	64 Lm/W	2114	80
LED710S-CW	20°	4000K	14.5W	1035	71 Lm/W	4811	80
LED710F-CW	32°	4000K	14.5W	940	65 Lm/W	2006	80

ORDER NUMBER

System	Model #	Beam Spread	Color Temp	Finish
H H Track L L Track J J Track	LED710	S 20° F 32°	927 2700K (90 CRI) 27 2700K 9W 3000K (90 CRI) WW 3000K 35 3500K CW 4000K	AB Antique Bronze AN Antique Nickel

- **LED710** - -

Example: **L-LED710S-WW-AN**

REPLACEMENT LED MODULE

BXRC-27G1000	2700K (90 CRI)
BXRC-27E1000	2700K
BXRC-30G1000	3000K (90 CRI)
BXRC-30E1000	3000K
BXRC-35E1000	3500K
BXRC-40E1000	4000K

REPLACEMENT REFLECTOR

RF-S	20°
RF-F	40°

WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585


CARTIER – model: LED710S

Photometrics


WAC LIGHTING

Responsible Lighting®

20° Beam Angle - 3000K (85 CRI)

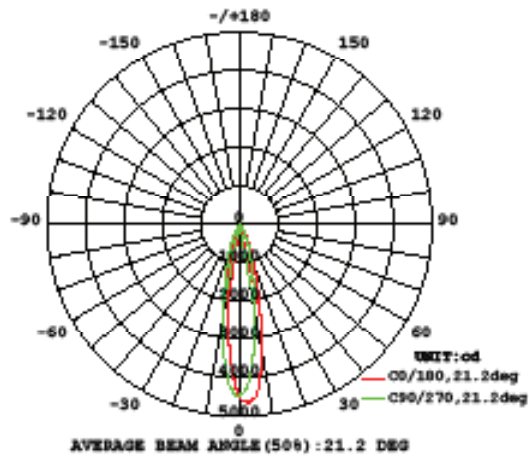

30° Beam Angle - 3000K (85 CRI)

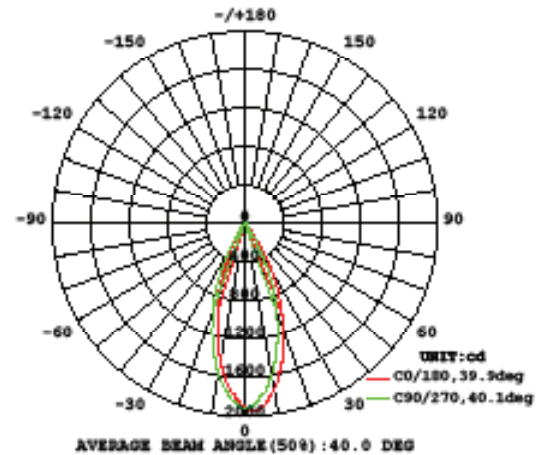

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585