



LED UFO Highbay

3 CCT and 3 Wattage Selectable

Project: _____ Location: _____

Date: _____ Part #: _____

Notes: _____



Performance & Features

Product Highlights

- 3-CCT White Color Selectable (3500K/4000K/5000K)
- Energy-saving, long lifespan
- Instant start, No humming
- Green and eco-friendly without mercury

Specification

- Finish: Highly durable die-cast aluminum , long lasting dark black and white finish available
- IP: Wet Location Rated
- Beam Angle: 90°
- LEDs: Lumileds SMD2835
- CRI: >80
- Operating Temp: -40°F to 122°F
- Life: L70 of 100,000 hours

Certifications

- UL Listed , DLC 5.1 (Premium)
- 5 Year Limited Warranty

LED Driver

- 0-10V Dimmable
- 120-277V / 277-480VAC
- Built in 6kV Surge Protector
- Flicker <5%

Quick Order


Model No.	Power (W)	Lumens (lm)	CCT (K)	LPW	Voltage (V)	Finish
100T150W - Selectable UFO-100T150W-3CCT-DV2-NA-90-BK UFO-100T150W-3CCT-DV2-NA-90-WH	100W/125W/150W	16,000/20,000/ 24,000	3CCT 3500K/4000K/5000K	160	120-277V	Black or White
150T240W - Selectable UFO-150T240W-3CCT-DV2-NA-90-BK UFO-150T240W-3CCT-DV2-NA-90-WH	150W/200W/240W	24,000/32,000/ 38,400	3CCT 3500K/4000K/5000K	160	120-277V	Black or White
100T200W - Selectable UFO-100T200W-3CCT-DV3-NA-90-WH	100W/150W/200W	15,000/22,500/ 30,000	3CCT 3500K/4000K/5000K	150	277-480VAC	White
200T300W - Selectable UFO-200T300W-3CCT-DV2-NA-90-BK UFO-200T300W-3CCT-DV2-NA-90-WH UFO-200T300W-3CCT-DV3-NA-90-WH	200W/240W/300W	30,000/36,000/ 45,000	3CCT 3500K/4000K/5000K	160 150	120-277V 277-480VAC	Black or White

Contact for custom configuration & specifications



Black & White finishes available

Dimensions

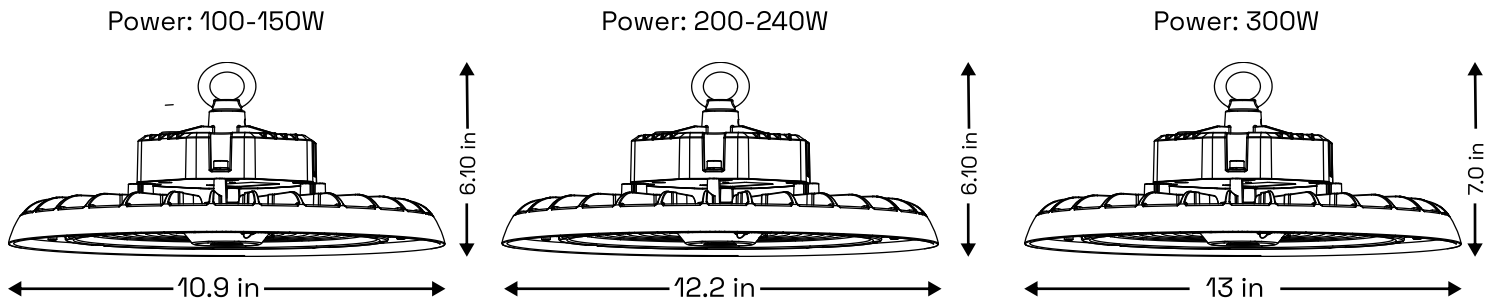


Packaging Dimensions

SKU#	Master Carton	Qty
UFO-100T150W-3CCT-DV2-NA-90-BK UFO-100T150W-3CCT-DV2-NA-90-WH	11.61x11.61x5.51in	1
UFO-150T240W-3CCT-DV2-NA-90-WH UFO-150T240W-3CCT-DV2-NA-90-BK	12.99x12.99x5.71in	1
UFO-100T200W-3CCT-DV3-NA-90-WH	12.99x12.99x5.71in	1
UFO-200T300W-3CCT-DV2-NA-90-BK UFO-200T300W-3CCT-DV2-NA-90-WH UFO-200T300W-3CCT-DV3-NA-90-WH	14.56x14.56x6.1in	1

Photometry

UFO-100T150W-3CCT-DV2-NA-90-BK
 UFO-100T150W-3CCT-DV2-NA-90-WH

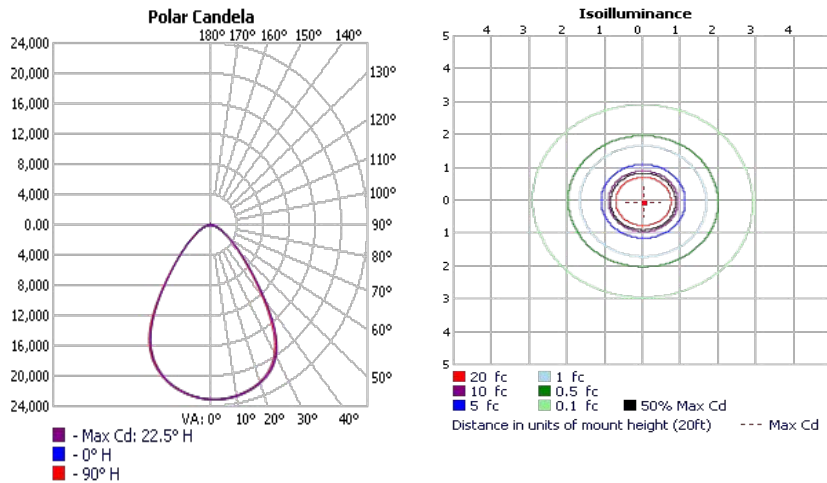

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	18,011.6	43.3%	43.3%
0-40	27,991.8	67.4%	67.4%
0-60	38,388.6	92.4%	92.4%
60-90	3,015.4	7.3%	7.3%
70-100	1,063.2	2.6%	2.6%
90-120	36.4	0.1%	0.1%
0-90	41,404.0	99.6%	99.6%
90-180	147.7	0.4%	0.4%
0-180	41,551.6	100%	100%

BUG Rating

B5 - U3 - G1

Forward Light	Lumens	Lumens %
Low(0-30):	9,133.6	22%
Medium(30-60):	10,508.7	25.3%
High(60-80):	1,443.3	3.5%
Very High(80-90):	87.0	0.2%
Back Light		
Low(0-30):	8,878.5	21.4%
Medium(30-60):	9,874.3	23.8%
High(60-80):	1,397.0	3.4%
Very High(80-90):	88.0	0.2%
Uplight		
Low(90-100):	12.3	0%
High(100-180):	135.4	0.3%
Trapped Light:	0.001	0%

Note: Additional Photometry available on request

Accessories



Microwave Sensor
UFO-MS



Sensor Remote
UFO-RC



Acrylic Reflector
UFO-REFL-S
UFO-REFL-L



Connecting box
UFO-ADP



UFO Drop Lens
UFO-LENS-S
UFO-LENS-L



Surface Mount Bracket
UFO-SMB