

INSTALLATION INSTRUCTIONS


Two-Piece Toilet with 12" Rough-In
TT-5




PRIOR TO INSTALLATION:

- Inspect toilet to ensure no damages have occurred while in shipping.
- Please compare parts with package list. If anyone is damage or missing, please contact us. We will replace new one for you.
- Observe all plumbing and building codes in accordance with your state and local requirements.
- All dimensions are nominal! Be sure to measure your toilet prior to installation.
- The step-by-step guidelines in the installation instructions are a general reference. Should there be any discrepancies, Swiss Madison cannot be held liable. It is recommended to install all Swiss Madison products by hiring a licensed professional.
- Read installation and maintenance instructions thoroughly before installing. Be sure to use proper tools and always wear proper personal safety accessories for your protection.
- Two people are recommended to handle and install this product as it is fragile.
- Fill valve has been factory-tightened to design specifications. If re-tightening is required, use a wrench a tighten one turn past finger tight.
- Make sure the supply pressure is a minimum of 35 psi (2.5kg/cm³), the toilet will not function properly without minimum water pressure.


PRODUCT SIZE:

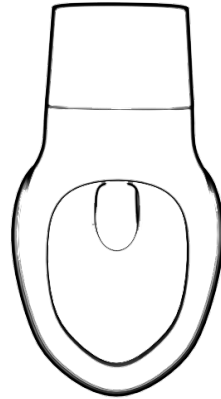


PARTS LIST:



· One-Piece Toilet




· One-Piece Toilet




· One-Piece Toilet



· One-Piece Toilet




· One-Piece Toilet




· One-Piece Toilet




· One-Piece Toilet



· One-Piece Toilet











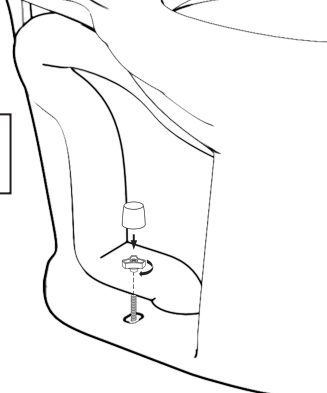
· One-Piece Toilet



· One-Piece Toilet




· One-Piece Toilet

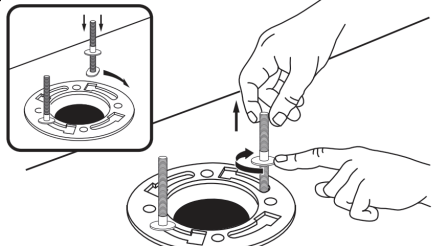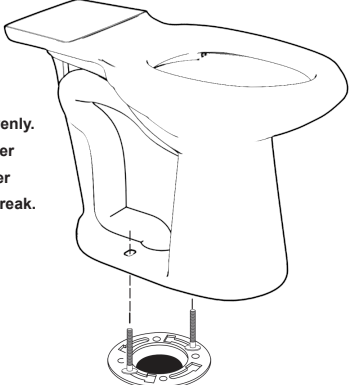Before You Start:		If Removing An Existing Toilet	
<p>Turn Off Water Supply</p> 	<p>Flush to remove water from tank; sponge remaining water from bowl before removing toilet.</p> 	<p>Clean Flange</p>  <p>⚠ Caution: If leaving floor flange open for more than 1-2 hours, cover flange to prevent escaping sewer gases.</p>	
 <p>Recommended fitting type for back-to-back installations.</p>		<p align="center">BACK-TO-BACK INSTALLATION</p> <p>Depending upon your plumbing and venting conditions, the flow from the toilet in a back-to-back installation may create a vacuum on the system and draw water from the opposing bowl. The National Standards Plumbing Code prohibits the use of a cross fitting for drainage as throw over is possible. The code does approve a directional "Y" style fitting with proper venting to direct the water downward and away from the other toilet.</p>	
<p>1</p>  <p>NOTE: 1/4" EZ-BOLTS INCLUDED. IF 5/16" BOLTS ARE REQUIRED, PURCHASE SEPARATELY.</p> 		<p>2 Press firmly.</p>  <p>Wax Ring (sold separately)</p>	
<p>3</p> <p>Apply weight evenly. Do not move after placement. Water tight seal may break.</p> 		<p>4</p> <p>⚠ Hand tighten only. Do not overtighten.</p> 	

5

Install tank bolts in bottom of tank as shown.


▲ Tank to Bowl Gasket
Place the tank gasket over the tank nut ensuring there are no gaps between the gasket and the chinaware.



6

Tighten handles alternately until the tank contacts the front and back of the bowl achieving china-to-china contact.


NOTE: To ease installation, push down on the top of the tank while tightening handles.

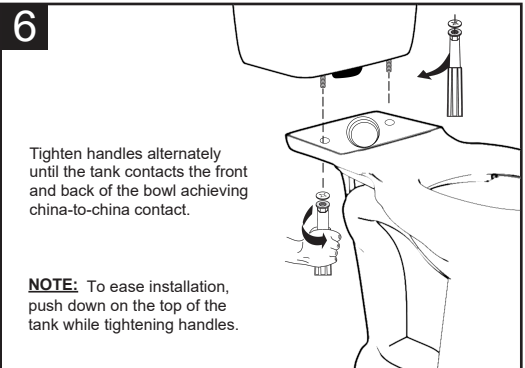

7

A
Connect water supply line. (Sold separately) Hand tighten nut.


B
Turn on water supply.

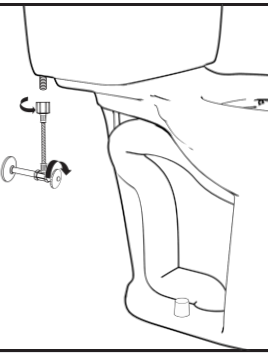

▲ WARNING: Overtightening of water supply line nuts could result in breakage and potential flooding. If the connection leaks after hand tightening, replace the supply line. Do not use any type of sealant on the water supply connection. Use of plumber's putty, pipe dope, or any other type of sealant will void the warranty.

8 SINGLE FLUSH

Adjust water level to level indicated on tank by turning water level adjustment knob to move float cup up or down.

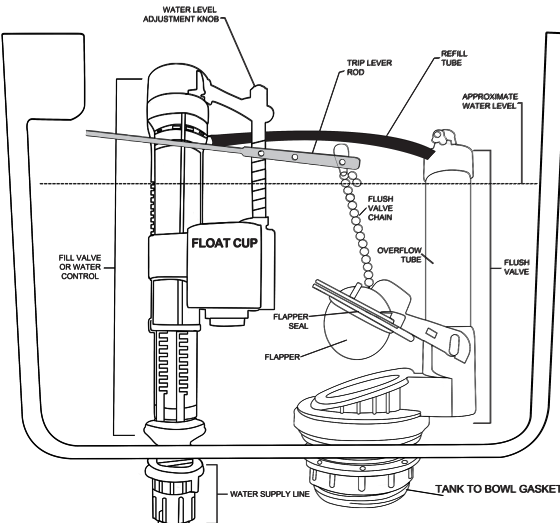

WARNING:

- The load capacity for magnet holder and hook is approximately 3 lbs. Please avoid hitting and scratching the protective layer on the surface.
- If you require technical support or in the unlikely event that your purchase is faulty please EMAIL US for immediate assistance. Faulty product claims made within the 2 year warranty period will be replaced free of charge.