

Installing Quartz Movement

Center dial on dial panel over the center shaft hole. Install four screws in each corner as shown.

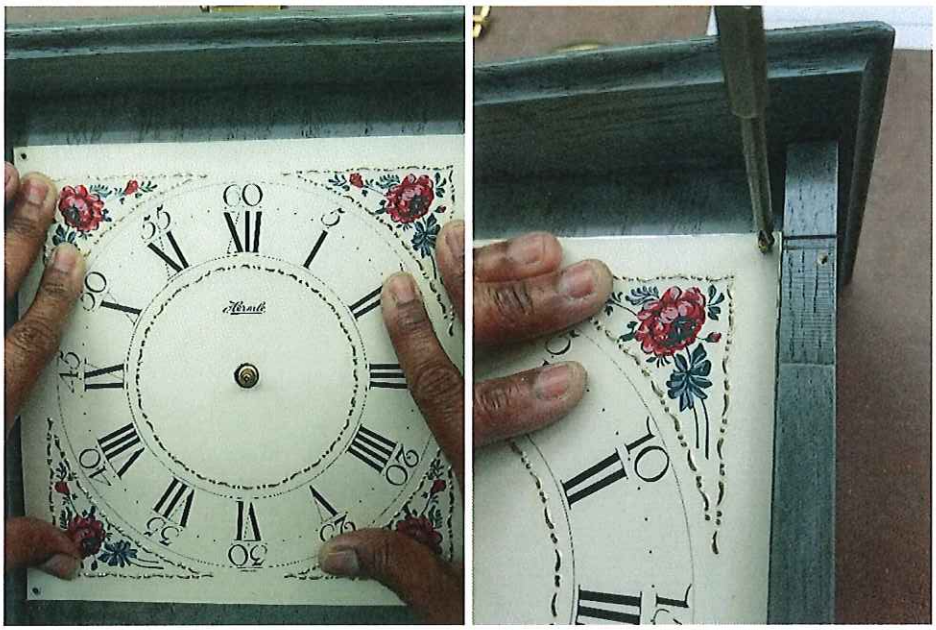

1. Install speaker as shown in picture 1. Place speaker in cut out of bottom panel with the wire up. Attach with screws using a screwdriver.
2. Place black grommet over center shaft as shown in picture 2.
3. Install movement in back of case. The center shaft should go through the center hole of the dial panel. See picture 3.

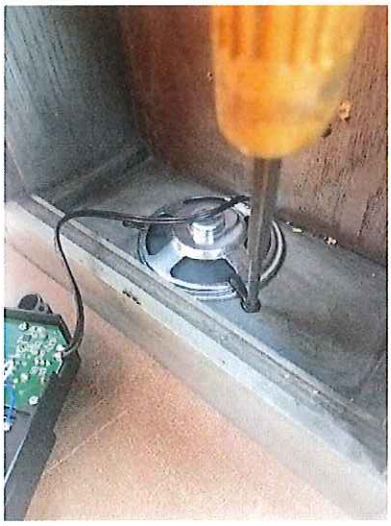

Picture 1



Picture 2



Picture 3

4. Secure movement to case with two screws on the bottom shown in picture 4.



Picture 4


5. Install brass washer and nut over center shaft and tighten. See picture 5.
6. Press hour hand onto center shaft, leaving a small amount of space between the hour hand and dial. Be sure the hand isn't rubbing the dial. See picture 6.
7. Place the minute hand over the hour hand on the center shaft. Secure the hands with the hand nut. Picture 7.



Picture 5



Picture 6

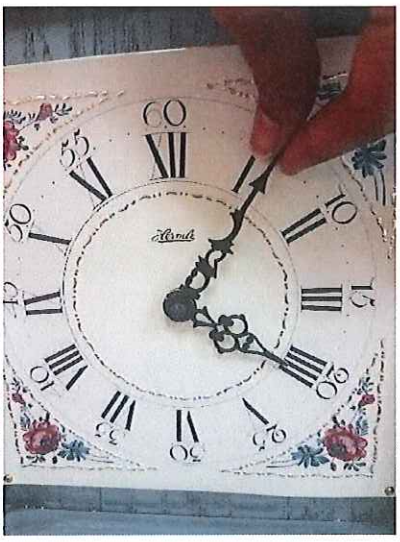

Picture 7