



# Specification

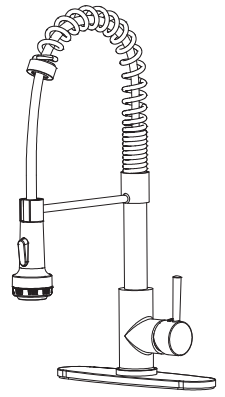

## Single-Handle Spring Neck Kitchen Faucet

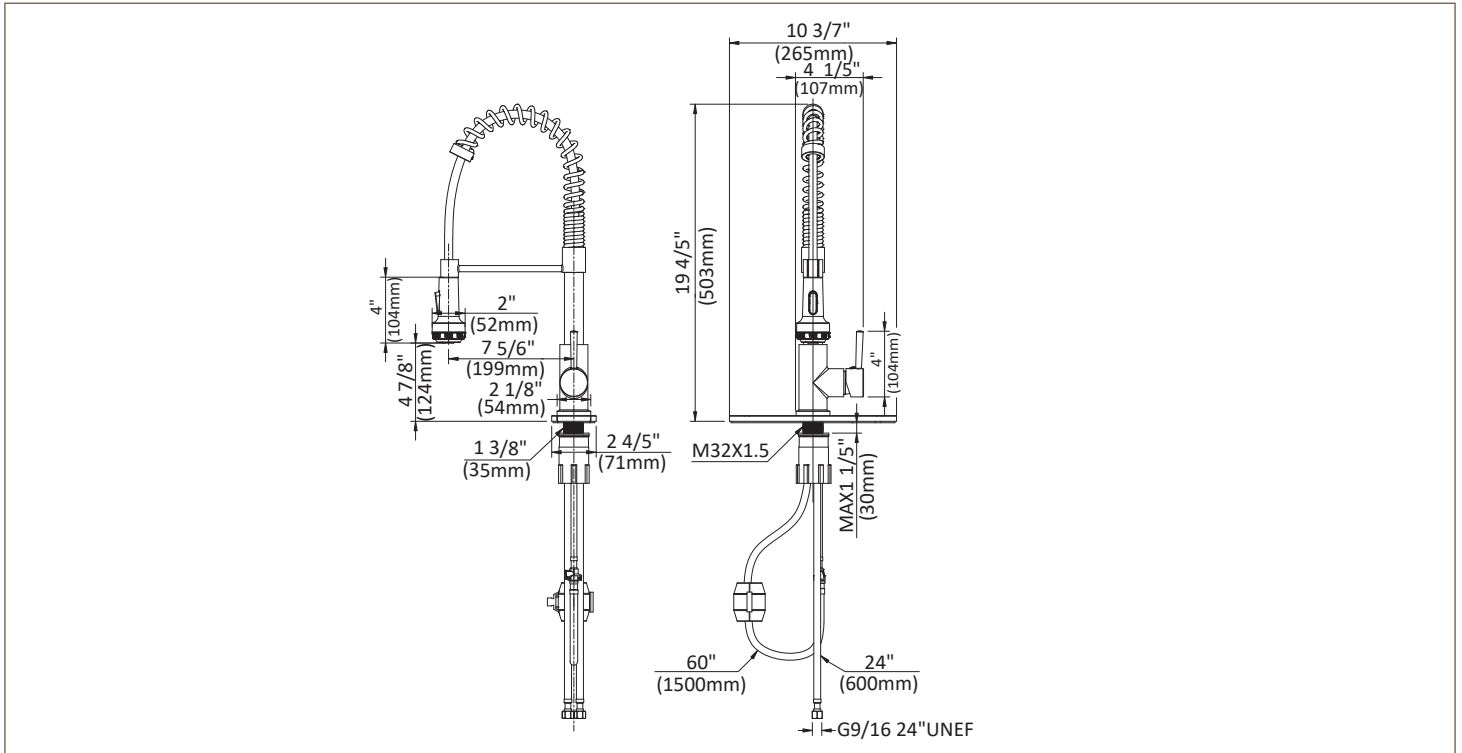

### • STANDARD SPECIFICATIONS

*HomLux faucets offer smooth operation, easy movement, self retraction, and secure docking*

- 1.8 GPM (6.8 L/min) at 60 PSI
- Pull down spray with 60" braided hose
- 4-function wand; Aerated stream, spray, double blade and double stream
- Requires 1 hole and 3 hole sink
- Spout rotates 360°
- Ceramic valve for lifetime drip-free operation
- Zinc alloy body, zinc alloy handle, stainless steel elbow
- Quick connect system for easy installation

### • CERTIFICATION

