


INSTALLATION GUIDE



TWO FUNCTIONS

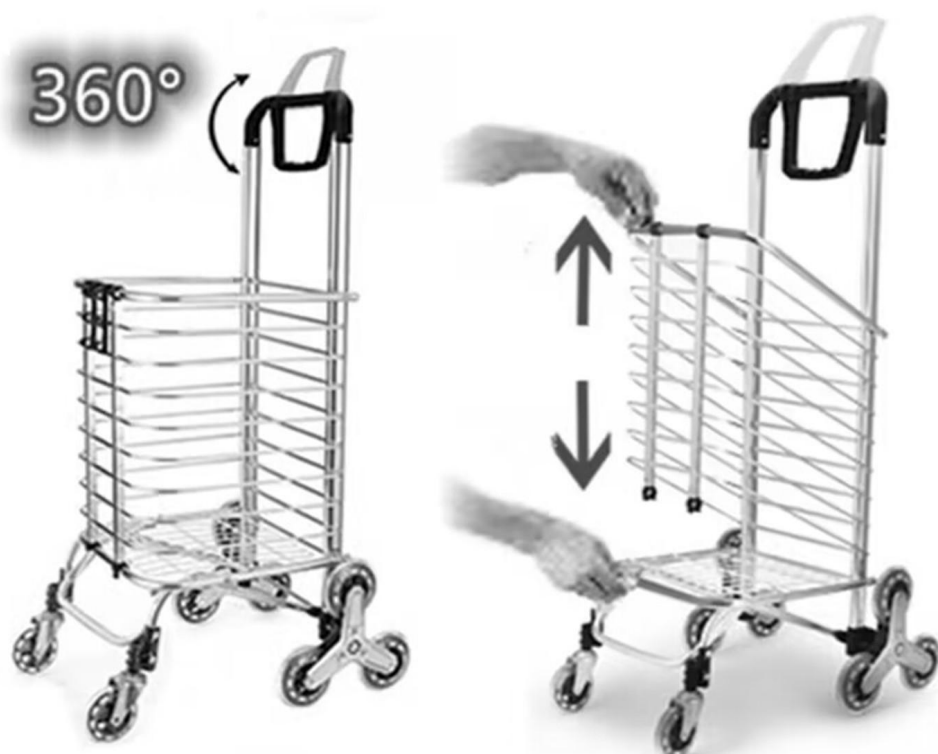

Installation drawing



Step①:Place the nut into the slot and hold it.

Step②:The screw is threaded through the wheel and then through the frame mounting hole. (If the crossing is too tight, it can be screwed in with a wrench.)

Step③:Hold the nut and tighten it with a tool.