Assembly & Installation Instructions

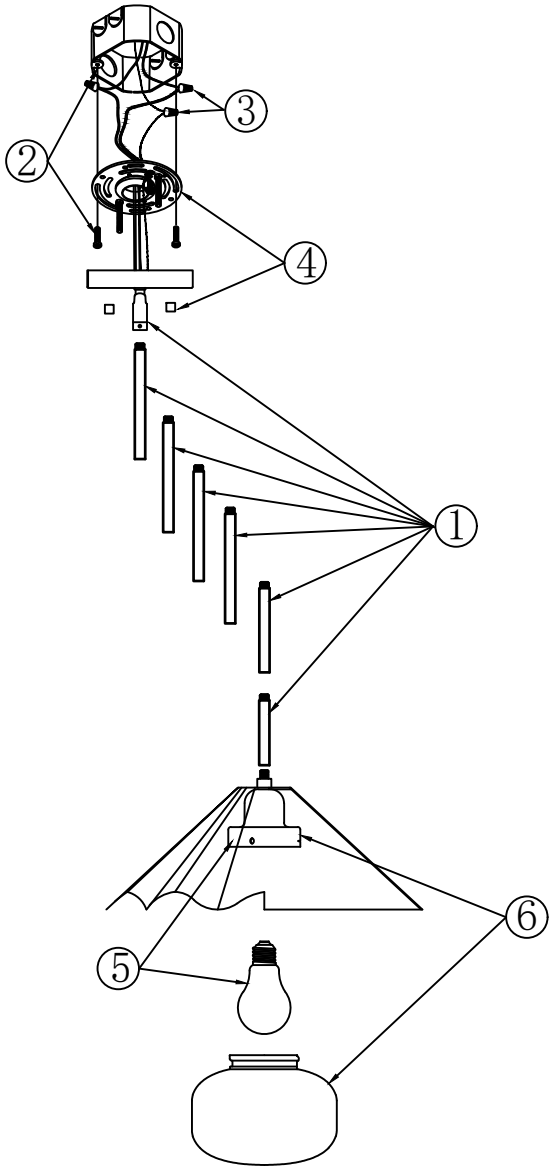

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1.Prepare the suspension rod to your required installation height. Thread fixture wires through the rod and ceiling canopy, then screw and fasten securely.
2.Secure the mounting plate to the junction box with screws.
3.Connect the wires using the wire caps as follows:
Connect the fixture's Black (LIVE/HOT) wire to the home LIVE/HOT wire.
Connect the fixture's White (NEUTRAL) wire to the home NEUTRAL wire.
Connect the fixture's GROUND wire to the home GROUND wire to the mounting plate with the green screw.
***Note:** Ensure no wire strands are exposed.
4.Fasten the ceiling canopy to the mounting plate with the decorative nut.
5.Install the bulb (Bulb not included).
6.Screw the glass shade onto the fixture body counterclockwise.
7.Turn on the power and verify the light operates normally. Installation complete.