


STEP 6

Check the position and stableness of the vessel and faucet. Open the faucet valves, and check for leakage.

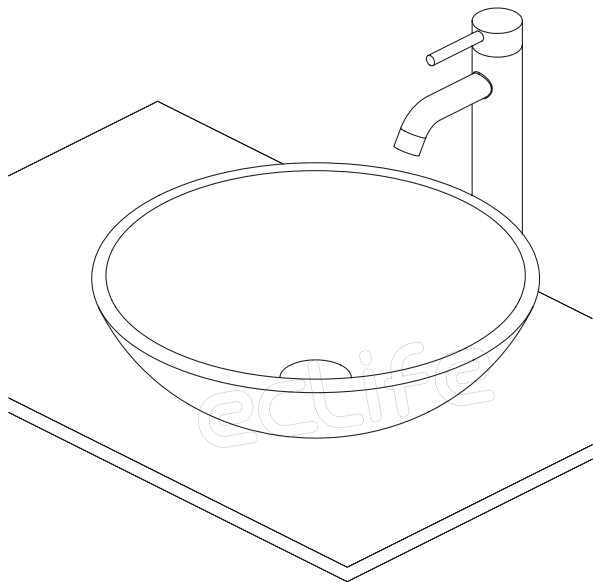

CARE AND CLEANING

To keep your vessel looking new, make sure you rinse it out thoroughly after each use. **DO NOT USE ABRASIVES** on this product, as they will scratch and ruin the surface. Stubborn stains, paint, or tar can be removed with turpentine or paint thinner.



FEEDBACK ★★★★★

Thank you very much for purchasing from us.

We focus on the cost-effective products and good shopping experience for our customers. Your suggestion on our products will be greatly appreciated.

Additionally, we sincerely hope you will be satisfied with our product and leave us positive feedback or review in our page.

If you have any questions or problems about our product, please contact us at any time so as to clear up your discontent and resolve the problem.

Many thanks and hope you enjoy shopping with us!

Contact number: 646-2230128

E-mail: support@ec-export.com




NO.16010


INSTALLATION INSTRUCTIONS




DIMENSIONS

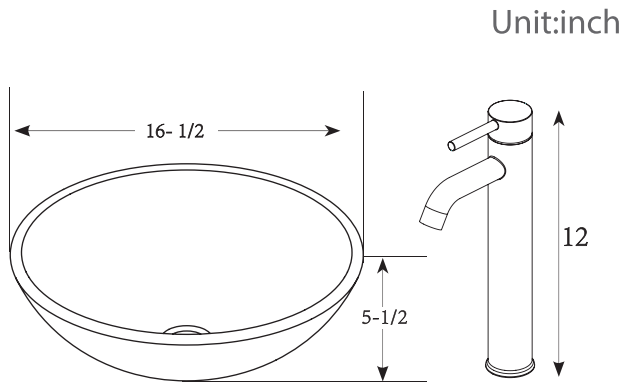

YOU MAY NEED (NOT SUPPLIED)

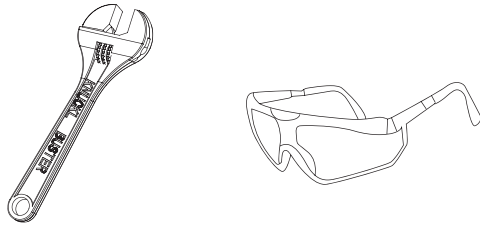

PARTS LIST

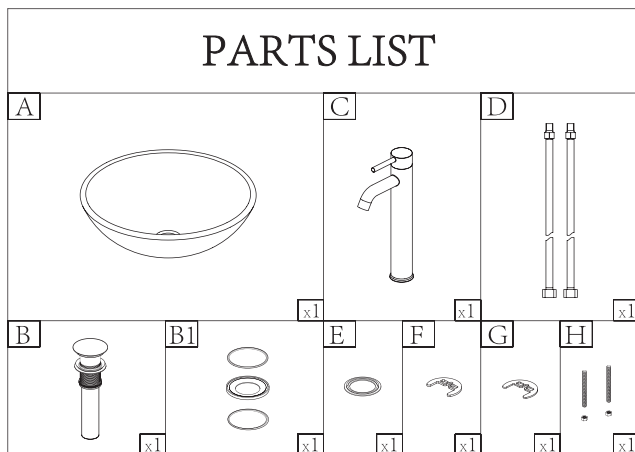


CAUTION: Please confirm the part list before installtion


INSTALLATION

STEP1

Take apart the pop up drain and put the thin rubber washer at the top of body.

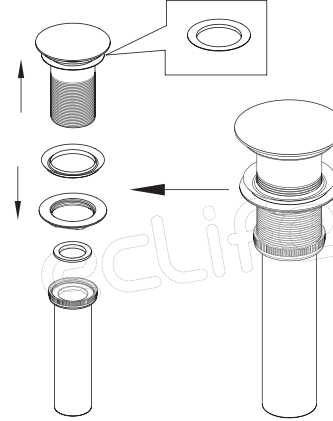

STEP2

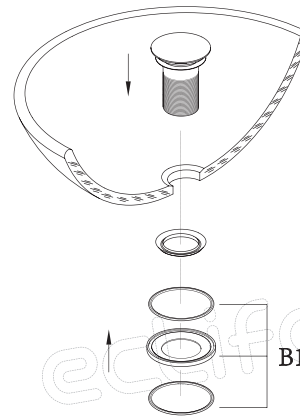


Insert the drain top into the vessel. Install thick rubber washer, 2 O-rings and mounting ring in turn.

Note: Installation sequence of O-rings refer to the illustrations.

STEP3


Carefully position the vessel with drain top on the tabletop and adjust the assembly parts in good position.

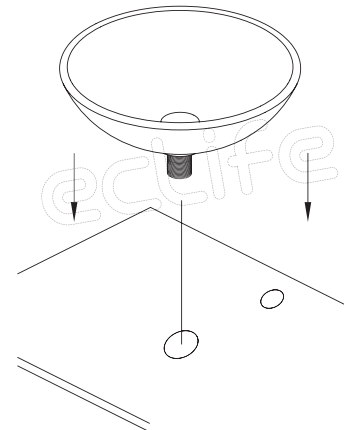

STEP 4

Install the drain nut and tighten it, then install the tall piece.

Caution: The optimum drain hole requirement is 1-3/4". If the drain hole is already exists and the size is between 1-3/4" and 2-3/4". Please use an extra gasket or mounting ring (need to be ordered in extra) to fix it.

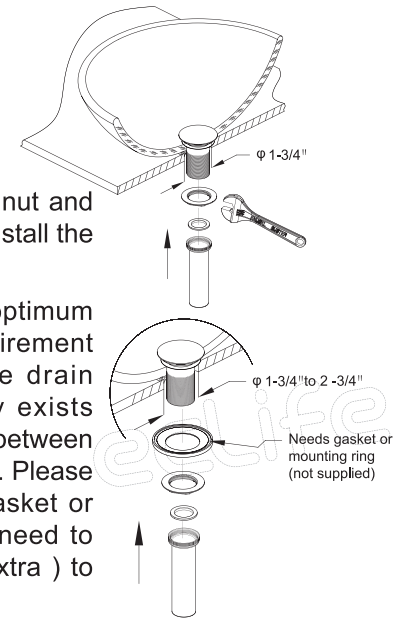

STEP 5

Position the gasket under the faucet. Connect the hot and cold water pipes to the faucet. Insert the faucet into the hole. Install the rubber gasket, then the metal gasket, then the fixing bolts. Tighten the fixing bolts

