















Assembly Instructions

56004231

Parts and Tools

A	Mounting bracket		X 1
B	Canopy		X1
C	Main Chain		X1
D	Open ring		X1
E	Wire connector		X3
F	Loop part		X1
G	Sloping Chain		X3
H	Center pole		X1
I	Lamp body		X1
J	Lock wire buckle		X2
Z1	Nut for A (Spare Parts)		X1
Z2	Nut for A (Spare Parts)		X2
Z3	Non Slip Washer for A (Spare Parts)		X1
Z4	Non Slip Washer for A (Spare Parts)		X2


Before beginning

- 1) Check and open the numbered packaged bags.
- 2) Read this Assembly Instructions from beginning to end before starting to assemble.
- 3) Take an inventory of the required parts to ensure all are available.
- 4) Assemble the separated parts according to the illustration with the providing tools, chandelier comes pre-assembled, only hanging and wiring assembly needed.
- 5) To prevent accidental choking hazards, keep all packing materials away from small children.
- 6) Only tighten hardware until ALL hardware are fully engaged on their locations. Overtighten bolts will damage the bolt threads.
- 7) Use only factory provided hardware to assemble. Unapproved hardware can damage product or jeopardize the structural integrity of the product.
- 8) The use of power tool to assemble is not recommended due to high risk of over-torque, which can damage the product.

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LINCENSED ELECTRICIAN.

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

Please make sure power is shut off!

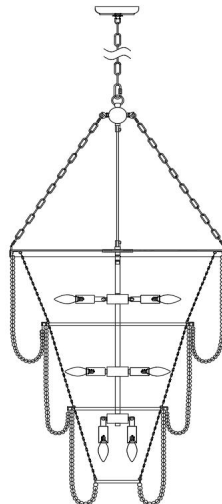

ASSEMBLY REQUIRES
TWO PEOPLE



20 MINUTE
ASSEMBLY TIME




KEEP INSTRUCTIONS
FOR FUTURE USE

Assembly Instructions


56004231

1

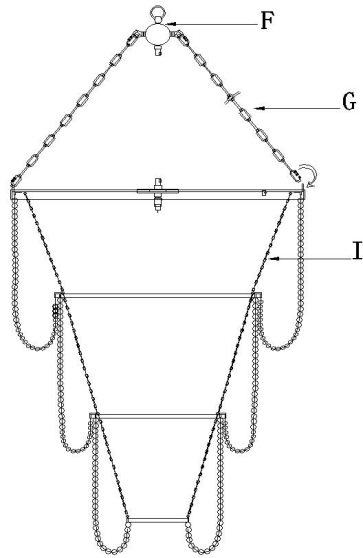

1. Take out the sloping chains (G) to link the lamp body (I) and the loop part(F) together.


2

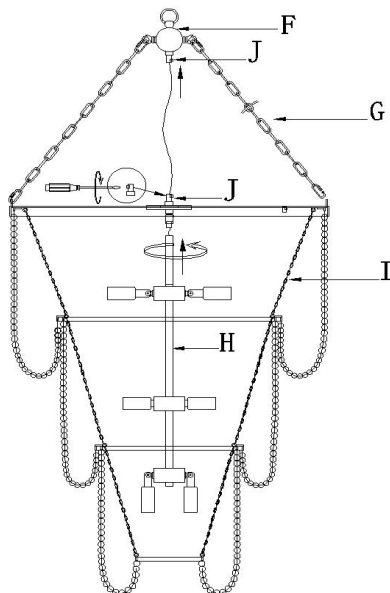

1. Take out the center pole (H) to install it, then put the wire through the center circle of the lamp body (I). After the wire is adjusted, tighten it with the lock wire buckle (J).

2. Continue to thread the wire through the loop part (F) and lock it with the lock wire buckle (J).

3

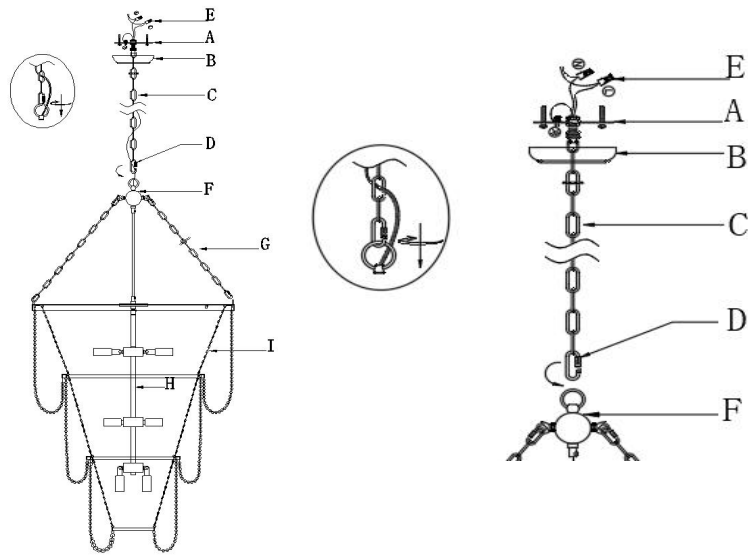


1. Remove the mounting bracket (A) from the canopy (B) by loosening the collar.
2. Taking off the open ring (D) and use the dimensions of the fixture as a guide, shorten the chain (C) as needed using a pair of chain pliers.
3. Use the open ring (D) to link the chain (C) and the loop, then put the cable through the chain(c) in every 3-4 rings until through the ceiling loop.
4. ENSURE THE ELECTRICITY SUPPLY IS TURNED OFF BEFOR PROCEEDING.
5. Affix the mounting bracket (A) on the outlet box
6. Wrap both safety cable with wire connectors(E) , push the cable into the outlet box.
7. Attach the canopy (B) to the mounting bracket (A) and secure with collar.

4



E12 Max 40W

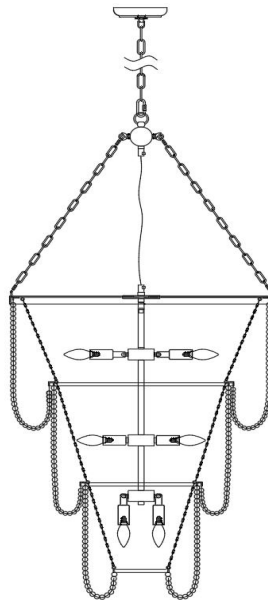

Install the bulbs (Not Included), gently hold the bulb firmly and turn clockwise until secured.
Once the installation is complete, remember to turn on the power at the fuse or circuit breaker.

*****Clean with a dry, soft cloth only, use no harsh abrasives or chemical agents*****