

### Features

- VibrAcoustic calms and soothes with sound vibration technology.
- Six concealed speakers send sound waves through the water to gently massage the body.
- Four original instrumental compositions offer different levels of relaxation.
- Plug in your smart phone, tablet, or MP3 player via auxiliary-in cable. Add your own receiver to stream wirelessly via Bluetooth®.
- Customize your experience with the high-resolution color touch screen.
- Fully adjustable volume above and below the water.
- Functions as a hydrotherapy bath when full of water and a stereo system when empty.
- Bask™ heated surface creates spa-like relaxation with soothing warmth on your back and neck.
- Three heat settings allow you to customize the surface temperature.
- Clearflo slotted overflow for deep soaking.
- \*The BLUETOOTH® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Kohler Co. is under license. Other trademarks and trade names are those of their respective owners.
- 66" (1676 mm) x 32" (813 mm) x 22" (559 mm)

### Material

- Acrylic

### Hydrotherapy

- VibrAcoustic

### Installation

- Drop-in or under-mount.

### Required Accessories

K-7271 Slotted Overflow Bath Drain

or

K-7272 Slotted Overflow Bath Drain



### Codes/Standards

CSA B45.5/IAPMO Z124

ASTM E162

ASTM E662

UL 1795











CSA C22.2 No. 218.2


### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.


### Available Color/Finishes

*Color tiles intended for reference only.*


| Color  | Code | Description   |
|--|------|---------------|
|  | 0    | White         |
|  | 96   | Biscuit       |
|  | 47   | Almond        |
|  | NY   | Dune          |
|  | 95   | Ice™ Grey     |
|  | G9   | Sandbar       |
|  | 33   | Mexican Sand™ |
|  | K4   | Cashmere      |
|  | 58   | Thunder™ Grey |
|  | 7    | Black Black™  |

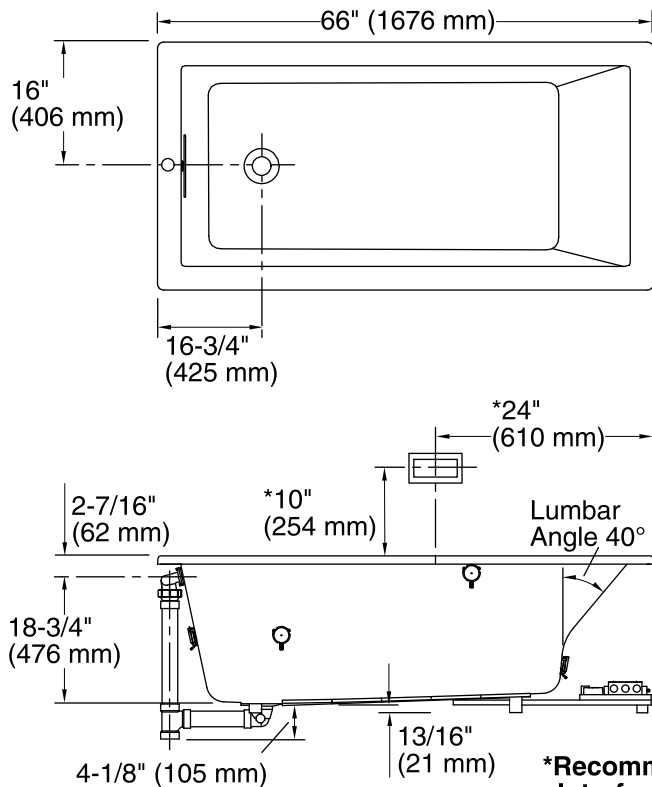

No change in measurement if connected with drain illustrated. (K-7272)

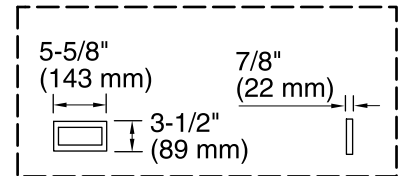


**User Interface**

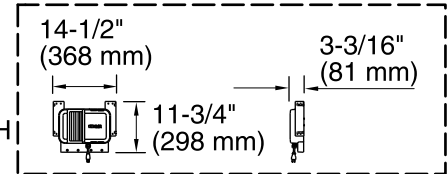

**Control Amplifier**

Control Access  
 30" (762 mm) W  
 x 15" (381 mm) H  
 Min

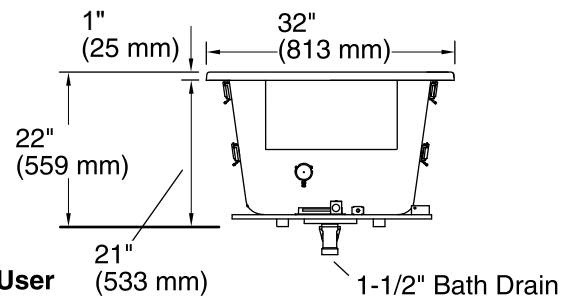

**\*Recommended User Interface Location**

### Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Amplifier, Heater: 120 V, 15 A, 50/60 Hz

### Technical Information

All product dimensions are nominal.

|                     |   |
|---------------------|---|
| Installation:       | Drop-in/Undermount  |
| Basin area, bottom: | 44-1/2" x 22-5/16" (1130 mm x 567 mm)                                 |
| Basin area, top:    | 59-5/8" x 25-1/2" (1514 mm x 648 mm)                                  |
| Weight:             | 96 lbs (43.5 kg)  |
| Minimum floor load: | 56.7 lbs/ft² (276.8 kg/m²)  |
| Water capacity:     | 85.8 gal (324.8 L)  |
| Cutout:             | Drop-in, 64-1/2" x 30-1/2" (1638 mm x 775 mm)                         |
| Under-mount kit:    | K-550   |
| Electrical rating:  | Amplifier: 120 V, 50/60 Hz, 15 W<br>Heater: 120 V, 1.1 A, 60 Hz, 65 W |

### Notes

Measure your actual product for roughing-in details.

Install this product according to the installation guide. Ensure that the bath, user interface, amplifier, and transducers are functional before completing the installation.

Control amplifier fits 16" (406 mm) center studs. 25' (7.6 m) cables are included.

Locate the bath within 24" (610 mm) of a GFCI-protected 120 V, 15 A grounded electrical outlet. A second grounded outlet within the wall framing must be within 24" (610 mm) of the planned control amplifier. One electrical service may be used for the entire bath and related electrical components.

Hot water supply should be 70% of capacity or greater. Installations will vary.