



INSTRUCTIONS MANUAL DOUBLE-BAR WHEELED SNOW SHOVEL








IF YOU PURCHASED THE PRODUCT ONLINE AND HAVE
ANY QUESTIONS OR CONCERNS
PLEASE CONTACT US VIA EMAIL, TEXT

EMAIL: yardsightfurniture@outlook.com
TEXT: +1 323-400-0363

Before You Start


1. Please read all instructions carefully.
2. Retain instructions for future reference.
3. Separate and count all parts and hardware.
4. Read through each step carefully and follow the proper order.
5. We recommend that, where possible, all items are assembled near to the area in which they will be placed in use, to avoid moving the product unnecessarily once assembled.
6. Always place the product on a flat, steady and stable surface.
7. Keep all small parts and packaging materials for this product away from babies and children as they potentially pose a serious choking hazard.

Parts list


1. Shovel  X1	2. Fix adjustor  X1	3. Wheel base assembly  X1	4. Wheel  X2	5. Down handle  X1
6. Up handle  X1	7. Big Circular Plate  X1	8. Flange screw (M8*45)  X2	9. Fix pin (φ8*45)  X3	10. Lock nut (M6)  X8
11. Cotter pin  X4	12. Washer  X4	13. Little Circular Plate  X1	14. Button head screw (M6*20)  X8	15. Lock nut (M8)  X2
16. Wrench  X1	17. Wrench  X1			

Assembling step

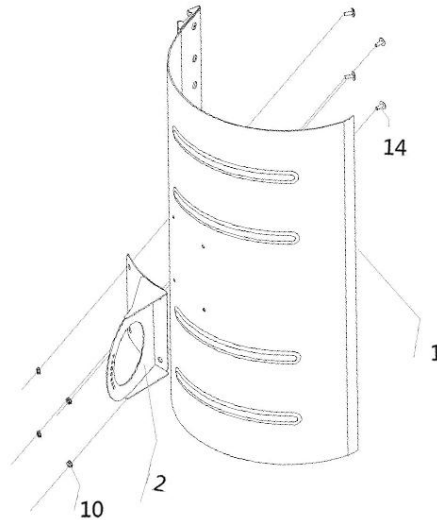STEP 1. Assemble component 1# Snow shovel and 2# Fix adjustor together using four 14# Screw and four 10# Nut.




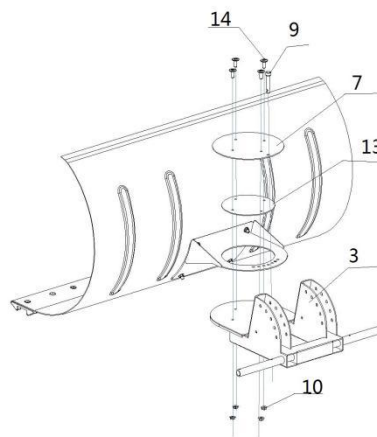STEP 2. Use four 14# Screw and four 10# nut to fix the 3# Wheel base assembly and the 2# Fix adjustor (please refer to the illustration and note that 7# Big circular plate and 13# Little circular plate need to be assembled simultaneously), and then insert the 9# Fix pin into the adjustment.




STEP 3. Connect the 5# Down handle and the 3# Wheel base assembly using 8# Screws and 15# nuts as shown in the diagram. Then insert the 9# Fix pin into the adjustment hole. Finally, insert the 6# Upper handle into the 5# Down handle.

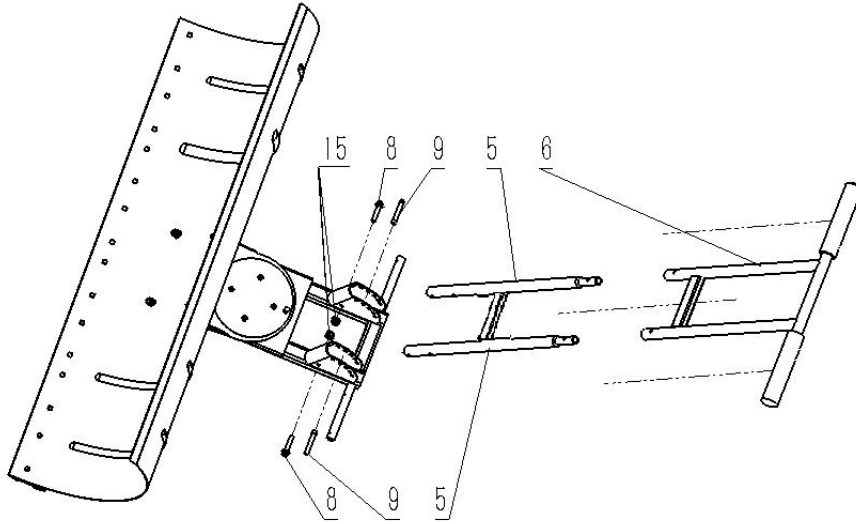Please note: When assembling, make sure the parallel holes of the handles are aligned.



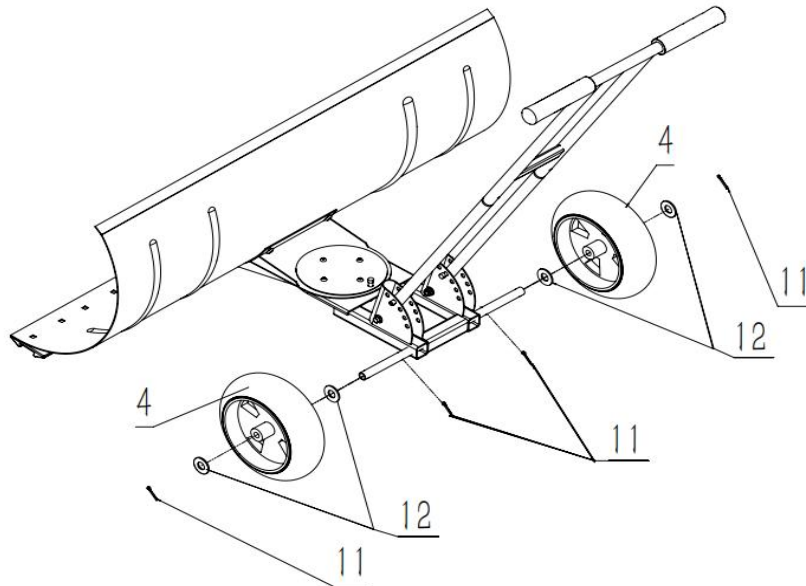STEP 4. Insert the 11# Cotter pin as shown into the inner hole of the wheel axle of the 3# Wheel base assembly. Then, place the 12# Washer, followed by the 4# wheel, and the 12# Washer again. Finally, insert the 11# Cotter pin into the outer hole of the wheel axle.



Note: The angle of the shovel head / the height of the handle can be adjusted by removing the plug from the 9# Fix pin.