











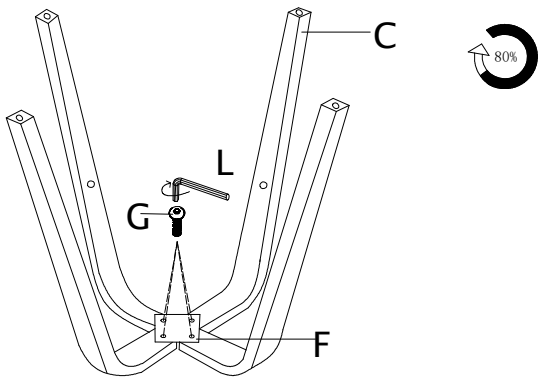


ASSEMBLY INSTRUCTION

ITEM NO.:AM-7156A-3


KEY	QTY	DESCRIPTION	KEY	QTY	DESCRIPTION
A	1		G	14	
B	1		H	1	
C	4		I	4	
D	1		J	4	
E	1		K	1	 M4
F	1		L	1	 M6



80%


Note: If the screw hole on the last leg cannot align with the hole, loosen the screws on the front three legs to adjust the distance.

Step 1

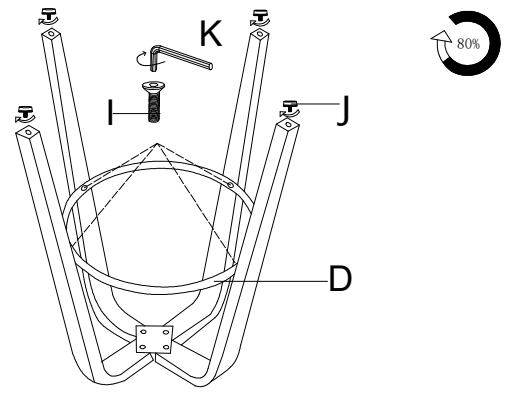


80%

Step 2




Rotate it before installation

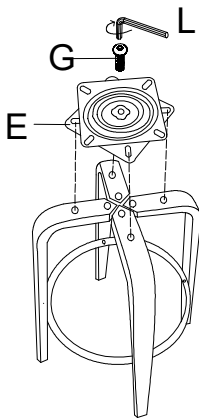

80% → 100%

Tip:
Align the holes, tighten the screws to 80%. Place the stool on a flat ground and ensure that it is levelled. After that, tighten all the screws to 100%. Otherwise, it will lead to the alignment issue.


Step 3

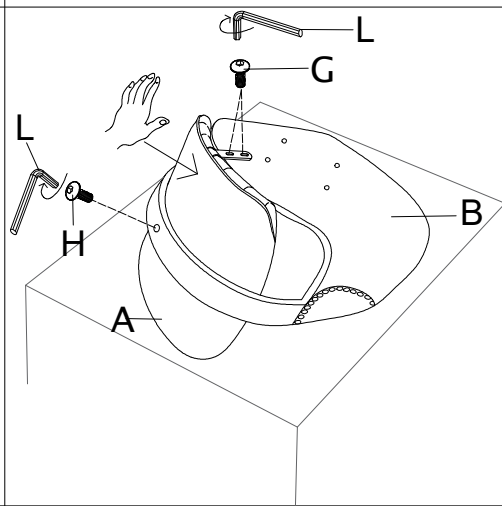


80% → 100%

Tip:
1. Place the chair upside down on a flat surface, align the holes, and tighten the G screw to 80%.
2. When operating the H screw, you can press it down by hand and tighten the screw to 80%.
3. After the hole position is smooth, tighten all screws to 100%.
Otherwise, it will lead to the alignment issue.


Step 4

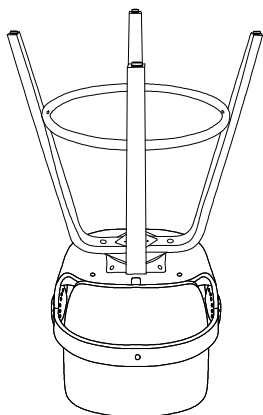

80% → 100%

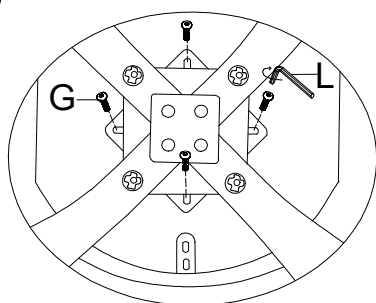

Step 5

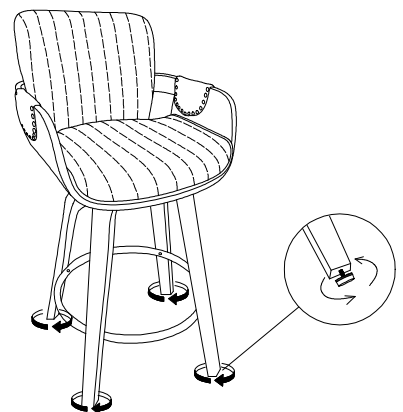

Note: After assembly, adjust part J if needed, so that the stool can be in balance perfectly.

Step 6