


# 8242PL-01BK-US / 8242PL-01GD-US

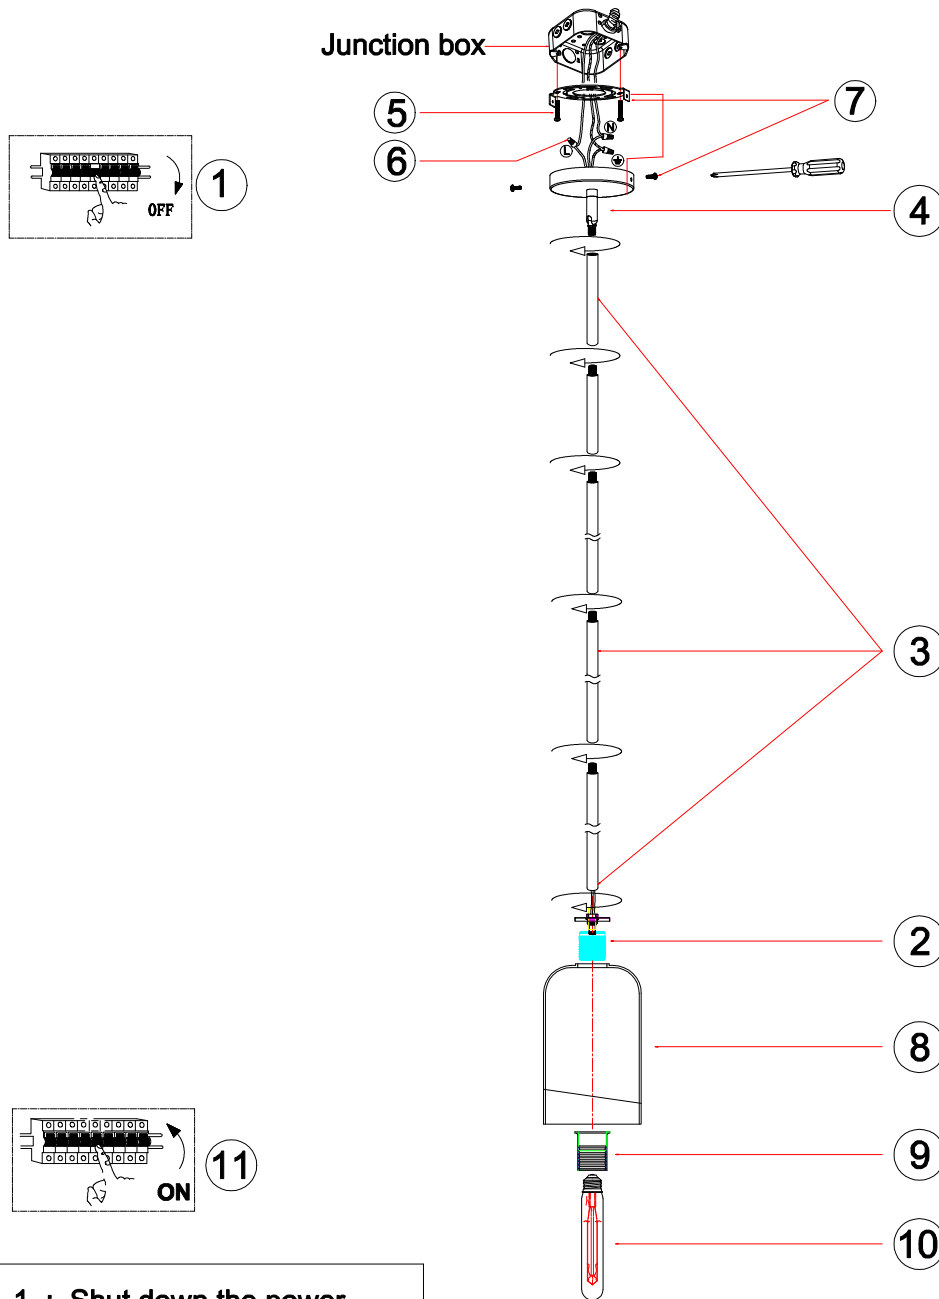

- 1 : Shut down the power.
- 2 : Take the lamp cap out of the package and let the wires hang naturally.
- 3 : Pass the wires of the lamp head through the long double inner tooth straight tube and the short inner tooth straight tube, and then tighten them respectively by twisting continuously.
- 4 : Insert the wires from the lamp cap and the double inner tube into the ceiling mount and the universal head, and then tighten them.
- 5 : Use the included fixing screws to secure the installation bracket onto the electrical junction box on the wall.
- 6 : Tighten the wiring end cover in the correct manner
- 7 : Tighten and fix the installation plate onto the junction box, and then secure the screws on both sides of the ceiling.
- 8 : Put the glass lampshade over the lamp base.
- 9 : Use the lamp cap ring to secure the glass cover.
- 10 : Insert the E26 long bulb into the lamp socket.
- 11 : Turn on the main power supply, and the lights will come on.