
















3 Seater & 1 Ottoman

Prerequisite Tips: After all packages are received and the accessories are clearly counted, we can proceed with the sofa installation more efficiently.

A *3  Seat Frame	B *3  Seat Cushion	C *3  Backrest	D *3  Back Cushion	E *2  Armrest	F *2  Armrest Cushion		
G *2  Pillow	H *1  Ottoman Frame	I *1  Ottoman Cushion	J *4  Seat Frame Connector (U-shaped)	K *22  Screw	L *22  Washer	M *16  3.15 inch leg	N *1  L tool

3 Seater & 2 Ottomans

Prerequisite Tips: After all packages are received and the accessories are clearly counted, we can proceed with the sofa installation more efficiently.

A *3  Seat Frame	B *3  Seat Cushion	C *3  Backrest	D *3  Back Cushion	E *2  Armrest	F *2  Armrest Cushion		
G *2  Pillow	H *2  Ottoman Frame	I *2  Ottoman Cushion	J *4  Seat Frame Connector (U-shaped)	K *22  Screw	L *22  Washer	M *20  3.15 inch leg	N *1  L tool

Installation guide

Prerequisite Tips: Please be careful and use tools correctly during installation to avoid hurts.

SECTION 1

Take out the accessories, install the M sofa legs on the A seat frame and H ottoman frame

STEP 1



Twist the M sofa legs to the corresponding positions
(Including single seat/ottoman)

STEP 2




All sofa legs are fully operated

SECTION 2

Install the E armrest onto the A seat frame with K screws

STEP 1

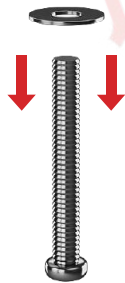

Check if there is a L Washer on the each K Screw

STEP 2



First, manually insert the five screws into the corresponding holes on the E armrest and the side of A seat frame to fix them, then use N L-shaped tool to tighten.

STEP 3



Ensure that each screw is tightened.
(Tips: Turn clockwise until fully tightened).

STEP 4




Complete all armrests installation

SECTION 3

Install the C backrest onto the A seat frame with K screws

STEP 1

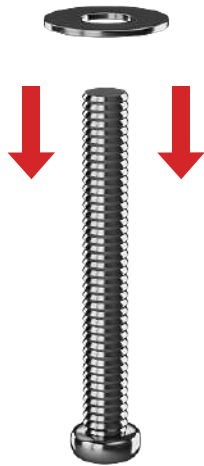

Check if there is a L Washer on the each K Screw

STEP 2



Put the fixed legs of the C backrest vertically into the corresponding holes of the A seat frame, ensuring that the fixed legs of the C backrest aligns with the holes on the A seat frame.

STEP 3



First, manually insert the four screws into the corresponding holes on the C backrest and the side of A seat frame to fix them, then use N L-shaped tool to tighten.

STEP 4




Complete all backrests installation

SECTION 4


Connecting Seats

STEP 1

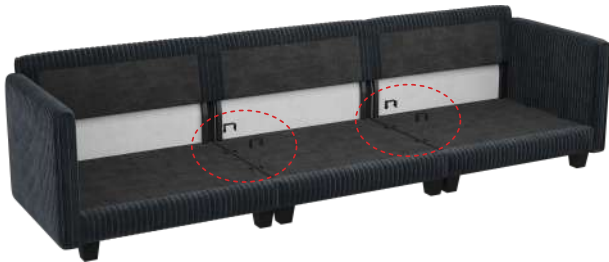

Align the seats and make them tightly together for a stable fit

STEP 2

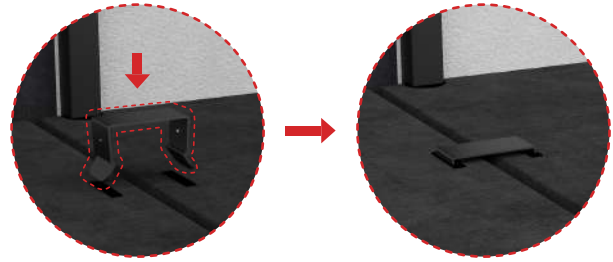

Fasten with J Seat Frame Connector(U-shaped)

SECTION 5

Remove the Velcro and place the seat cushions (BFHGI)

STEP 1



Remove the Velcro covers from the A Seat Frame and H ottoman frame (tips: two strips per seat)

STEP 2



Remove the Velcro covers from the B seat and I ottoman cushion (Tips: two strips per seat cushion)

STEP 3



Place all cushions, including all seat, back, armrest, ottoman cushions and pillows.

Tips: The front of seat cushion has two layers.

STEP 4




COMPLETE!

3. Maintenance Tips

Tips: these videos can be found on our social media.



For fabrics:

1. Before you start cleaning, it is recommended to vacuum thoroughly to better protect and clean the sofa.
2. The back cushion covers, arm cushion covers, seat cushion covers and pillows are detachable. When they need to be cleaned, they can be removed and put in the washing machine for cleaning. The parts that cannot be removed can be wiped promptly with detergent, damp cloth or soft brush.





For fillings:

1. Gently pat the sofa cushions and seats regularly to maintain the fluffiness of the fillings and ensure long-lasting comfort.
2. Rotate the seat cushions periodically to find your preferred seating feel.



For the frame:

1. Avoid placing the sofa in a humid environment for extended periods to prevent the solid wood frame from absorbing moisture and warping. If the indoor environment is humid, use a dehumidifier or place desiccants nearby to maintain dryness.
2. Avoid applying excessive force to the armrests or back frame to protect the sofa's structural integrity.



-  YT: @Vesgantti
-  IG: vesgantti_home
-  FB: VesganttiOfficial
-  X: vesgantti_home
-  Pinterest: VesganttiOfficial