ASSEMBLY AND INSTALLATION INSTRUCTIONS


Item No: BD085-2-BG/BD085-3-BG/BD085-4-BG


WARNING: TO AVOID THE RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.


NOTES:

1. Before installing,consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.
3. Always switch off the power supply and allow the bulb(s) to cool for at least 10 minutes before replacement.

BD085 (2/3/4-LIGHT) VANITY LIGHT

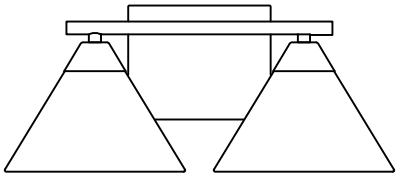


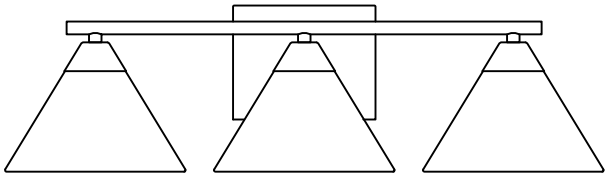

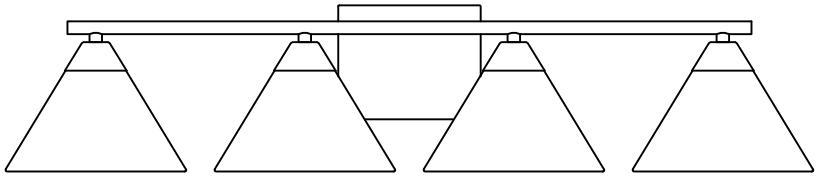



TOOLS REQUIRED



Flathead Screwdriver



Phillips Screwdriver


Ladder


Wire Strippers


Pliers


Electrical Tape


Wire Cutters


Safety Glasses

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.Do not discard the packaging until installation is complete to ensure that no parts or hardware are accidentally discarded.

PART LIST AND HARDWARE LIST


PIECE	DESCRIPTION
A	Mounting bracket
B	Junction Box Screw
C	Mounting Screw
D	Fixture Body


PIECE	DESCRIPTION
E	Socket
F	Shade
G	Retaining Ring
H	Green ground screw

PIECE	DESCRIPTION
I	Wire nut

INSTALLATION

1.Attach the mounting bracket (A) to the junction box using the junction box screws (B).
2.Secure the supply ground wire to the green ground screw (H), then connect the supply ground wire to the fixture ground wire with a wire nut (I). Connect white to white and black to black using the remaining wire nuts (I).
3.Attach the Fixture body(D) to the mounting bracket(A) with the Mounting screw(C).
4. Attach the shade (F) to the socket (E) and secure it with the retaining ring (G).
5.Install E26 LED bulbs (not included) into the sockets. CAUTION: Use LED bulbs only.

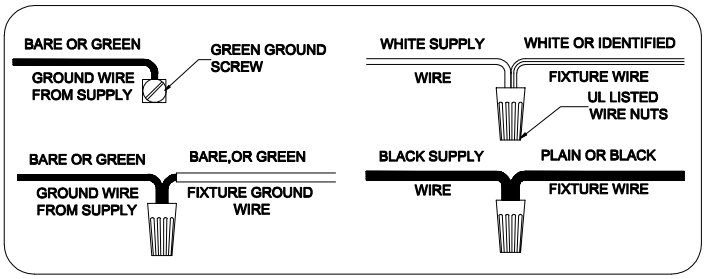

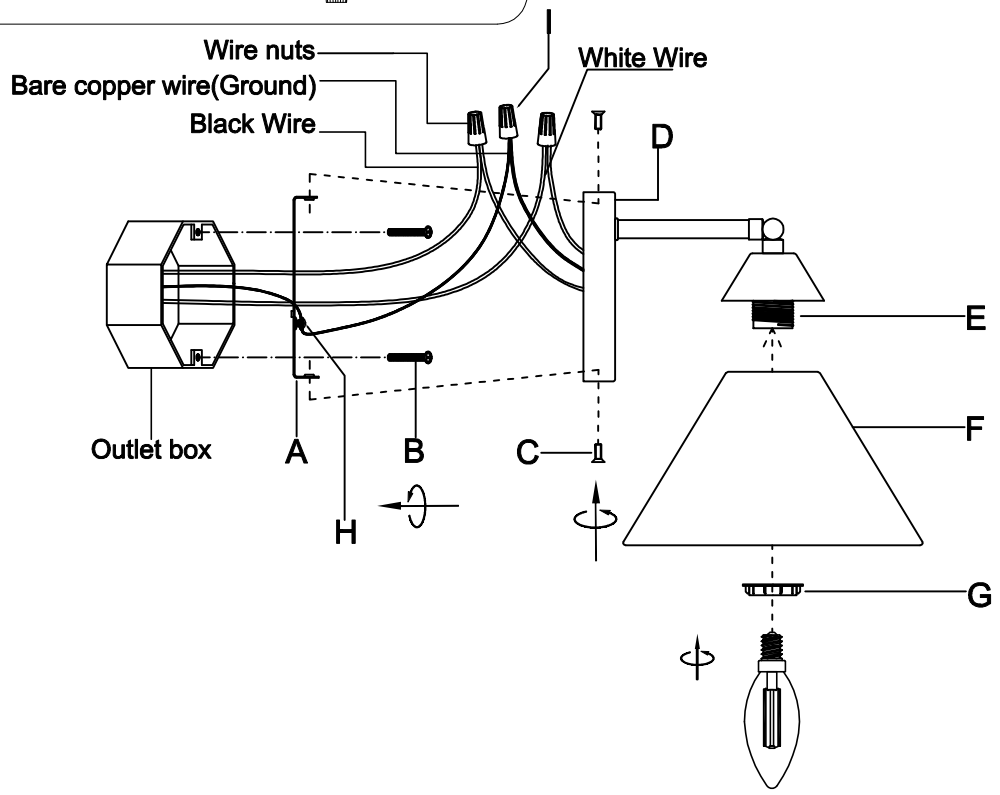

Questions, problems, or missing parts?
Before returning the product, please contact our Customer Service Team for the quickest solution.

Customer Service Email: lighting_service@outlook.com