

Description

The H550ICAT is a dedicated LED new construction housing to be used with compatible Halo LED modules and trims. The H550ICAT is designed for insulated ceilings and can be in direct contact with ceiling insulation*. This Air-Tite housing design restricts airflow between conditioned spaces and unconditioned areas. The H550ICAT connector system provides high efficacy code compliance when used with a compatible Halo LED lighting systems.

| | | |
|-------------|--|------|
| Catalog # | | Type |
| Project | | |
| Comments | | Date |
| Prepared by | | |

Specification Features

Housing

- Single wall aluminum housing
- Designed for insulated ceilings in direct contact with insulation* (May also be installed in non-insulated ceilings)
- Overspray protector included

Plaster Frame

- Galvanized steel die-formed construction
- Housing adjusts in plaster frame to accommodate up to 1-3/8" ceiling thickness
- Plaster frame features include:
 - Patented regressed locking screw positioned for securing hanger bars from below the ceiling
 - Cutouts for easily crimping hanger bars in position
 - Air-Tite™ aperture gasket is pre-installed
 - Halo identity embossed on plaster frame

Got Nail!™ Bar Hanger Bracket

Bar Hanger Features include:

- Pre-installed nail easily installs in regular lumber, engineered lumber and laminated beams
- Safety and guidance system prevents snagging, ensures smooth straight nail penetration and allows bar hangers to be easily removed if necessary
- Automatic leveling flange aligns the housing and lets you hold the housing in place with one hand while driving nails
- Five additional mounting points
- Mounting point on top for hanger wire connection
- Integral T-bar clips snaps onto T-bars - no additional clips required

q-Channel bars with Pass-N-Thru™

- q-Channel bars feature an unique inverted "q" interlocking channel for rigidity and stability
- Pass-N-Thru™ feature allows bars to

cross-over for tool-less shortening in tight spaces less than 12" without removing from the plaster frame. Push bars together and flex at score hole break points

- Housing can be positioned at any point within 24" joist span
- Bar hangers may be repositioned 90° on the frame

Slide-N-Side™ Junction Box

Junction box features include:

- Slide-N-Side™ connectors allow non-metallic sheathed cable for both U.S. and Canada to be installed without tools and without removing knockouts
 - Allows wiring connections to be made outside the junction box
 - Simply insert the cable directly into the trap after connections are made
 - accommodates the following standard non-metallic sheathed cable types: (US) #14/2, #14/3, #12/2, #12/3 (Canada) #14/2, #14/3, #12/2
- Positioned to accommodate straight conduit runs
- Seven 1/2" trade size conduit knockouts with true pry-out slots
- cULus Listed 26 in3 box volume
- Listed for through branch (8) No. 12 AWG branch circuit 90° C conductors through the box

Quick Connect™

- Three 4-port push-in "Quick Connect" wire nuts included in junction box
- Speed installation and increase reliability
- No additional wire nuts required
- Simply strip and insert supply wires

LED Module Connection

- Halo LED modules install with a plug-in 120V/277V rated line voltage wiring connector (UL and CSA Listed luminaire disconnect)
- This non-screw base connection preserves the high efficacy

rating and prevents use of low efficacy sources (see LED module specifications)

- LED connection is rated for 120V and 277V input. Installer must verify LED module voltage is compatible with the applicable voltage input. If uncertain, consult a qualified electrician.

Compliance

- cULus Listed 1598 luminaire
- cULus Listed for feed through
- cULus Listed for damp location
- cULus Listed for wet location, covered ceiling, with select trims
- cULus Listed for direct contact with insulation and combustible material*
- Air-Tite code compliant. Certified under ASTM E283; not exceeding 2.0 cfm (0.944 L/s) air leakage rate tested at a 1.57 psf (75 Pa) pressure differential.
- Rated for 20W maximum
- Use with designated HALO LED systems for ENERGY STAR® certification
- Can be used for State of California Title 24 high efficacy compliance with Title 20 Certified when used with designated Halo LED modules and trims
- Can be used for International Energy Conservation Code (IECC) high efficacy compliance with designated Halo LED modules and trims
- Refer to LED Product specification sheets online for additional compliance information
- RoHS compliant

*Not to be used in direct contact with spray foam insulation (Consult NEMA LSD57-2013)




H550ICAT

5" IC, New Construction, LED Housing

FOR USE IN INSULATED CEILINGS

FOR DIRECT CONTACT WITH INSULATION*

Dimensions

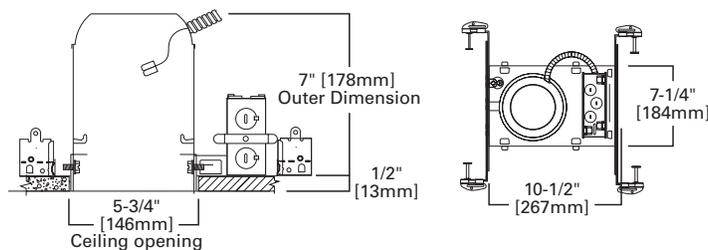

Special Features

- Got Nail!™ bar hangers
- q-Channel bars with Pass-N-Thru™
- Slide-N-Side™ junction box
- Quick Connect™ push wire nuts
- Air-Tite™ code compliant

Ordering Information

Sample Number: H550ICAT - ML5606930 - 593WB
Order housing, LED module, and trim separately.

Housing

H550ICAT = 5" IC, Air-Tite, New Construction, LED Housing

ML56 with 59x Series Trims

ML56 LED Light Modules

600 Series / 80 CRI

ML5606827= 5"/6" LED Retrofit Downlight Light Module, 600 lumen, 80CRI, 2700K
ML5606830= 5"/6" LED Retrofit Downlight Light Module, 600 lumen, 80CRI, 3000K
ML5606835= 5"/6" LED Retrofit Downlight Light Module, 600 lumen, 80CRI, 3500K
ML5606840= 5"/6" LED Retrofit Downlight Light Module, 600 lumen, 80CRI, 4000K

600 Series / 90 CRI

ML5606927= 5"/6" LED Retrofit Downlight Light Module, 600 lumen, 90CRI, 2700K
ML5606930= 5"/6" LED Retrofit Downlight Light Module, 600 lumen, 90CRI, 3000K
ML5606935= 5"/6" LED Retrofit Downlight Light Module, 600 lumen, 90CRI, 3500K
ML5606940= 5"/6" LED Retrofit Downlight Light Module, 600 lumen, 90CRI, 4000K

900 Series / 80 CRI

ML5609827= 5"/6" LED Retrofit Downlight Light Module, 900 lumen, 80CRI, 2700K
ML5609830= 5"/6" LED Retrofit Downlight Light Module, 900 lumen, 80CRI, 3000K
ML5609835= 5"/6" LED Retrofit Downlight Light Module, 900 lumen, 80CRI, 3500K
ML5609840= 5"/6" LED Retrofit Downlight Light Module, 900 lumen, 80CRI, 4000K

900 Series / 90 CRI

ML5609927= 5"/6" LED Retrofit Downlight Light Module, 900 lumen, 90CRI, 2700K
ML5609930= 5"/6" LED Retrofit Downlight Light Module, 900 lumen, 90CRI, 3000K
ML5609935= 5"/6" LED Retrofit Downlight Light Module, 900 lumen, 90CRI, 3500K
ML5609940= 5"/6" LED Retrofit Downlight Light Module, 900 lumen, 90CRI, 4000K

1200 Series / 80 CRI

ML5612827= 5"/6" LED Light Module, 1200 lumen, 80CRI, 2700K
ML5612830= 5"/6" LED Light Module, 1200 lumen, 80CRI, 3000K
ML5612835= 5"/6" LED Light Module, 1200 lumen, 80CRI, 3500K
ML5612840= 5"/6" LED Light Module, 1200 lumen, 80CRI, 4000K

1200 Series / 90 CRI

ML5612927= 5"/6" LED Light Module, 1200 lumen, 90CRI, 2700K
ML5612930= 5"/6" LED Light Module, 1200 lumen, 90CRI, 3000K
ML5612935= 5"/6" LED Light Module, 1200 lumen, 90CRI, 3500K
ML5612940= 5"/6" LED Light Module, 1200 lumen, 90CRI, 4000K

ML56 LED 5" Trims

590 Series - 5" LED Trims

591WB=5" LED Trim, Polymer "Dead-Front," Shallow White Baffle & Flange - Shallow and Standard housings (For use with 600 Series LED Light Modules only)

Reflectors

592SC=5" LED Trim, Specular Reflector & White Flange
592H=5" LED Trim, Haze Reflector & White Flange
592W=5" LED Trim, White Reflector & Flange

Baffles

593WB=5" LED Trim, White Micro-Step Baffle & Flange
593BB=5" LED Trim, Black Micro-Step Baffle & White Flange
593SNB=5" LED Trim, Satin Nickel Micro-Step Baffle & Flange
593TBZB=5" LED Trim, Tuscan Bronze Micro-Step Baffle & Flange

Semi-Regressed Eyeballs

594WB=5" LED Directional Trim, White Eyeball, Baffle & Flange - Shallow and Standard Housings
594SNB=5" LED Directional Trim, Satin Nickel Eyeball, Baffle & Flange - Shallow and Standard Housings
594TBZB=5" LED Directional Trim, Tuscan Bronze Eyeball, Baffle & Flange - Shallow and Standard Housings

Wall Wash

595WW=5" LED Trim, Wall Wash - Specular Reflector, Repositionable Specular Kick Reflector, White Flange

Shallow Baffle

596WB=5" LED Trim, White Shallow Baffle & Flange - Shallow and Standard Housings

ML56 System Accessories

TRM590WH=5" LED Oversize Trim Ring for use with ML56LED 59* series trims, White 6.3" I.D., 7.5" O.D. Ring slips over LED trim. Inset design allows 5" trim to fit into oversize ring for an even trim surface

WW595SC= 5" Wall wash insert - Kick reflector for 595WW (1-included with trim) double or corner wall wash

ML56 Beam Forming Optic / Media

1200 Series Accessories***

BFR56NFL=Beam forming reflector kit, narrow flood, 25°nominal
BFR56MH=Media holder, accepts one 3.45" lens. Requires BFR56NFL & L345SF, order separately.
L345SF=3.45" diameter soft focus lens. Requires BFR56NFL & BFR56MH, order separately.

***Beam forming optics/media not recommended for use with ML5612D2W930 LED module.

Ordering Information

The H550ICAT housing may also be used with Halo LED Modules and Surface LED Series.

LED Modules:

Compatible LED Series
RA56
RL56
LT56
SLD6

For details and ordering information refer to LED product specifications at www.eaton.com/lighting.