



FRAME PANEL

2x2'

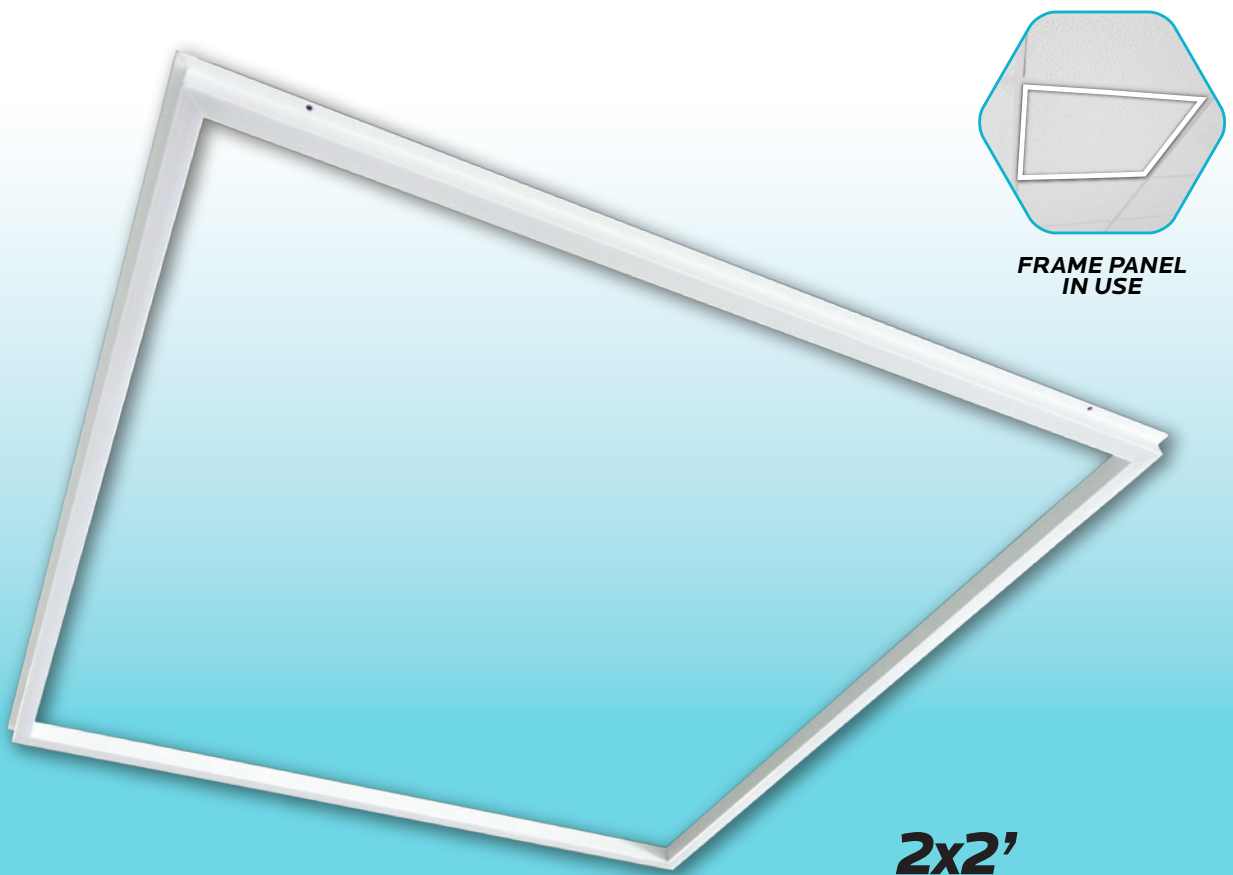

SPECIFICATIONS

ELECTRICAL


MODEL	DESCRIPTION	POWER	INPUT VOLTS	DIMMABLE	EFFICACY (LPW)	FREQUENCY	LIFETIME	POWER FACTOR
LR24190	LED40W2X2FRAME/30K/D	40	100-277	YES	100	50/60Hz	30,000	>0.9
LR24191	LED40W2X2FRAME/35K/D	40	100-277	YES	100	50/60Hz	30,000	>0.9
LR24192	LED40W2X2FRAME/40K/D	40	100-277	YES	100	50/60Hz	30,000	>0.9
LR24193	LED40W2X2FRAME/50K/D	40	100-277	YES	100	50/60Hz	30,000	>0.9
LR24194	LED40W2X2FRAME/65K/D	40	100-277	YES	100	50/60Hz	30,000	>0.9

PHOTOMETRIC

GENERAL

MODEL	COLOR (CCT)	TEMP	LUMEN	FLOOD	CRI	DAMP LOCATION	COST/YR	FINISH	UL LISTED
LR24190	3000K	SOFT WHITE	4000	120°	80	NO	\$ 4.82	WHITE	YES
LR24191	3500K	NATURAL	4000	120°	80	NO	\$ 4.82	WHITE	YES
LR24192	4000K	COOL WHITE	4000	120°	80	NO	\$ 4.82	WHITE	YES
LR24193	5000K	BRIGHT WHITE	4000	120°	80	NO	\$ 4.82	WHIT	YES
LR24194	6500K	DAYLIGHT	4000	120°	80	NO	\$ 4.82	WHITE	YES

DIMENSIONS

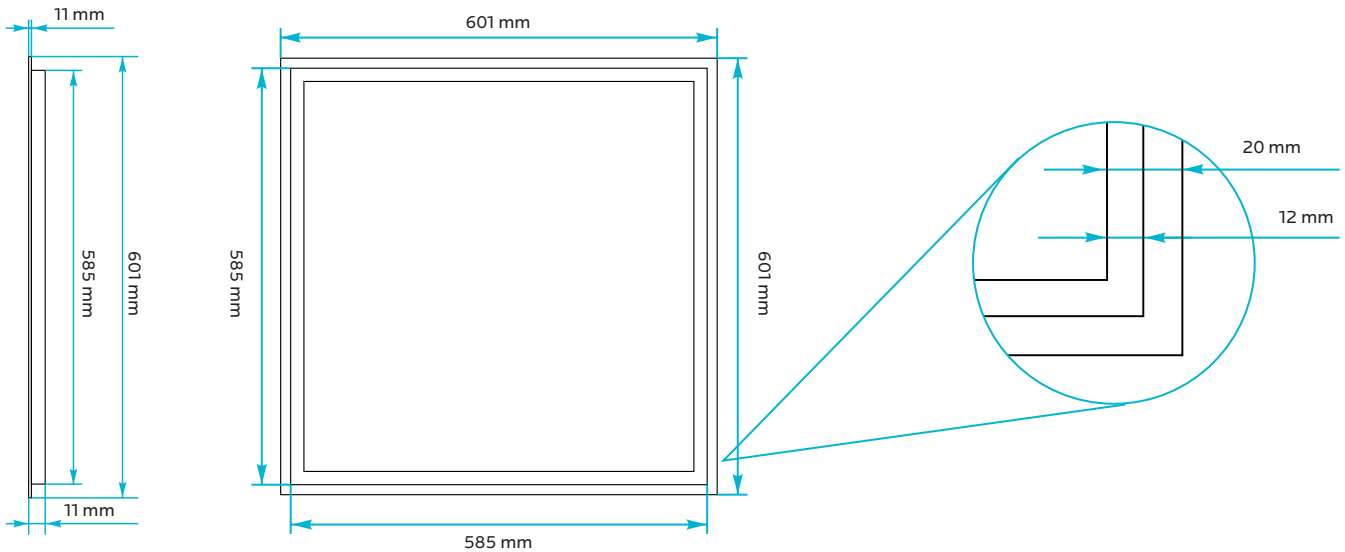

SUSPENSION KIT

MODEL	DESCRIPTION	LENGTH	MATERIAL
LR24199	LED40W2X2FRAME/SKIT	3.2 FT	COPPER/STEEL CABLE

